




MODEL NUMBER:

☐ 4931410 Pull-Down Bar Faucet

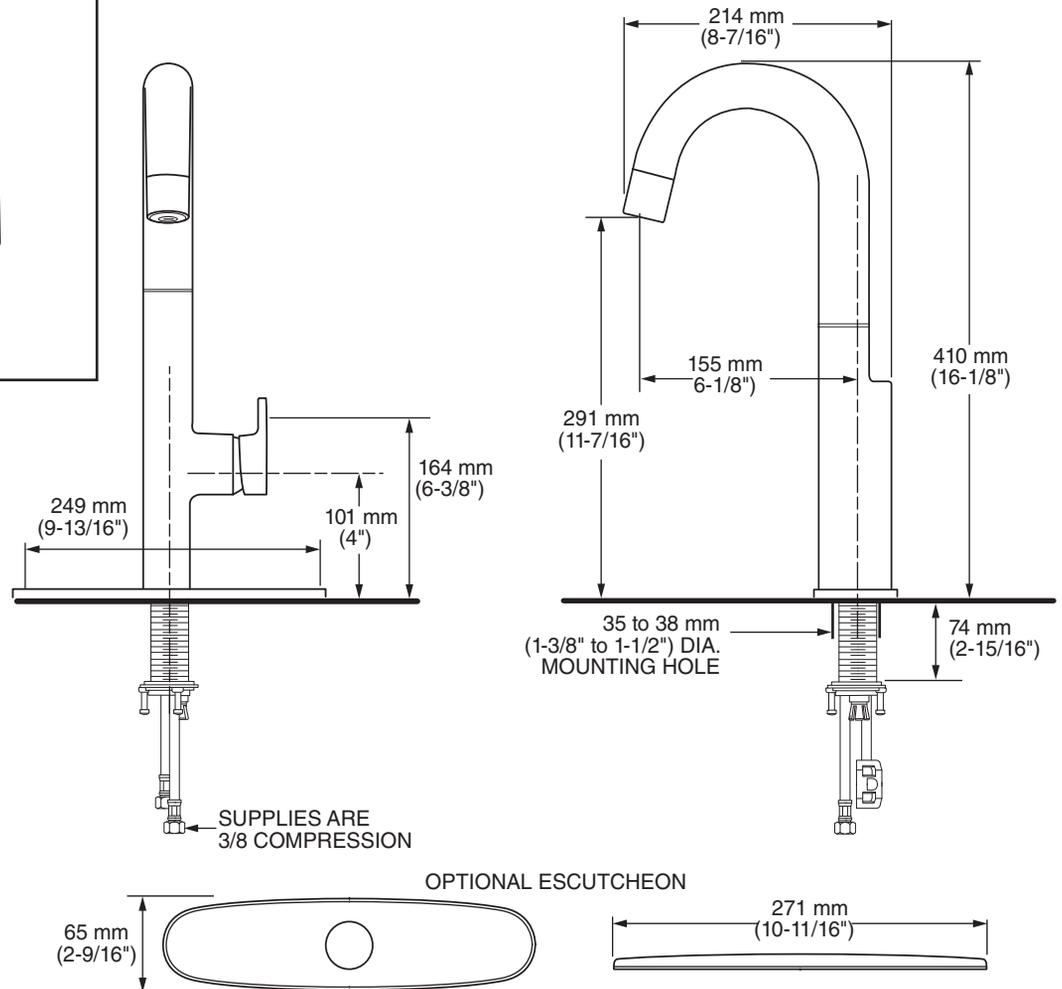

**GENERAL DESCRIPTION:**

Single control bar faucet featuring brass swivel spout and single function pull-down spray head. 35 mm ceramic disc valve cartridge, metal body and ADA metal lever handle. Includes integrated 39" color coded braided stainless steel supply hoses with 3/8" compression connections. Durable braided nylon spray hose is complete with two integral check valves. Maximum flow rate is 1.5 gpm / 5.7 L / min. Metal mounting shank with brass fixation ring. Fitting can be mounted with or without escutcheon plate (sold separately).

**PRODUCT FEATURES:**

- Re-Trax™ spray head retraction system:** Spray hose technology system to ensure smooth pull-out, operation, and retraction of spray head.
- Ceramic Disc Valve Cartridge:** Precise temperature and flow control with a lifetime of drip-free, maintenance-free performance.
- Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average.
- Integral Check Valves:** Prevents back flow.



ADA COMPLIANT

LEAD FREE


**SUGGESTED SPECIFICATION:**

Single control bar pull-down faucet shall feature a brass swivel spout with pull-down spray including two check valves, metal body and handle. Shall also feature 35 mm washerless ceramic disc valve cartridge and flexible Stainless Steel supply hoses. Faucet shall be American Standard Model # 4931410.\_\_\_\_\_.

**CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

- ANSI A117.1**
- ASME A112.18.1**
- CSA B125.1**
- NSF 61/Section 9**
- NSF 372**

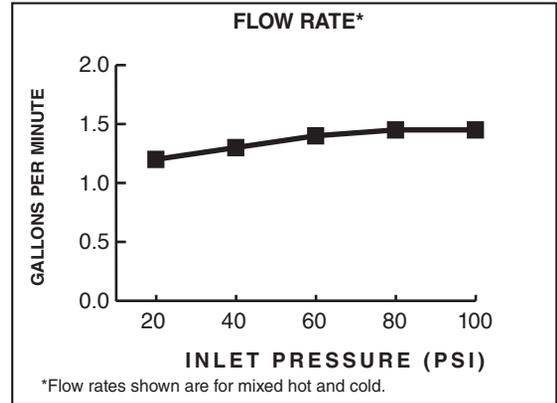

**1.5 gpm/5.7 L/min. FLOW RATE**

| Product Number | Description                 | Finish Options  |                     |
|----------------|-----------------------------|-----------------|---------------------|
|                |                             | Polished Chrome | PVD Stainless Steel |
|                |                             | 002             | 075                 |
| 4931410        | Beale Pull-Down Bar Faucet. |                 |                     |

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.