Ш

S

ш


 $\alpha$ 

 $\alpha$ 

Ш

## **Equility**<sup>™</sup> (Formerly LYNDON®) **Wall Tub Spout** Model D35109760

Thank you for selecting DXV. To ensure that your installation proceeds smoothly, please read these instructions carefully before you begin.




### **RECOMMENDED TOOLS AND MATERIALS**

Most of the procedures require the use of common tools and materials, which are available from hardware and plumbing supply stores. It is essential that the tools and materials be on hand before work is begun.



#### **ROUGHING-IN DIMENSIONS:**

• For reference

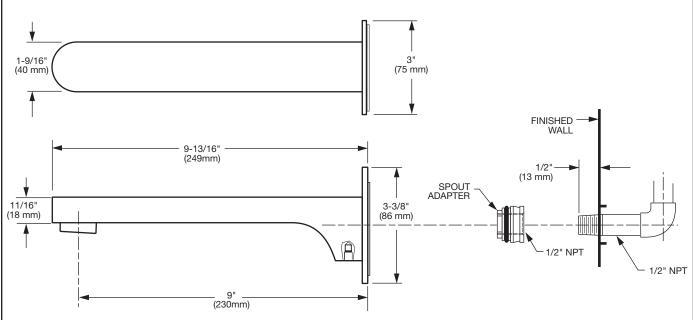

### In the United States:

One Centennial Avenue Piscataway, New Jersey 08855 Attention: Director of Customer Care

For residents of the United States, warranty information may also be obtained by calling the following toll free number: (800) 227-2734 www.DXV.com

### In Canada:

DXV 5900 Avebury Road Mississauga, Ontario L5R 3M3 Canada

Toll Free: 1-800-387-0369 Local: 905-306-1093 Fax: 1-800-395-1498 www.DXV.ca

### In Mexico:


DXV

Via Morelos 330 Col. Santa Clara Coatitla Ecatepec, Estado de México 55540

Toll Free: 01-800-8391200 www.DXV.mx


### INSTALL SEAL TO SPOUT ESCUTCHEON

• Remove BACKING (1) from ADHESIVE GASKET (2). Apply GASKET (2) to back of SPOUT ESCUTCHEON (3).




## 2 INSTALL SPOUT ADAPTER

• Remove PIPE CAP. Apply sealing tape to pipe nipple. With a 15-16" socket wrench, thread SPOUT ADAPTER (1) onto pipe nipple until SPOUT ESCUTCHEON (2) is tight against finished wall.





## INSTALL SPOUT



## 4 SECURE SPOUT

 Align TUB FILLER SPOUT (2). T ighten the two SET SCREWS (1) to secure TUB FILLER SPOUT (2) to SPOUT ADAPTER (3).



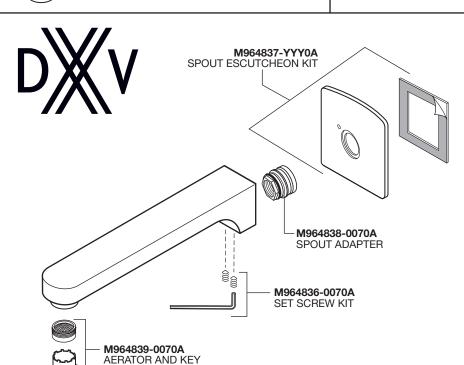

# **Equility**

(Formerly LYNDON®)

## **Wall Tub Spout**

**MODEL NUMBER** 

D35109760

Replace the "YYY" with appropriate finish code

	POLISHED CHROME	100
	BRUSHED NICKEL	144
	MATTE BLACK	243