

# COMMERCIAL SHOWER SYSTEM TRIM KIT FOR FLASH ROUGH SHOWER VALVE WITH 2.5 GPM / 9.5L/MIN. HAND SHOWER, SHOWERHEAD & TUB SPOUT



## MODEL NUMBER:

### □ TU662.224 Commercial Shower System Kit

Includes:

• Reliant3 Shower Only Trim	TU385501WDXH**
-Includes Pressure Balance Cartridge	
• 3-Function Hand Shower with Pause Feature	1660.767
• In-Line Vacuum Breaker	1660.400
• Metal Hose	8888.035
• Wall Supply	8888.037
• 36" Slide Bar	1660.236
• Heritage Diverter Handle	T342.430
• Slip-On Tub Spout	8888.056

\*\* Flash rough-in valve and 3-way diverter valve (R433) must be purchased separately

## GENERAL DESCRIPTION:

Commercial shower system trim kit includes metal valve trim, wall supply (with 1/2" NPT female inlet and 1/2" NPSM male outlet), a 59" (1500 mm) metal shower hose, vacuum breaker, a 3-function hand shower with non-positive shutoff, 3-way diverter trim kit, fixed showerhead, slip-on tub spout and a 36" slide bar. One-piece double ceramic pressure balance cartridge maintains a constant output temperature in response to changes in relative hot and cold supply pressure. Integral check valves prevent cross flow. Adjustable hot limit safety stop. Back-to-back capable. Durable valve trim with metal handle and escutcheon. Slide bar features an adjustable hand shower holder which can be set at any height or position along the bar and angle up to 45°. 2.5 gpm/9.5 L/min.

## PRESSURE BALANCE CARTRIDGE:

**One-Piece Cartridge:** Simplifies installation and maintenance.

### Double Ceramic Pressure Balance Cartridge:

Combination of ceramic disc mixing valve and a ceramic balancing spool in a one-piece cartridge.

**Ceramic Disc Mixing Valve:** Assures a lifetime of drip-free performance and smooth handle operation.

**Ceramic Balancing Spool:** Maintains a constant output temperature in response to changes in relative hot and cold supply pressure. Ceramic material is unaffected by mineral deposits and harsh water conditions.

**Integrated Check Valves:** Engineered to eliminate cross flow.

**Adjustable Hot Limit Safety Stop:** Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

**Comfort Zone:** Offers a wider range to fine tune the desired temperature.

**Back-to-Back Capability:** Hot and cold can be reversed quickly and easily.

**Trim Kit:** Metal escutcheon with metal lever. Red / blue indicator ring.


### HAND SHOWER WITH PAUSE FEATURE:

**ADA-Compliant:** Non-positive shut-off button on handle reduces flow to a trickle.

### 36" SLIDE BAR:

**Simple Height Adjustment:** Allows positioning of the hand shower anywhere along the bar.

**NOT DESIGNED TO BE A GRAB BAR.**

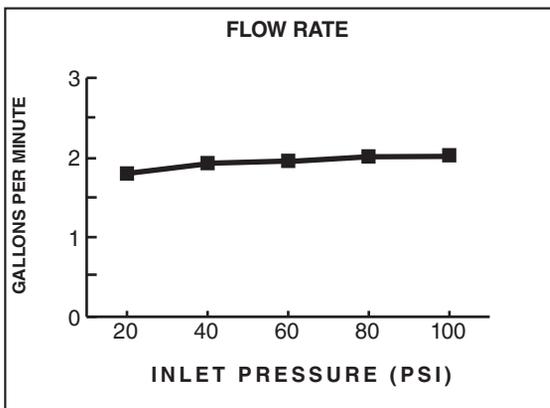

## SUGGESTED SPECIFICATION

Commercial shower system trim kit shall feature metal valve trim, wall supply (with 1/2" NPT female inlet and 1/2" NPSM male outlet), 59" metal hose, vacuum breaker, 2.5 gpm/9.5 L/min. 3-function hand shower with non-positive shut-off, 3-way diverter trim kit, 2.5 gpm/9.5 L/min. fixed showerhead, slip-on tub spout and a 36" slide bar. Shall also feature one-piece double ceramic pressure balance cartridge. Fitting shall be American Standard Model # TU662.224.002.

**CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

- ASME A112.18.1
- ASSE 1016
- CSA B 125
- ANSI A117.1

Product Number	Description	Finish
		Polished Chrome
		002

TU662.224	Commercial Shower System Trim Kit. Contains double ceramic pressure balance cartridge, valve trim kit, 3-function hand shower with non-positive shut-off, metal hose, vacuum breaker, 3-way diverter trim kit, fixed showerhead, wall supply, slip-on tub spout and 36" slide bar. 2.5 gpm/9.5 L/min. <b>** Flash rough-in valve and 3-way diverter valve (R433) must be purchased separately</b>
-----------	---

