

Integral Touchless Faucet / Soap Dispenser





CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1/CSA B125.1 **NSF/ANSI/CAN 372 NSF/ANSI/CAN 61**

PRODUCT FEATURES:


- Touchless Operation limits the spread of germs for a safer restroom
- Stylish single spout separately dispenses soap and water for a hygienic hand wash
- Easily adjustable sensor range
- Dispenses universal bulk foam soap. Eliminates the need for expensive proprietary soap
- Includes 1,800 ml soap bottle with quick disconnect
- Recommended Soap
 - Ecolab®, GoJo®, Cleaning Revolution® or other foam soap with viscosity between 1 - 20 cps
- Base Model: Option of Plug-In (PK00.PAC) or Hard-Wired AC (PK00.HAC) power kit (sold separately)
- Deck-mount design with brass spout
- Waterproof electronics
- Portion Control: 4 options to the amount of soap dispensed per activation
 - Maximum of 1,800 portions per 1.8L bottle
- Initialization Mode: Simplifies start-up by pumping soap through system
- Finishes: Polished Chrome (002)

MODEL NUMBER:

- ☐ 7762.112 Integral Faucet / Soap Dispenser, **Battery Powered**
 - Includes 4 D-sized alkaline batteries
- ☐ 776B.112 Integral Faucet / Soap Dispenser, **Base Model**
 - Selectronic AC power kit must be purchased separately

OPTIONAL 4" Deck Plate

☐ **7353.101P** 4" brass deck plate (6-5/16" x 2-1/2" x 3/8")

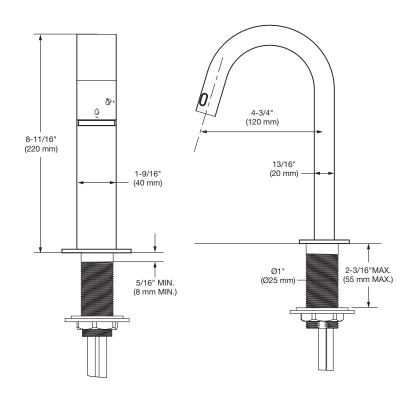









PART OF LIXIL

SUGGESTED SPECIFICATION

This touchless integral faucet / soap dispenser shall be sensor-operated to limit the spread of germs. Features brass spout with easily cleanable rubber nozzle and waterproof pump. Adjustable portion control knob allows for 4 options to control the amount of soap dispensed per activation. Soap Dispenser shall be American Standard Model # 776_112.002.



Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.

8/25 © 2025 AS America, Inc.