



ROXALYN® WALL-HUNG LAVATORY

- Wall-hung sink
- · Vitreous china
- · Front overflow
- Faucet ledge Shown with 7401.172H Amarilis Heritage faucet with Wrist Blade handles (not included)
- Designed for off-wall installation with 2" clearance from wall

Fa	ucet holes on 203mm (8") centers:
	0194.019 For exposed bracket support
	0194.076 For concealed arms support
	ucet holes on 102mm (4") centers (Illus.): 0195.016 For exposed bracket support 0195.073 For concealed arms support

Single faucet hole on right:

0194.035 For exposed bracket support0194.092 For concealed arms support

Single center faucet hole:

0194.225 For exposed bracket support0194.043 For concealed arms support

Nominal Dimensions:

508 x 457mm (20" x 18")

Bowl sizes:

362mm (14-1/4") wide 273mm (10-3/4") front to back 178mm (7") deep

Compliance Certifications Meets or Exceeds the Following Specifications:

• ASME A112.19.2 for Vitreous China Fixture



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

To Be Specified:


- ☐ Color: ☐ White
- □ Faucet*:
- ☐ Faucet Finish:
- Supplies:
- ☐ 1-1/4" Trap:
- Nipple:
- ☐ Bracket Support (if required):
 - ☐ 485742-600: 381mm (15") painted bracket
- ☐ Concealed Arms Support (by others):


^{*} See faucet section for additional models available



0194.019 EXPOSED BRACKET SUPPORT VARIATIONS


0194.076 CONCEALED ARMS SUPPORT VARIATIONS

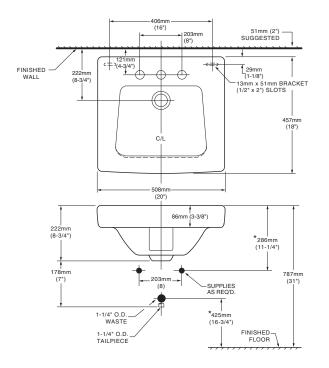


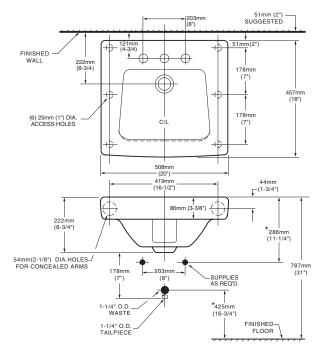

0195.016

0195.073

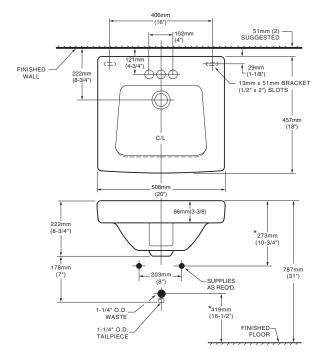

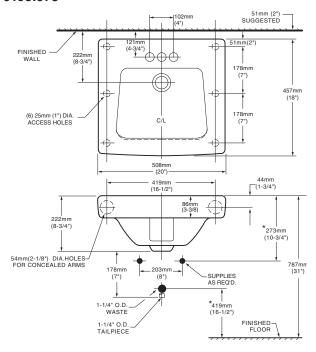

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

NOTES: * DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.

SHOWN WITH CENTERSET FTG. OR COMB. FTG., FLEX SUPPLIES, POP-UP DRAIN & 1-1/4" O.D. "P" TRAP. FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.


PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS. CONCEALED ARMS SUPPORT & EXPOSED BRACKET SUPPORT TO BE FURNISHED BY OTHERS.



0194.225 EXPOSED BRACKET SUPPORT VARIATION

51mm (2") SUGGESTED FINISHED 222mm (8-3/4") 13mm x 51mm BRACKET (1/2" x 2") SLOTS | 35mm (1-3/8") DIA. PUNCHING 457mm (18") _86mm (3-3/8") 222mm (8-3/4")

0194.092 CONCEALED ARMS SUPPORT VARIATION

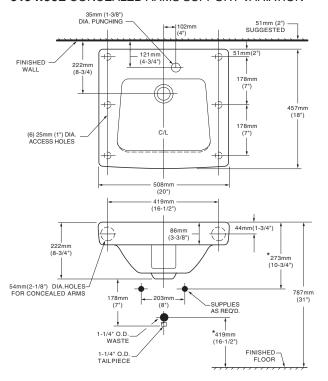

NOTES:

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.
FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.
CONCEALED ARMS SUPPORT & EXPOSED BRACKET SUPPORT TO BE FURNISHED BY OTHERS.

787mm (31")

FINISHED FLOOR

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.