



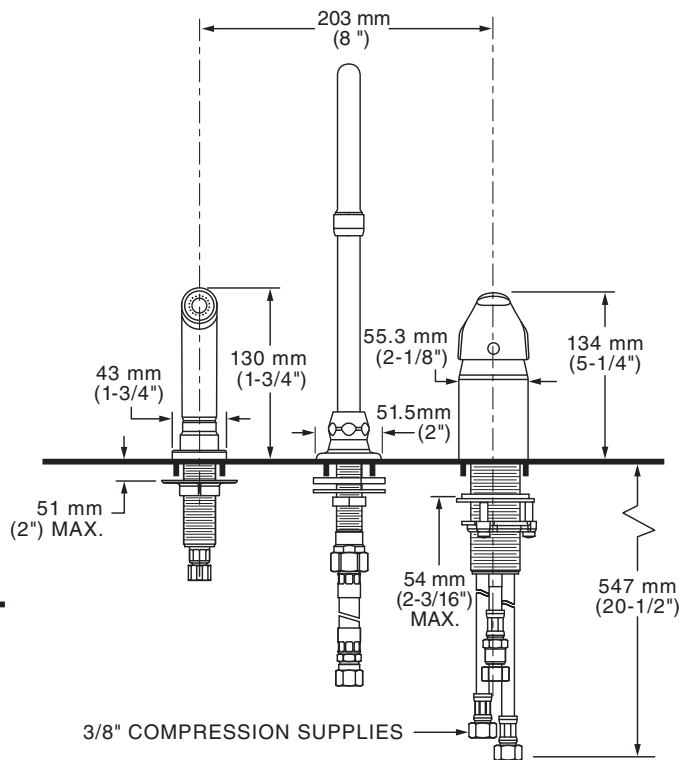

6114.381 Shown

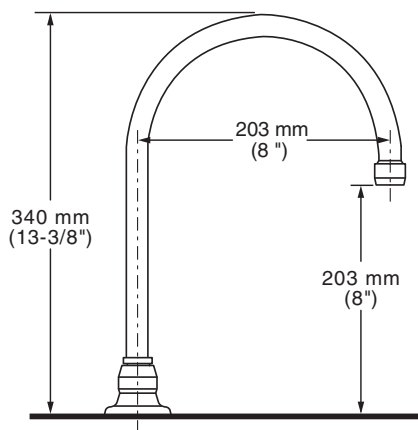

## GENERAL DESCRIPTION:

Durable cast brass construction. Field-convertible rigid-swivel gooseneck spout with 8" reach. Ceramic disc valve cartridge with integral hot limit safety stop. 20" long S.S. flex inlet hoses with 3/8" compression fittings. Metal lever handle with red/blue index. 1.5 gpm/5.7 L/min. maximum flow rate.

## PRODUCT FEATURES:

**Pressure Compensating Aerator:** Provides a constant water flow of 1.5 gpm throughout the pressure range.

**Solid Brass Construction:** Durable. Excellent in high use applications. Ideal for prolonged contact with water.

**Ceramic Disc Valve Cartridges:** Assure a lifetime of drip-free performance.

**Adjustable Hot Limit Safety Stop:** Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

**Field-Convertible Rigid / Swivel Gooseneck Spout:** Easily converted in the field.

**Lead Free:** Faucet contains  $\leq 0.25\%$  total lead content by weighted average.

## SUGGESTED SPECIFICATION

Single control kitchen fitting shall feature a brass body with metal handle and brass field convertible rigid /swivel gooseneck spout with 8" reach. Shall also feature washerless ceramic disc valve cartridge with integral hot limit safety stop. Fitting shall be American Standard Model #6114.38\_002.




**MONTERREY®**  
**SINGLE CONTROL KITCHEN FAUCET**  
**BRASS GOOSENECK SPOUT WITH 8" REACH**


## CODES AND STANDARDS

These products meet or exceed the following codes and standards:

**ASME A112.18.1**  
**CSA B125.1**  
**NSF 61/Section 9, Annex G**  
**CALGreen**

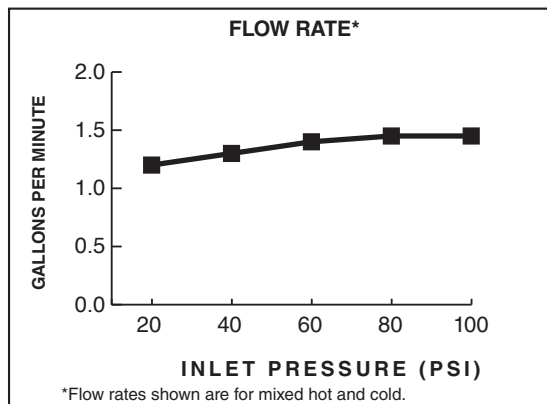

Product Number	Description	Finish
		Polished Chrome
		002
6114.381	Single Control Faucet with Remote Valve. Field-convertible rigid / swivel spout with 8" reach. 1.5 gpm pressure compensating aerator. With color matched spray.	
6114.380	Single Control Faucet with Remote Valve. Field-convertible rigid / swivel spout with 8" reach. 1.5 gpm pressure compensating aerator. LESS spray.	

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for accessible and usable building facilities - check local codes

### Other Aerators Available:

Part Suffix	Description
LV15	1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet
L15	1.5 gpm (5.7 Lpm) PCA Non-Aerated Laminar Flow Outlet
V15	1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Aerator
LV10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet
L10	1.0 gpm (3.8 Lpm) PCA Non-Aerated Laminar Flow Outlet
V10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Aerator
V05	0.5 gpm (1.9 Lpm) Vandal-Resistant PCA Multi-Laminar Spray
V035	0.35 gpm (1.3 Lpm) Vandal-Resistant PCA Multi-Laminar Spray

PCA - Pressure Compensating  
All modifications meet CALGreen Code

PART OF **LIXIL**