




6530.170 Shown

**MODEL NUMBER:\***

- ☐ **6530.170 Widespread Lavatory**  
1.5 gpm Pressure Compensating Aerator. Rigid gooseneck spout. Vandal-Resistant Wrist Blade Handles. Less drain and pop-up hole.
- ☐ **6532.170 Widespread Lavatory**  
1.5 gpm Pressure Compensating Aerator. Rigid gooseneck spout. Vandal-Resistant Wrist Blade Handles. Grid strainer drain.
- ☐ **6530.140 Widespread Lavatory**  
1.5 gpm Pressure Compensating Aerator. Rigid gooseneck spout. Vandal-Resistant Lever Handles. Less drain and pop-up hole.
- ☐ **6532.140 Widespread Lavatory**  
1.5 gpm Pressure Compensating Aerator. Rigid gooseneck spout. Vandal-Resistant Lever Handles. Grid strainer drain.

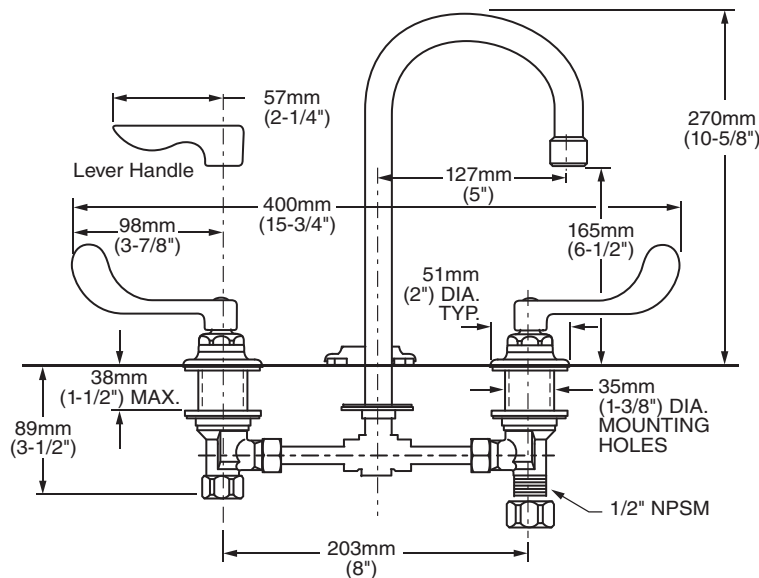

**GENERAL DESCRIPTION:**

Durable cast brass construction. Cast brass valve bodies with 8" rigid copper connection with compression fittings. 1/2" male threaded inlet shanks with brass coupling nuts. 1/4 turn ceramic disc valve cartridges. Choice of Vandal-Resistant Lever or Wrist Blade handles with blue & red color indexes. All brass drain body with 1 1/4" (32mm) tailpiece (on applicable models). 1.5 gpm/5.7L/min. maximum flow rate.

**PRODUCT FEATURES:**

**Pressure Compensating Aerator:** Provides a constant water flow of 1.5 gpm throughout the pressure range.

**Solid Brass Construction:** Durable - Excellent in high use applications. Ideal for prolonged contact with water.

**Ceramic Disc Valve Cartridges:** Assures a lifetime of drip-free performance.

**Lead Free:** Faucet contains  $\leq 0.25\%$  total lead content by weighted average.

**SUGGESTED SPECIFICATION:**

Two handle widespread lavatory faucet shall feature cast brass valve bodies with 8" rigid copper connection. Shall feature water-conserving 1.5 gpm/5.7L/min. pressure compensating aerator. Vandal-Resistant handles. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # 653\_...002.




# MONTERREY™

## TWO-HANDLE 8" WIDESPREAD LAVATORY FAUCET WITH RIGID GOOSENECK SPOUT

### CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1  
CSA B 125  
NSF 372

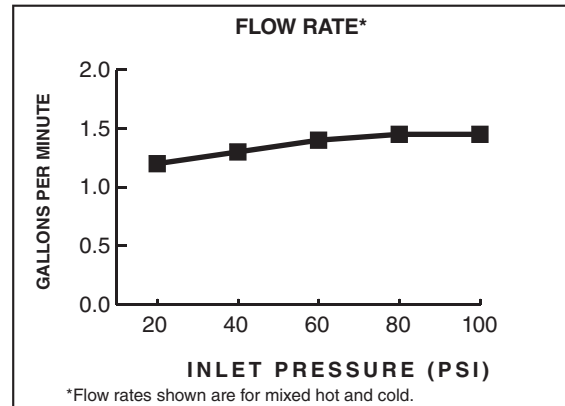

Product Number	Description	Finish
		Polished Chrome
		002
6530.170	Widespread Lavatory with rigid gooseneck spout. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Wrist Blade Handles. Less drain and pop-up hole.	
6532.170	Widespread Lavatory with rigid gooseneck spout. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Wrist Blade Handles. Grid strainer drain.	
6530.140	Widespread Lavatory with rigid gooseneck spout. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Lever Handles. Less drain and pop-up hole.	
6532.140	Widespread Lavatory with rigid gooseneck spout. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Lever Handles. Grid strainer drain.	

 MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES  
AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND  
USABLE BUILDING FACILITIES-CHECK LOCAL CODES

### Other Aerators Available:

Part Suffix	Description
LV15	1.5 gpm (5.7 Lpm) PCA Vandal-Resistant Non-Aerated Laminar Flow Outlet
V15	.5 gpm (5.7 Lpm) PCA Vandal-Resistant Aerator
LV10	1.0 gpm (3.8 Lpm) PCA Vandal-Resistant Non-Aerated Laminar Flow Outlet
V10	1.0 gpm (3.8 Lpm) PCA Vandal-Resistant Aerator
V05	0.5 gpm (1.9 Lpm) PCA Vandal-Resistant Multi-Laminar Spray
V035**	0.35 gpm (1.3 Lpm) PCA Vandal-Resistant Multi-Laminar Spray

\*PCA - Pressure Compensating

\*\*Meets Cal Green Code