




6530.170 Shown

MODEL NUMBER:*

- ☐ **6530.170 Widespread Lavatory**
1.5 gpm Pressure Compensating Aerator. Rigid gooseneck spout. Vandal-Resistant Wrist Blade Handles. Less drain and pop-up hole.
- ☐ **6532.170 Widespread Lavatory**
1.5 gpm Pressure Compensating Aerator. Rigid gooseneck spout. Vandal-Resistant Wrist Blade Handles. Grid strainer drain.
- ☐ **6530.140 Widespread Lavatory**
1.5 gpm Pressure Compensating Aerator. Rigid gooseneck spout. Vandal-Resistant Lever Handles. Less drain and pop-up hole.
- ☐ **6532.140 Widespread Lavatory**
1.5 gpm Pressure Compensating Aerator. Rigid gooseneck spout. Vandal-Resistant Lever Handles. Grid strainer drain.

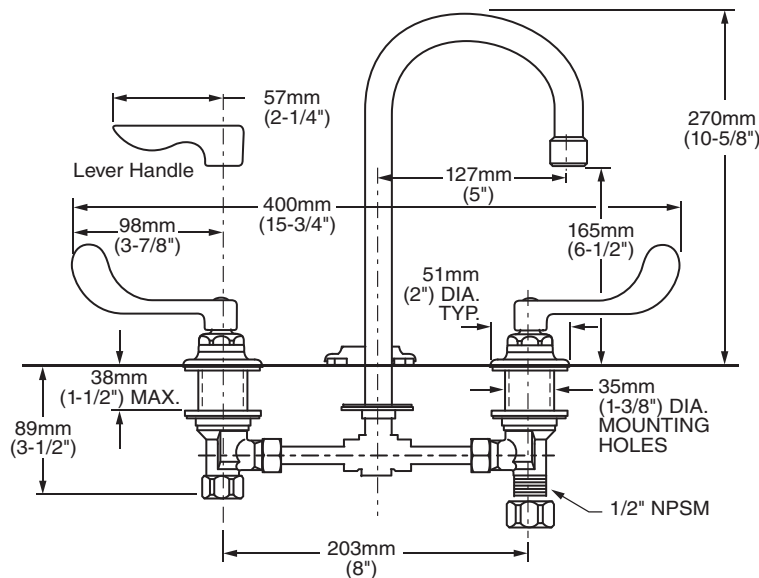

GENERAL DESCRIPTION:

Durable cast brass construction. Cast brass valve bodies with 8" rigid copper connection with compression fittings. 1/2" male threaded inlet shanks with brass coupling nuts. 1/4 turn ceramic disc valve cartridges. Choice of Vandal-Resistant Lever or Wrist Blade handles with blue & red color indexes. All brass drain body with 1 1/4" (32mm) tailpiece (on applicable models). 1.5 gpm/5.7L/min. maximum flow rate.

PRODUCT FEATURES:

Pressure Compensating Aerator: Provides a constant water flow of 1.5 gpm throughout the pressure range.

Solid Brass Construction: Durable - Excellent in high use applications. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Lead Free: Faucet contains $\leq 0.25\%$ total lead content by weighted average.

SUGGESTED SPECIFICATION:

Two handle widespread lavatory faucet shall feature cast brass valve bodies with 8" rigid copper connection. Shall feature water-conserving 1.5 gpm/5.7L/min. pressure compensating aerator. Vandal-Resistant handles. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # 653_._.002.




MONTERREY™

TWO-HANDLE 8" WIDESPREAD LAVATORY FAUCET WITH RIGID GOOSENECK SPOUT

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1
CSA B 125
NSF 372

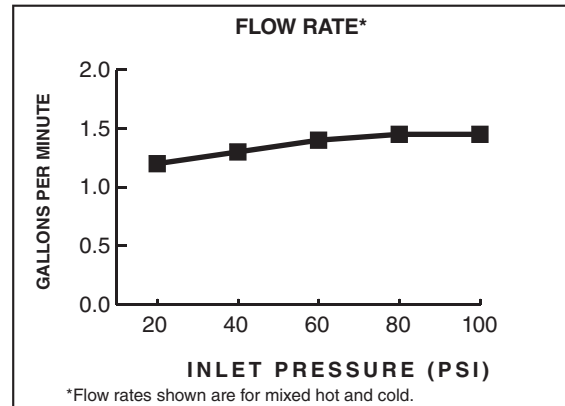

Product Number	Description	Finish
		Polished Chrome
		002
6530.170	Widespread Lavatory with rigid gooseneck spout. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Wrist Blade Handles. Less drain and pop-up hole.	
6532.170	Widespread Lavatory with rigid gooseneck spout. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Wrist Blade Handles. Grid strainer drain.	
6530.140	Widespread Lavatory with rigid gooseneck spout. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Lever Handles. Less drain and pop-up hole.	
6532.140	Widespread Lavatory with rigid gooseneck spout. 1.5 gpm/5.7L/min pressure compensating aerator. Vandal-Resistant Lever Handles. Grid strainer drain.	

 MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES
AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND
USABLE BUILDING FACILITIES-CHECK LOCAL CODES

Other Aerators Available:

Part Suffix	Description
LV15	1.5 gpm (5.7 Lpm) PCA Vandal-Resistant Non-Aerated Laminar Flow Outlet
V15	.5 gpm (5.7 Lpm) PCA Vandal-Resistant Aerator
LV10	1.0 gpm (3.8 Lpm) PCA Vandal-Resistant Non-Aerated Laminar Flow Outlet
V10	1.0 gpm (3.8 Lpm) PCA Vandal-Resistant Aerator
V05	0.5 gpm (1.9 Lpm) PCA Vandal-Resistant Multi-Laminar Spray
V035**	0.35 gpm (1.3 Lpm) PCA Vandal-Resistant Multi-Laminar Spray

*PCA - Pressure Compensating

**Meets Cal Green Code