


MONTERREY™ 0.5 GPM
TWO-HANDLE 8" WIDESPREAD LAVATORY FAUCET
RIGID/SWIVEL GOOSENECK SPOUT WITH 5" REACH



6540.175 Shown

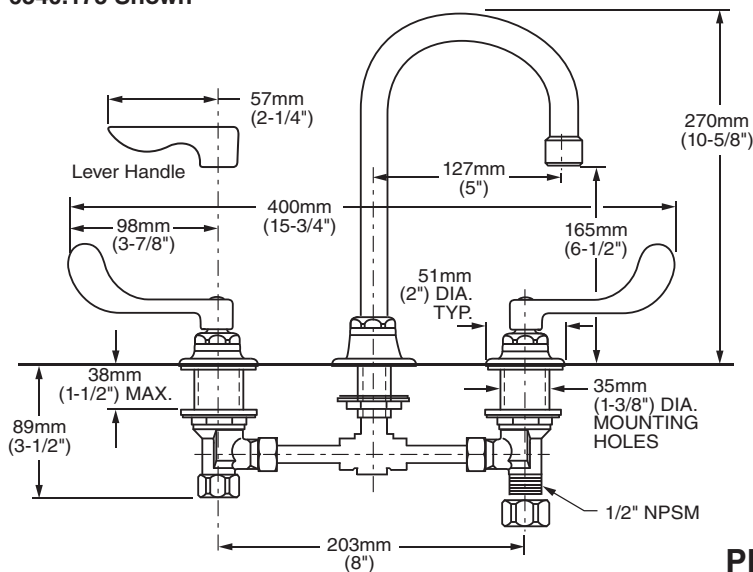

GENERAL DESCRIPTION:

Durable cast brass construction. Cast brass valve bodies with 8" rigid copper connection with compression fittings. 1/2" male threaded inlet shanks with brass coupling nuts. 1/4 turn ceramic disc valve cartridges. Field-convertible rigid/swivel gooseneck spout. Choice of Vandal-Resistant Lever or Wrist Blade handles with blue & red color indexes. All brass drain body with 1 1/4" (32mm) tailpiece (on applicable models). 0.5 gpm/1.9L/min. maximum flow rate.

SUGGESTED SPECIFICATION:

Two handle widespread lavatory faucet shall feature cast brass valve bodies with 8" rigid copper connection. Shall feature water-conserving vandal-resistant 0.5 gpm/1.9L/min. pressure compensating multi-laminar spray. Vandal-Resistant handles. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature convertible rigid/swivel spout. Fitting shall be American Standard Model # 654 .1 5.002.

MODEL NUMBER:

-  **6540.175 Widespread Lavatory**
0.5 gpm Pressure Compensating Vandal-Resistant Multi-Laminar Spray. Convertible rigid/swivel gooseneck spout. Vandal-Resistant Wrist Blade Handles. Less drain and pop-up hole.
-  **6542.175 Widespread Lavatory**
0.5 gpm Pressure Compensating Vandal-Resistant Multi-Laminar Spray. Convertible rigid/swivel gooseneck spout. Vandal-Resistant Wrist Blade Handles. Grid strainer drain.
-  **6540.145 Widespread Lavatory**
0.5 gpm Pressure Compensating Vandal-Resistant Multi-Laminar Spray. Convertible rigid/swivel gooseneck spout. Vandal-Resistant Lever Handles. Less drain and pop-up hole.
-  **6542.145 Widespread Lavatory**
0.5 gpm Pressure Compensating Vandal-Resistant Multi-Laminar Spray. Convertible rigid/swivel gooseneck spout. Vandal-Resistant Lever Handles. Grid strainer drain.

PRODUCT FEATURES:

Pressure Compensating Multi-Laminar Spray:
Provides a constant water flow of 0.5 gpm throughout the pressure range. No mix of air and water.

Solid Brass Construction: Durable - Excellent in high use applications. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Field-Convertible Rigid/Swivel Spout: Easily converted in the field.

Lead Free: Faucet contains $\leq 0.25\%$ total lead content by weighted average.



MONTERREY™ 0.5 GPM


TWO-HANDLE 8" WIDESPREAD LAVATORY FAUCET

RIGID/SWIVEL GOOSENECK SPOUT WITH 5" REACH

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1
ASME A112.18.1
CSA B 125
NSF 372

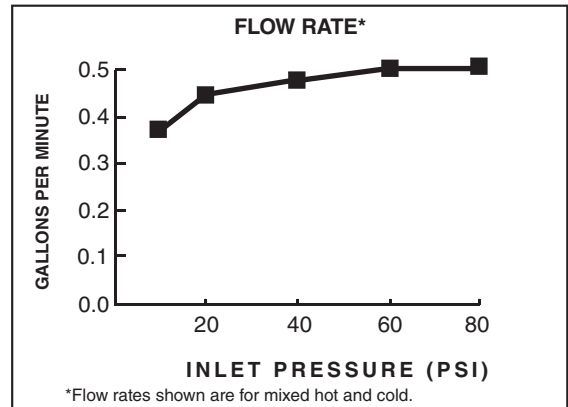

Product Number	Description	Finish
		Polished Chrome
		002
6540.175	Widespread Lavatory with convertible rigid/swivel gooseneck spout. 0.5 gpm/1.9L/min pressure compensating vandal-resistant multi-laminar spray. Vandal-Resistant Wrist Blade Handles. Less drain and pop-up hole.	
6542.175	Widespread Lavatory with convertible rigid/swivel gooseneck spout. 0.5 gpm/1.9L/min pressure compensating vandal-resistant multi-laminar spray. Vandal-Resistant Wrist Blade Handles. Grid strainer drain.	
6540.145	Widespread Lavatory with convertible rigid/swivel gooseneck spout. 0.5 gpm/1.9L/min pressure compensating vandal-resistant multi-laminar spray. Vandal-Resistant Lever Handles. Less drain and pop-up hole.	
6542.145	Widespread Lavatory with convertible rigid/swivel gooseneck spout. 0.5 gpm/1.9L/min pressure compensating vandal-resistant multi-laminar spray. Vandal-Resistant Lever Handles. Grid strainer drain.	



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES
AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND
USABLE BUILDING FACILITIES-CHECK LOCAL CODES