

WASHBROOK™ FloWise® 0.125 ULTRA HIGH EFFICIENCY URINAL

- Vitreous china
- Ultra High Efficiency (0.5 Lpf/0.125gpf)
- Flushing rim
- Elongated 14" rim from finished wall
- Washout flush action
- Extended sides for privacy
- 3/4" inlet spud
- Outlet connection threaded 2" inside (NPTF)
- 2 wall hangers
- Fixture only
- Meets ASME flush requirements at 0.125 gpf

☐ **6590.125** Top spud

☐ **6515.125** Back spud

Nominal Dimensions:

355 x 470 x 692mm
(14" x 18-1/2" x 27-1/4")

Recommended working pressure – between
20 psi at valve when flushing and 80 psi static

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures



SEE REVERSE FOR ROUGHING-IN DIMENSIONS

To Be Specified:

☐ Color: ☐ White


☐ Flush Valve:

☐ American Standard Selectronic™ #6063.013.002
DC Power (Top Spud)


☐ American Standard Selectronic™ #6063.301.007
DC Power (Back Spud)



6590.125 TOP SPUD

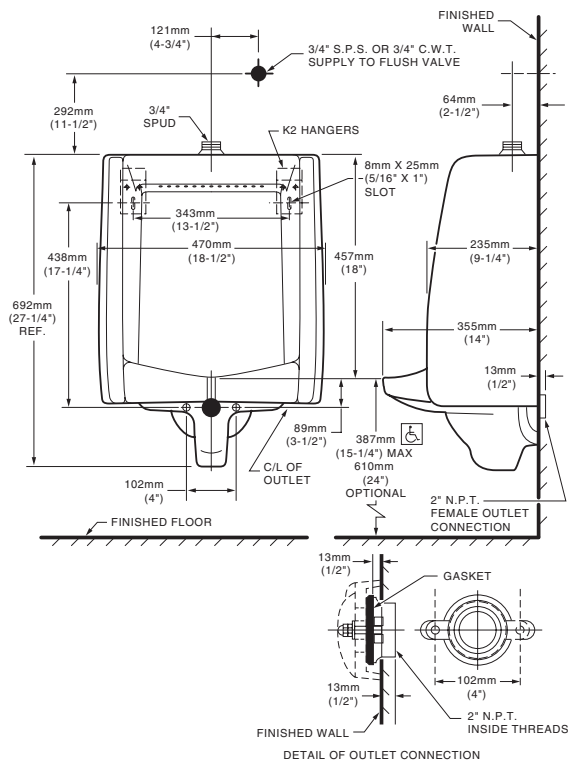

6515.125 BACK SPUD

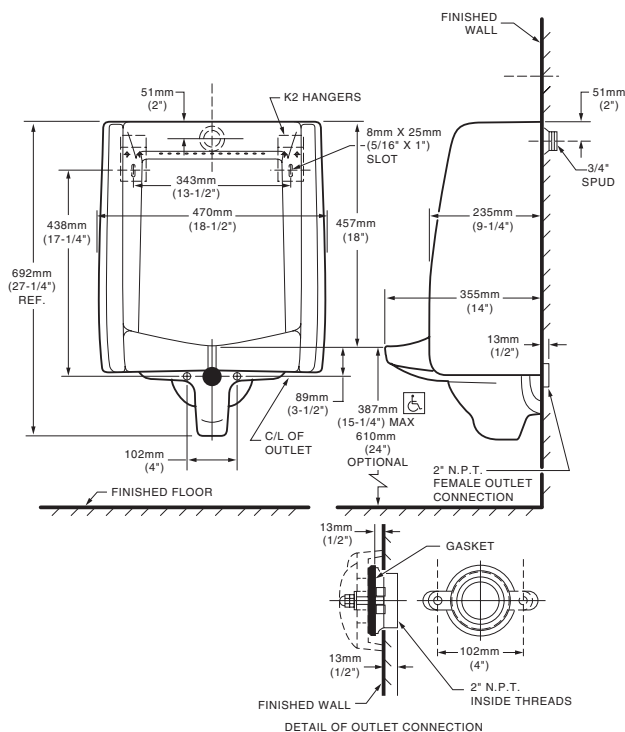

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.

- When installed so top of rim is 387mm (15-1/4") from finished floor.

NOTES:

FLUSH VALVE NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.