

TU612502 Bath/Shower Trim Shown

**GENERAL DESCRIPTION:**

**Double Ceramic Pressure Balance Cartridge:** Features one-piece design with ceramic discs and ceramic balancing spool. Includes integrated check valves and hot limit safety stop. Cartridge available for back to back capability. Ceramic balancing spool maintains constant output temperature in response to changes in relative hot and cold supply pressure. Washerless ceramic discs provide smooth handle movement and are unaffected by harsh water conditions.

**Trim:** Features 5-13/16" (147 mm) showerhead with a maximum 1.8 gpm/6.8 L/min. flow rate. Metal slip-on diverter spout. Metal wall valve trim with metal lever.

**PRODUCT FEATURES**

**One-Piece Cartridge:** Simplifies installation and maintenance.

**Double Ceramic Pressure Balance Cartridge:** Combination of Ceramic Disc Mixing Valve and a Ceramic Balancing Spool in a one-piece cartridge.

**Ceramic Disc Mixing Valve:** Assures a lifetime of drip-free performance and smooth handle operation.

**Ceramic Balancing Spool:** Maintains a constant output temperature in response to changes in relative hot and cold supply pressure. Ceramic material is unaffected by mineral deposits and harsh water conditions.

**Integrated Check Valves:** Engineered to eliminate cross flow.

**Adjustable Hot Limit Safety Stop:** Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

**Comfort Zone:** Offers a wider shower range to fine tune the desired temperature within the useful temperature zone.



**Back-to-Back Capability:** Hot and cold can be reversed quickly and easily.

**MODEL NUMBER:**

**TRIM KITS:**

- ❑ **TU612502 Crawford Bath/Shower Trim Kit with Pressure Balance Cartridge**  
Lever handle. LESS valve body.
- ❑ **TU612501 Crawford Shower ONLY Trim Kit with Pressure Balance Cartridge**  
Lever handle. LESS valve body.

**For use with Flash™ Rough Valve Bodies**

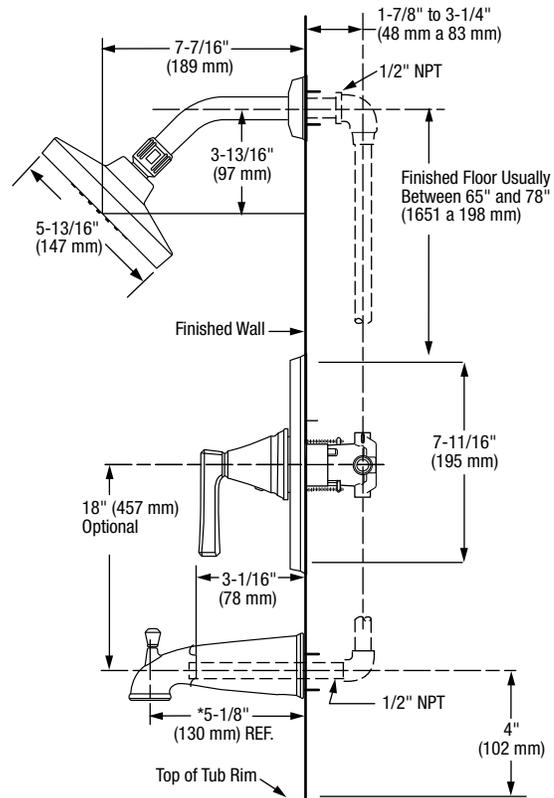


**SUGGESTED SPECIFICATION**

Bath/shower fitting shall feature showerhead with Max. 1.8 gpm/6.8 L/min. flow rate. Shall feature double ceramic pressure balance cartridge. Cartridge shall feature integrated check valves to eliminate cross flow. Capable of meeting ASSE1016 @1.3gpm. Cartridge shall also feature hot limit safety stop. Fitting shall be:  
 American Standard - Trim Kit Model # TU612502\_... and Flash Valve Body Model # RUXXX (valve sold separately).

**CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

- ASSE 1016/ASME A112.1016/CSA B125.16**
- ASME A112.18.1**
- CSA B125.1**

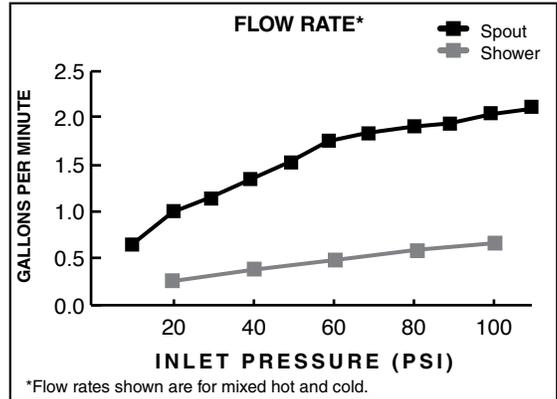

TRIM KITS *	Product Number	Description	Finish Options			
			Polished Chrome	Polished Nickel	Legacy Bronze	PVD Brushed Nickel
			002	013	278	295
TU612502	Bath/Shower Trim Kit. Metal lever handle. LESS valve body.					
TU612501	Shower Only Trim Kit. Metal lever handle. LESS valve body. 					

**\* TRIM & ROUGH MUST BE ORDERED SEPARATELY.**

OPTIONAL ACCESSORY	Product Number	Product Description
	M970649-YYY0A	Deep Rough-In Kit