

### Cadet Elongated Pressure-Assisted Toilet 1.6 gpf / 6.0 Lpf

VITREOUS CHINA

# Cadet FloWise Elongated Pressure-Assisted Toilet 1.6 gpf/ 6.0 Lpf

#### **2462.016**

- Vitreous china
- Low-consumption (1.6 gpf/6.0 Lpf)
- EverClean® surface inhibits the growth of stain- and odor-causing bacteria, mold, and mildew on the surface
- Elongated bowl
- Pressure-assisted siphon jet flush action
- Fully-glazed 2-1/8" trapway
- 10 x 12" water surface area
- Metal chrome trip lever
- Close-coupled flushometer tank\*
- Speed Connect® tank/bowl coupling system
- 2 bolt caps
- 100% factory flush tested
- 12" Rough-in

3481.016 Bowl with two bolt caps
3481.001 Same as above, Universal Bowl
4142.016 Tank complete with coupling components

#### **Nominal Dimensions:**

768 x 521 x 743mm (30-1/4" x 20-1/2" x 29-1/4")

Fixture only, seat and supply by others

Recommended working pressure range 25 psi - 80 psi

#### **Alternate Configurations Available:**

- 4142.600 Tank and tank cover only with tank cover locking device
- 4142.800 Tank and tank cover only with right hand trip lever
- 4142.900 Tank complete with right hand trip lever and tank cover locking device


## **Compliance Certifications - Meets or Exceeds the Following Specifications:**

 ASME A112.19.2-2008 / CSA B45.1-08 for Vitreous China Fixtures

#### To Be Specified:

- □ Color: □ White
- Seat: American Standard #550BA00B Transitional slow-close solid plastic closed front seat with cover
- American Standard #5259A65MT Cardiff Ever-Clean® slow-close solid plastic closed front seat with cover
- Alternate Seat:
- ☐ Supply with Stop:



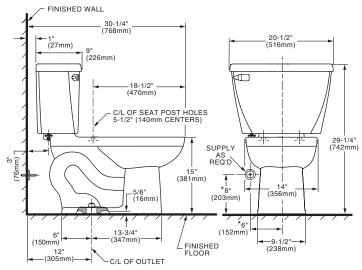

#### NOTES:

THIS COMBINATION IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. \* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME A112.19.2-2008 / CSH B45.1-08. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.