

Cadet FloWise[®] Elongated Pressure-Assisted Toilet 1.1 gpf / 4.2 Lpf VITREOUS CHINA

Cadet FloWise Elongated Pressure-Assisted Toilet 1.1 gpf / 4.2 Lp

2462.100

- Vitreous china
- High Efficiency, Ultra Low-consumption (1.1 gpf/4.2 Lpf)
- EverClean® surface inhibits the growth of stain and odor-causing bacteria, mold, and mildew on the surface
- Meets EPA WaterSense[®] criteria
- Elongated bowl
- Pressure-assisted siphon jet flush action
- Fully-glazed 2-1/8" trapway
- 10 x 12" water surface area
- Metal chrome trip lever
- Close-coupled flushometer tank*
- Speed Connect[®] tank/bowl coupling system
- 2 bolt caps
- 100% factory flush tested
- 12" Rough-in
- 3481.100 Bowl with two bolt caps
- 3481.001 Same as above, Universal Bowl
- 4142.100 Tank complete with coupling components

Nominal Dimensions:

768 x 521 x 743mm (30-1/4" x 20-1/2" x 29-1/4")

Fixture only, seat and supply by others

Recommended working pressure range 25 psi - 80 psi

Alternate Configurations Available:

- 4142.601 Tank and tank cover only with tank cover locking device
- 4142.801 Tank and tank cover only with right hand trip lever
- 4142.901 Tank complete with right hand trip lever and tank cover locking device


Compliance Certifications -

- Meets or Exceeds the Following Specifications: • ASME A112.19.2-2008 / CSA B45.1-08 for Vitreous China Fixtures
- US EPA WaterSense[®] Specification for HET's

To Be Specified:

- □ Color: □ White
- Seat: American Standard #550BA00B Transitional slow-close solid plastic closed front seat with cover
- American Standard #5259A65MT Cardiff EverClean® slow-close solid plastic closed front seat with cover
- Alternate Seat:
- □ Supply with Stop:



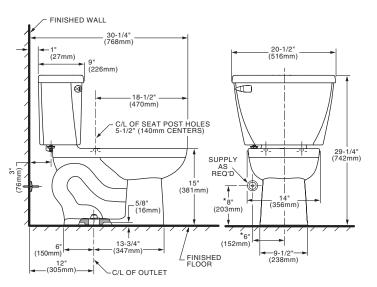

NOTES

THIS COMBINATION IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. * DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY

FOR ADDITIONAL INFORMATION REFER TO INSTALLATION INSTRUCTIONS SUPPLIED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME A112.19.2-2008 / CSH B45.1-08. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.





EVERCLEAN EFFICIENT

© 2021 AS America Inc.

12

WATER