## American Standard

# STUDIO<sup>®</sup> CARRÉ DROP IN SINK

**BARRIER FREE** 

## STUDIO<sup>®</sup> CARRÉ DROP IN SINK

- □ 0642.008 Faucet holes on 8" (203mm) centers (illustrated)
- 0642.001 Center hole only
  - Square self-rimming drop in sink with rectangular curved bottom bowl
  - Made from vitreous china
  - Rear overflow
  - Cutout template supplied
  - Faucet ledge (Faucet not included)
  - Shown with Tropic 7038.801 Widespread Faucet (Not included)


#### **Nominal Dimensions:**

16-3/8" x 16-3/8" (415 x 415mm)

#### Bowl sizes:

12-1/2" (320mm) wide 9-3/8" (238mm) front to back 4-3/4" (121mm) deep



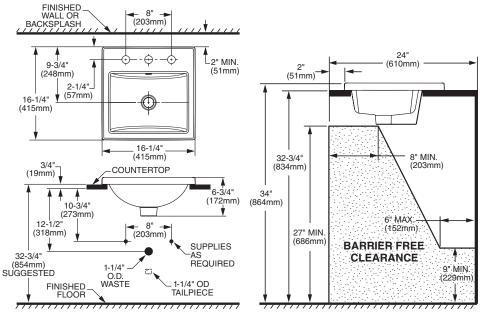

### Compliance Certifications -Meets or Exceeds the Following Specifications:

 ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixture

#### To Be Specified:

- Color: White
- Faucet\*:
- Faucet Finish:
- Supplies:
- □ 1-1/4" Trap:

\* See faucet section for additional models available

NOTES: \* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED.

FOR COUNTERTOP CUTOUT AND INSTALLATION INSTRUCTIONS USE TEMPLATE SUPPLIED WITH SINK. FITTINGS NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED

FIT INGS NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY. SEALING COMPOUND SUPPLIED BY OTHERS.

SEALING COMPOUND SUPPLIED BY OTHERS.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



#### MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ICC ANSI A117.1 ACCESSIBLE AND USABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES. Install lavatory 864mm (34") from finished floor.

Lavatory installed 51mm (2") minimum from front edge of countertop provides 686mm (27") knee clearance area.