

**SCALA® CORNER WHIRLPOOL AND
BATHING POOL**

- ☐ **2664.218C Whirlpool featuring System I,
Left-hand drain outlet**
- ☐ **2664.118C Whirlpool featuring System I,
Right-hand drain outlet**
 - Acrylic with fiberglass reinforcement
 - EverClean® System
 - Pre-leveled tub bottom
 - Integral 2-sided tile/water retention flange
 - Dual, molded lumbar back rests
 - 1.25 HP single speed, self-draining pump/motor
 - Factory installed power cord with plug
 - Six multi-directional and flow-adjustable jets
 - Deck-mounted air switch On/Off
 - Two air volume controls
 - Factory installed and tested whirlpool system
- ☐ **2664.218 Whirlpool, Left-hand Drain Outlet**
- ☐ **2664.118 Whirlpool, Right-hand Drain Outlet**
 - Same as above except without the EverClean® System
- ☐ **2664.202 Bathing Pool only, Left-hand
Drain Outlet**
- ☐ **2664.102 Bathing Pool only, Right-hand
Drain Outlet**

Nominal Dimensions:
1524 x 1524 x 502mm
(60" x 60" x 19-3/4")

**Compliance Certifications -
Meets or Exceeds the Following Specifications:**

- Underwriters Laboratories - Hydromassage
Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

American Standard whirlpools and air baths with EverClean® incorporate a safe and effective silver-ion antimicrobial additive right into the circulation piping to protect the pipes from mold, mildew, algae and fungus that could cause deterioration or staining of the pipes.

SEE REVERSE FOR PRODUCT DIMENSIONS
AND SPECIFICATIONS





To Be Specified - Required:

- ☐ Color:
- ☐ Bath Filler: (specify finish)
- ☐ Bath Drain: 1583.470 (specify finish)

To Be Specified - Optional:

- ☐ Jet Trim Ring Kit: 9860.200-two per kit (specify finish)
for Body Massage Jets only

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

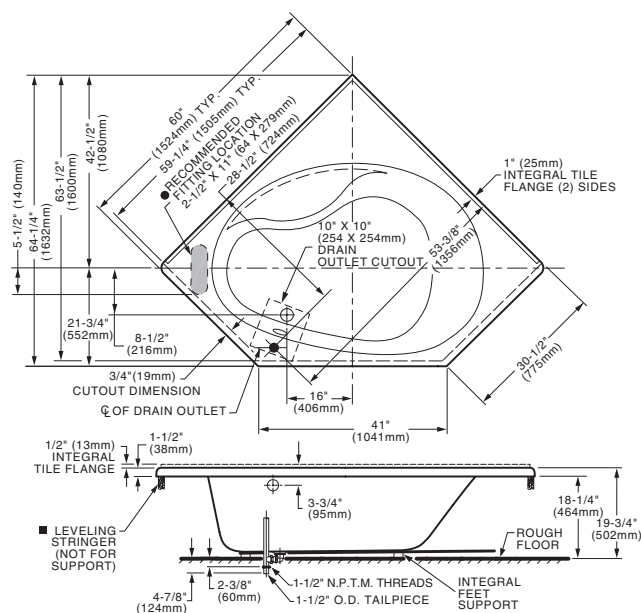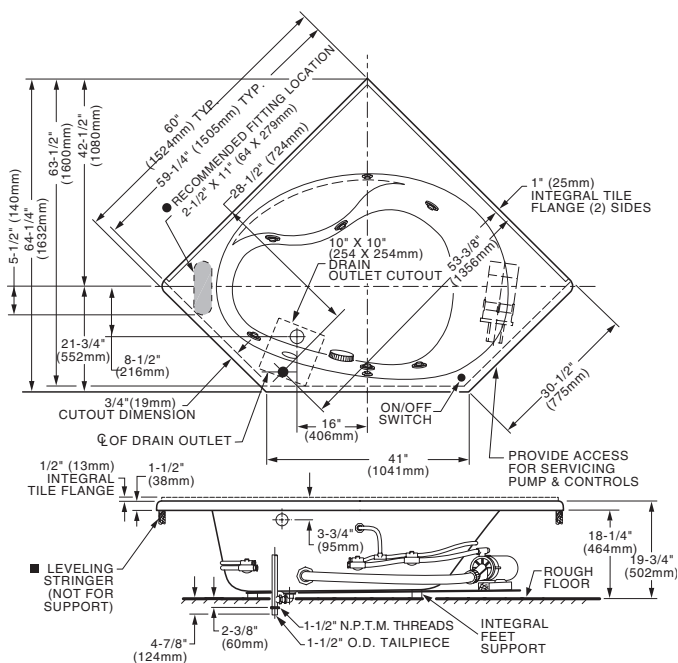

GENERAL SPECIFICATIONS FOR 2664 WHIRLPOOL

INSTALLED SIZE _____ 60 x 60 x 19-3/4 In. (1524 x 1524 x 502mm)
 WEIGHT _____ 114 Lbs. (51 Kg.)
 WEIGHT w/WATER _____ 781 Lbs. (351 Kg.)
 GAL. TO OVERFLOW _____ 80 Gal. (303 L)
 WHIRLPOOL MIN. OPERATING VOL. _____ 58 Gal. (220 L)
 BATHING WELL AT SUMP _____ 42 x 28 In. (1067 x 711mm)
 BATHING WELL AT RIM _____ 60 x 40 In. (1524 x 1016mm)
 WATER DEPTH TO OVERFLOW _____ 14 In. (356mm)
 FLOOR LOADING _____ 37 Lbs./Sq.Ft. (182 Kgs./Sq.m)
 (PROJECTED AREA)
 PTS. _____ 41.7
 CUBE (FT³) _____ 68.5

WHIRLPOOL ELECTRICAL SPECIFICATIONS

SYSTEM I PUMP _____ 1.25 HP, 9.9 AMPS, 120V.

GENERAL SPECIFICATIONS FOR 2664 BATHING POOL

INSTALLED SIZE _____ 60 x 60 x 19-3/4 In. (1524 x 1524 x 502mm)
 WEIGHT _____ 94 Lbs. (42 Kg.)
 WEIGHT w/WATER _____ 761 Lbs. (342 Kg.)
 GAL. TO OVERFLOW _____ 80 Gal. (303 L)
 BATHING WELL AT SUMP _____ 42 x 28 In. (1067 x 711mm)
 BATHING WELL AT RIM _____ 60 x 40 In. (1524 x 1016mm)
 WATER DEPTH TO OVERFLOW _____ 14 In. (356mm)
 FLOOR LOADING _____ 36 Lbs./Sq.Ft. (177 Kgs./Sq.m)
 (PROJECTED AREA)
 PTS. _____ 41.7
 CUBE (FT³) _____ 68.5

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

CONCEALED PIPING NOT INCLUDED.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

● IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING, DRAIN OVERFLOW, AND APRON INSTALLATION. MOUNTING HOLES DRILLED BY INSTALLER.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.