

**ELLISSE OVAL™ PREMIUM COMBO
MASSAGE BATH**

☐ **2709.428WC.K2**

- Acrylic with fiberglass reinforcement
- Pre-leveled tub bottom
- Pre-drilled for Grab Bars (must be purchased separately)
- EverClean® System
- Two speed 2.1 hp pump/motor with pulse feature
- Dual electronic control panels with built-in 20 minute timed safety shut-off
- Six jet multi-directional and flow adjustable jets
- Two silent air volume controls
- Smooth Air™ Massage System with perfectly smooth air jets throughout the tub floor
- Variable speed 1.0 hp air blower with heater
- Programmable automatic purge with timer
- Chromatherapy LED lighting system
- Factory installed in-line Whirlpool heater
- Drain included

Nominal Dimensions:

69-1/4" x 38-1/2" x 19-3/4"
(1759 x 978 x 502mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

American Standard whirlpools and air baths with EverClean® incorporate a safe and effective silver-ion antimicrobial additive right into the circulation piping to protect the pipes from mold, mildew, algae and fungus that could cause deterioration or staining of the pipes.

SEE REVERSE FOR PRODUCT DIMENSIONS
AND SPECIFICATIONS




To Be Specified - Required:

- ☐ Color:
- ☐ Drain included (chrome)
- ☐ Other Bath Faucet (specify finish):
- ☐ Grab Bar Kit: 9827-200 two per kit (specify finish):

To Be Specified - Optional:

- ☐ Apron: (specify color)
- ☐ Tile Bead Kit:
- ☐ Drain Trim Kit: 1585.200 (specify finish)
- ☐ Air Blower Remote Mounting Kit: 754025-0071A

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

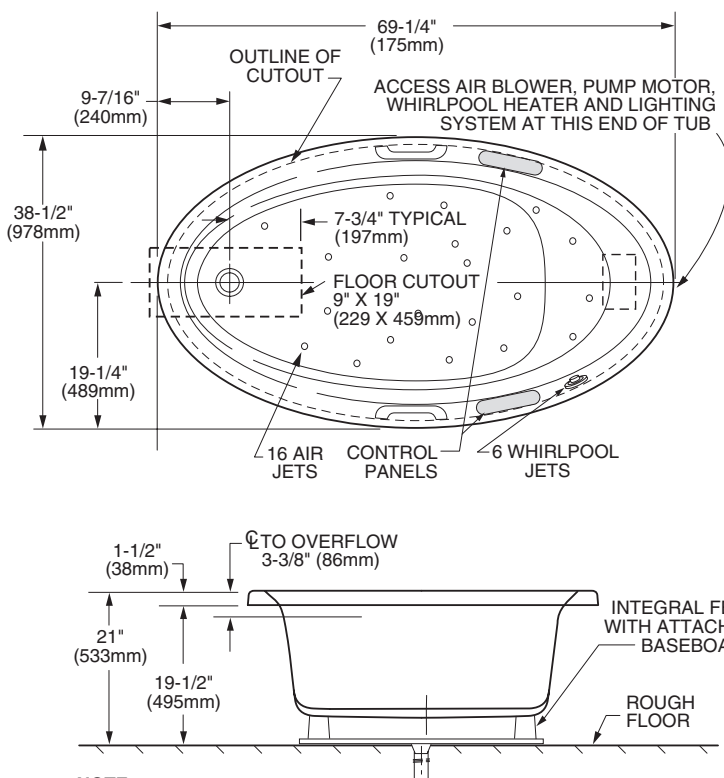

NOTE:
INSTALLER MUST PROVIDE 12" X 24" ACCESS OPENING FOR SERVICING AIR BLOWER, PUMP MOTOR, WHIRLPOOL HEATER, AND LIGHTING SYSTEM.

THIS MODEL INCLUDES A DRAIN ASSEMBLY. OTHER DRAIN ASSEMBLIES CANNOT BE USED. REVIEW DRAIN INSTALLATION DETAILS IN THE DOCUMENT TO FULLY UNDERSTAND FLOOR CUTOUT REQUIREMENTS.

GENERAL SPECIFICATIONS FOR 2709 COMBINATION SYSTEM	
INSTALLED SIZE	69-1/4 x 38-1/2 x 19-3/4 In. (1759 x 978 x 502mm)
WEIGHT	119 Lbs. (54 Kg.)
WEIGHT w/WATER	652 Lbs. (296 Kg.)
GAL. TO OVERFLOW	64 Gal. (243 L)
BATHING WELL AT SUMP	45 x 23 In. (1143 x 584mm)
BATHING WELL AT RIM	63 x 32 In. (1600 x 813mm)
WATER DEPTH TO OVERFLOW	13 In. (330mm)
FLOOR LOADING (PROJECTED AREA)	35 Lbs./Sq. Ft. (172 Kgs./Sq.m)
PTS.	25.6
CUBE (FT ³)	49.4
ELECTRICAL SPECIFICATIONS	

NOTE: See installation instructions for electrical specifications

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND OR PENINSULA TYPE INSTALLATION. SUPPORT OF BATH BY INTEGRAL FEET. NO ADDITIONAL SUPPORT IS REQUIRED. SUPPORT AND ENCLOSING MATERIAL BY OTHERS.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH BATH FOR ADDITIONAL INFORMATION.

▲ CUTOUT TEMPLATE PROVIDED IN SHIPPING BOX. MAY BE REQUESTED SEPARATELY.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1 / CSA Certified. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.