

COASTAL FREESTANDING TUB

☐ **2765.014 COASTAL FREESTANDING TUB**

Product Features:

- Sleek contemporary design
- High-gloss cast acrylic
- Center toe-tap drain
- Large slotted overflow for deep soaking
- Integrated tub drain with Chrome finish
- Limited Lifetime warranty

Nominal Dimensions:

68-3/4" x 31-1/4" x 23-5/8"
(1746 x 794 x 600mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- IAPMO Z124-2011
- CSA B45.5-11
- cUPC



SEE REVERSE SIDE FOR ROUGHING-IN DIMENSIONS
AND PRODUCT SPECIFICATIONS

To Be Specified - Required:


- ☐ Color: White

Optional: For all installations

Recommended: For concrete slab installation

Drain adapter rough in suggest

- ☐ OS&B ABS Island Tub Drain Rough-In #ITD35
- ☐ PVC Island Tub Drain Rough-In #ITD5135
- or
- ☐ Cast Iron Island Tub Drain Rough-In #ID357

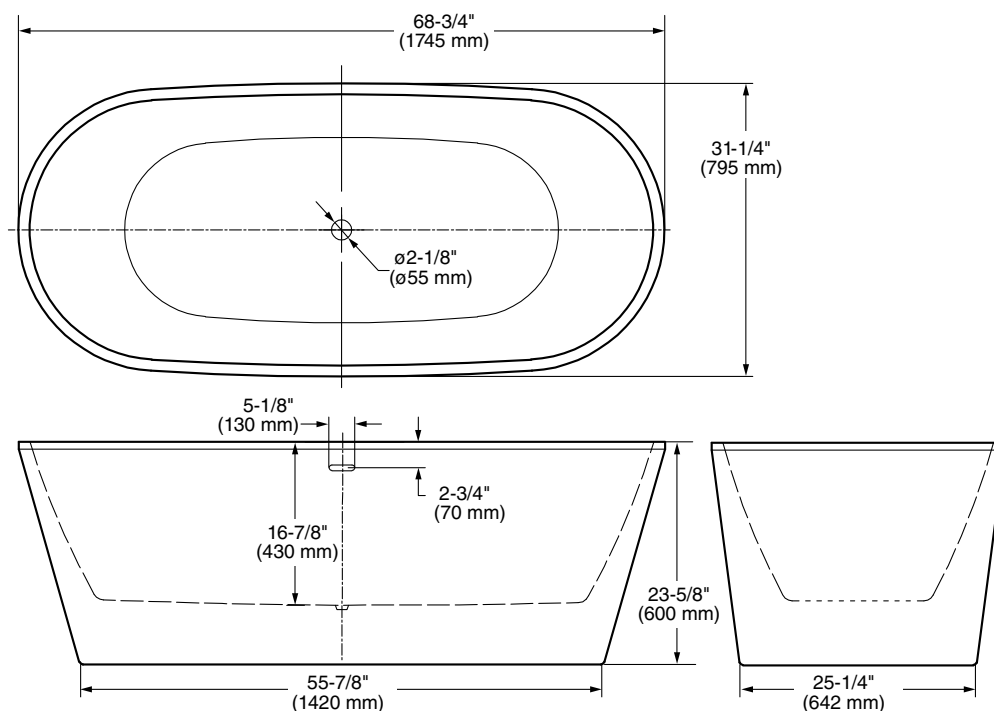

**GENERAL SPECIFICATIONS FOR
2765 FREE STANDING BATH**

INSTALLED SIZE	68-3/4 x 31-1/4 x 23-5/8 in. (1746 x 794 x 600mm)
WEIGHT	97 Lbs. (44 Kg.)
WEIGHT w/WATER	594 Lbs. (270 Kg.)
GAL. TO OVERFLOW	71 Gal. (269 L)
BATHING WELL AT SUMP	46-1/8 x 20-1/8 In. (1172 x 511mm)
BATHING WELL AT RIM	66 x 28-1/2 In. (1677 x 724mm)
WATER DEPTH TO OVERFLOW	14-1/8 In. (359mm)
FLOOR LOADING (PROJECTED AREA)	40 Lbs./Sq.Ft. (195 Kgs./Sq.m)

NOTES:

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH BATHTUB FOR ADDITIONAL INFORMATION.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.