

**KIPLING FREESTANDING TUB**

☐ **2767.014 KIPLING FREESTANDING TUB**

**Product Features:**

- Elegant traditional styling
- High-gloss cast acrylic
- Soaking tub with deep bathing well
- Center toe tap drain
- Large slotted overflow for deep soaking
- Integrated tub drain with Chrome finish
- Limited Lifetime warranty

**Nominal Dimensions:**

69-5/8" x 31-3/4"min. x 23-5/8"  
(1768 x 806 min. x 600mm)

**Compliance Certifications -**

**Meets or Exceeds the Following Specifications:**

- IAPMO Z124-2011
- CSA B45.5-11
- cUPC



SEE REVERSE SIDE FOR ROUGHING-IN DIMENSIONS  
AND PRODUCT SPECIFICATIONS

**To Be Specified - Required:**


- ☐ Color: White

**Optional:** For all installations

**Recommended:** For concrete slab installation

**Drain adapter rough in suggest**

- ☐ OS&B ABS Island Tub Drain Rough-In #ITD35
- ☐ PVC Island Tub Drain Rough-In #ITD5135
- or
- ☐ Cast Iron Island Tub Drain Rough-In #ID357

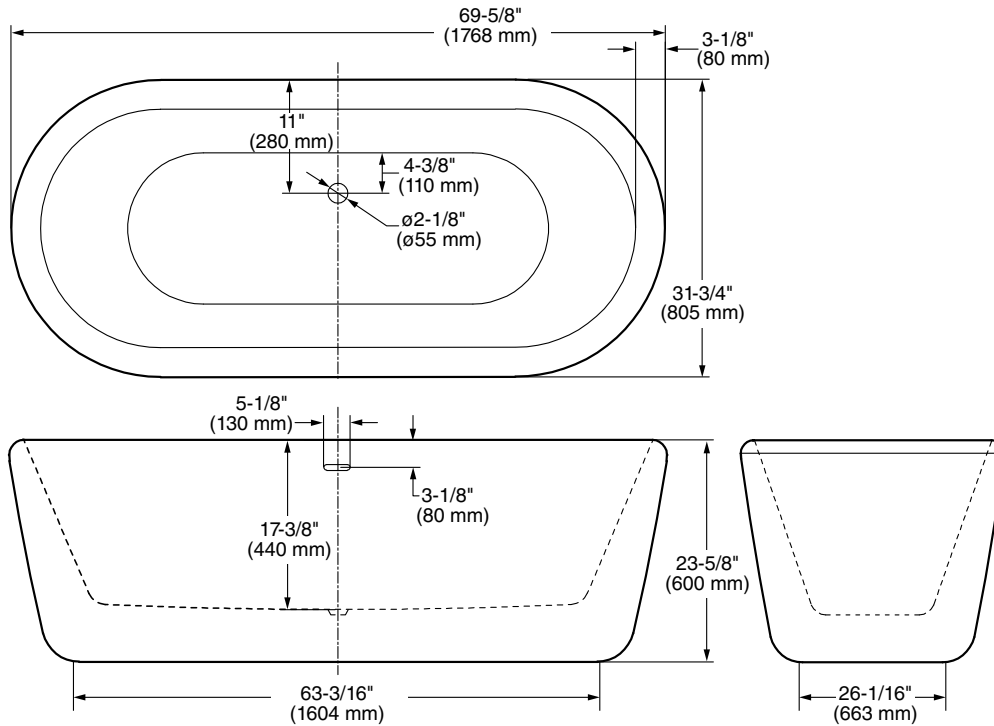

**GENERAL SPECIFICATIONS FOR  
2767 FREE STANDING BATH**

INSTALLED SIZE \_\_\_\_\_ 69-5/8 x 31-3/4 x 23-5/8 in.  
(1768 x 806 x 600mm)

WEIGHT \_\_\_\_\_ 112 Lbs. (51 Kg.)

WEIGHT w/WATER \_\_\_\_\_ 484 Lbs. (220 Kg.)

GAL. TO OVERFLOW \_\_\_\_\_ 58 Gal. (220 L)

BATHING WELL AT SUMP \_\_\_\_\_ 44-7/8 x 16 In. (1140 x 406mm)

BATHING WELL AT RIM \_\_\_\_\_ 63-3/8 x 25-1/2 In. (1610 x 648mm)

WATER DEPTH TO OVERFLOW \_\_\_\_\_ 14-1/4 In. (362mm)

FLOOR LOADING \_\_\_\_\_ 32 Lbs./Sq.Ft. (155 Kgs./Sq.m)  
(PROJECTED AREA)

**NOTES:**

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH BATHTUB FOR ADDITIONAL INFORMATION.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.