

☐ **2742.448WC.K2 EcoSilent™ Combo Bath**

- EcoSilent™ Whirlpool System
- Ultra-quiet, makes 70% less noise
- Ultra-efficient, uses 50% less energy
- Acrylic with fiberglass reinforcement
- Tub-for two with center drain and dual backrests
- Dual, molded-in arm rests
- Dual, integrated faucet/accessory deck areas
- Pre-leveled tub bottom
- EverClean® System
- Single speed pump with electronic on/off
- Eight multi-directional and flow adjustable jets
- Two silent air volume controls
- Air Massage System with perfectly smooth air jets around tub perimeter
- Double intensity lumbar massage
- Programmable automatic purge with timer
- Variable speed, heated blower
- Factory installed power cord with plug
- Deck-mounted electronic control
- Chromatherapy LED lighting system
- Factory installed in-line Whirlpool heater



Nominal Dimensions:

71-1/2" x 41-3/4" x 22"
(1816 x 1060 x 559mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

American Standard whirlpools and air baths with EverClean® incorporate an antimicrobial silver-ion additive right into the circulation piping to protect the pipes from mold, mildew, algae and fungus that could cause deterioration or staining of the pipes.

SEE REVERSE FOR PRODUCT DIMENSIONS
AND SPECIFICATIONS

To Be Specified - Required:

- ☐ Color:
- ☐ Drain 1594.170 (specify finish)
- ☐ Town Square Bath Faucet:
 - ☐ D/M Filler with Personal Shower: 2555.901 (specify finish)
 - ☐ D/M Filler less Personal Shower: 2555.900 (specify finish)
- ☐ Town Square Bath/Shower Faucet:
 - ☐ B/S for Wall Mount Spout: 2555.602 (specify finish)
 - ☐ B/S for Deck Mount Spout: 2555.652 (specify finish)
- ☐ Other Bath Faucet (specify finish):


To Be Specified - Optional:

- ☐ Air Blower Remote Mounting Kit: 754025-0071A
- ☐ Drain Trim Kit 1585.200 (specify finish)

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

TOWN SQUARE® 6' x 42" ECOSILENT™ COMBO MASSAGE BATH

HIGH GLOSS

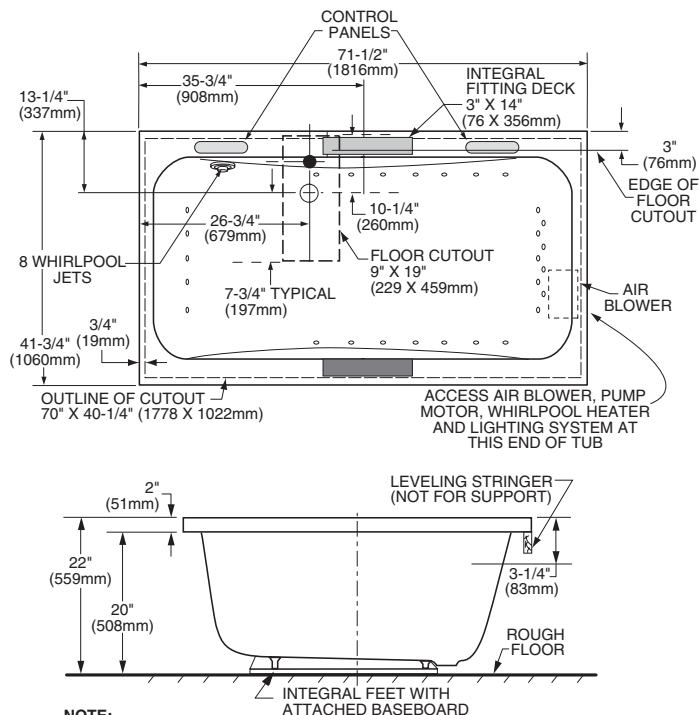

NOTE:
INSTALLER MUST PROVIDE 12" X 24" ACCESS OPENING FOR SERVICING AIR BLOWER, PUMP MOTOR, WHIRLPOOL HEATER, AND LIGHTING SYSTEM.

THIS MODEL INCLUDES A DRAIN ASSEMBLY. OTHER DRAIN ASSEMBLIES CANNOT BE USED. REVIEW DRAIN INSTALLATION DETAILS IN THE DOCUMENT TO FULLY UNDERSTAND FLOOR CUTOUT REQUIREMENTS.

GENERAL SPECIFICATIONS FOR 2742 COMBINATION SYSTEM

INSTALLED SIZE	71-1/2 x 41-3/4 x 22 In. (1816 x 1060 x 559mm)
WEIGHT	174 Lbs. (79 Kg.)
WEIGHT w/WATER	830 Lbs. (313 Kg.)
GAL. TO OVERFLOW	69 Gal. (261 L)
BATHING WELL AT SUMP	41 x 21-1/2 In. (1041 x 546mm)
BATHING WELL AT RIM	62 x 31-1/2 In. (1574 x 800mm)
WATER DEPTH TO OVERFLOW	14-1/4 In. (362mm)
FLOOR LOADING (PROJECTED AREA)	36 Lbs./Sq.Ft. (176 Kgs./Sq.m)
PTS.	27.8
CUBE (FT ³)	55.7

ELECTRICAL SPECIFICATIONS

NOTE: See installation instructions for electrical specifications

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIALS BY OTHERS.

● IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING AND DRAIN OVERFLOW. MOUNTING HOLES DRILLED BY INSTALLER.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH BATH FOR ADDITIONAL INFORMATION.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1 / CSA Certified. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.