

OVATION® BATHTUB
with INTEGRAL APRON

- ☐ **2647.112 OVATION TUB**
Right Hand Outlet
- ☐ **2647.212 OVATION TUB**
Left Hand Outlet

Bathtub Features:

- Space-saving feature - fits in standard bathtub alcove and wider interior provides a more spacious bathing area
- Acrylic with fiberglass reinforcement
- Integral curved apron design
- Recommended for use with Ovation bath walls (specify walls separately)
- Designed to be used with Ovation bath/shower door or curved shower rod
- Integral three-sided, tiling/water retention flange
- Generous back rest
- End drain outlet
- 17" floor to deck tub depth
- High gloss surface finish
- Limited Lifetime warranty

Nominal Dimensions:

60" x 30" x 17"
(1524 x 762 x 432mm)

☐ **3060.BW1 OVATION BATH WALLS**

Wall Set Features:

- 3-piece wall set with tiling flange
- High-gloss polystyrene
- Mounts directly to studs
- One wide shelf at bath height, 4 spacious shelves at showering height

Nominal Dimensions:

60" x 30" x 58"
(1524 x 813 x 1473mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ANSI Z124.1 for Plastic Bathtubs
 - cUPC
- SEE REVERSE FOR ROUGHING-IN DIMENSIONS
AND PRODUCT SPECIFICATIONS



To Be Specified - Required:

- ☐ Color: (Arctic only)
- ☐ Bath Filler*: (specify finish)
- ☐ Drain: 1640.305 (specify finish)


To Be Specified - Optional:

- ☐ Bath Walls: 3060.BW1
- ☐ Ovation Bath/Shower Door:
AM00496400.295 Satin Nickel

For color/finish availability and other faucet choices,
please see the Product Selector and Pricing Guide.



Ovation tub with Ovation wall set and Ovation curved bath door shown.

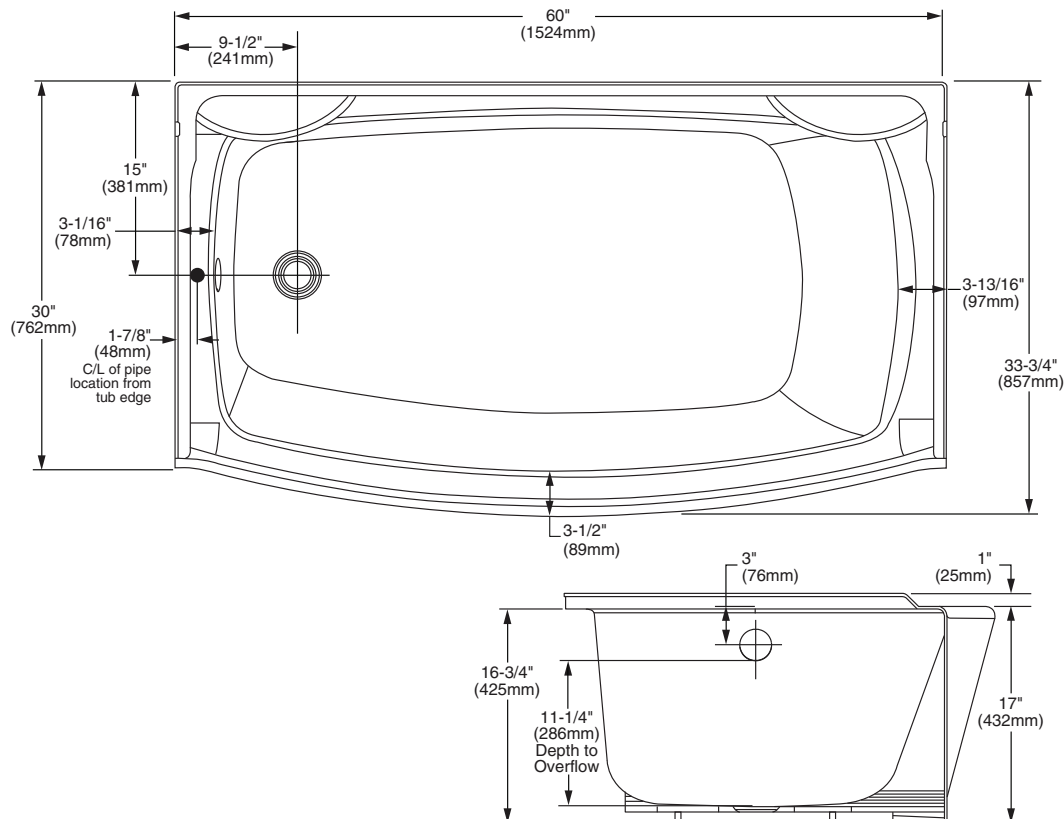

GENERAL SPECIFICATIONS FOR 2647 TUB

INSTALLED SIZE	60 x 30 x 18 In. (1524 x 762 x 457mm)
WEIGHT	60 Lbs. (27 Kg)
WEIGHT w/WATER	435 Lbs. (197 Kg)
GAL. TO OVERFLOW	45 Gal. (170 L)
BATHING WELL AT SUMP	22.25 x 44.25 In. (565 x 1124mm)
BATHING WELL AT RIM	27.75 X 53.125 In. (705 x 1349mm)
WATER DEPTH TO OVERFLOW	11.25 In. (286mm)
FLOOR LOADING	35 Lbs./Sq.Ft. (170 Kgs/Sq.m)
(PROJECTED AREA)	
PTS.	27.5
CUBE (FT ³)	28.4

NOTES:

BATH TO BE INSTALLED ABOVE FLOOR LINE AS A RECESS INSTALLATION.

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH BATHTUB FOR ADDITIONAL INFORMATION.

LEFT HAND OUTLET SHOWN (2647.212), RIGHT HAND REVERSE DIMENSIONS (2647.112)

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124-2011. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.