

**PRINCETON® RECESS BATH WITH LUXURY
LEDGE AND INTEGRAL OVERFLOW**

Americast® brand engineered material

- ☐ **2394.202 ICH** (Chrome Trim) Left Hand Outlet
- ☐ **2394.202 ICHTC** Same as above with Tub Cover
- ☐ **2395.202 ICH** (Chrome Trim) Right Hand Outlet
- ☐ **2395.202 ICHTC** Same as above with Tub Cover
- ☐ **2394.202 IPB** (Polished Brass Trim)
Left Hand Outlet
- ☐ **2394.202 IPBTC** Same as above with Tub Cover
- ☐ **2395.202 IPB** (Polished Brass Trim)
Right Hand Outlet
- ☐ **2395.202 IPBTC** Same as above with Tub Cover
- ☐ **2394.202 IBS** (Brushed Satin Trim)
Left Hand Outlet
- ☐ **2394.202 IBSTC** Same as above with Tub Cover
- ☐ **2395.202 IBS** (Brushed Satin Trim)
Right Hand Outlet
- ☐ **2395.202 IBSTC** Same as above with Tub Cover

- Lift and turn drain stopper assembly included with bath
- Escutcheon included and installed on bath
- Acid resistant porcelain finish
- Recess bath with integral apron and tiling flange
- Integral lumbar support
- Beveled headrest
- Extra wide ledge for placement of toiletries
- Full slip-resistant coverage
- End drain outlet
- Integral base

Nominal Dimensions:

1524 x 864 x 356mm
(60" x 34" x 14")

Bathing Well Dimensions:

1423 x 635 x 337mm
(56" x 25" x 13-1/4")

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.1/CSA B45.2
- ASTM F-462 for Slip-resistant Bathing Facilities
- CSA B45.5/IAPMO Z124 Ignition Test,
Section 5.13



Photograph details integral overflow and drain assembly. Drain assembly included with bath.

To Be Specified:

- ☐ Color:
- ☐ Bath Filler: (specify finish)
- ☐ Bath Drain: (included)

To Be Specified - Optional:

- ☐ Pressure Test Kit†: 791363-0070A


*See faucet section for additional models available

† When system pressure test is required, the pressure test kit is necessary to seal overflow and perform test.

Americast® brand engineered material is a composition of porcelain bonded to enameling grade metal, bonded to a patented structural composite.

**SEE REVERSE FOR PRODUCT DIMENSIONS
AND SPECIFICATIONS**

PRINCETON® RECESS BATH WITH LUXURY LEDGE AND INTEGRAL OVERFLOW

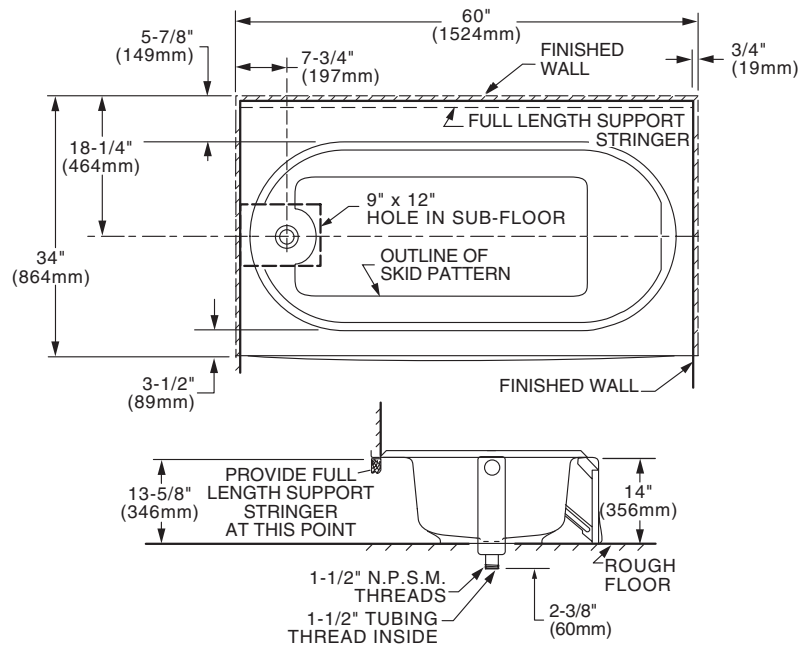

BELOW FLOOR ROUGH
2394.202 INTEGRAL OVERFLOW
2395.202 INTEGRAL OVERFLOW


LEFT HAND TUB ILLUSTRATED
RIGHT TUB IS REVERSED

GENERAL SPECS FOR 2394/2395 ICH, IBS, IPB BATHING POOL


INSTALLED SIZE	60 x 34 x 14 In. (1524 x 864 x 356mm)
WEIGHT	119 Lbs. (54 Kg.)
WEIGHT w/WATER	469 Lbs. (213 Kg.)
GAL. TO OVERFLOW	42 Gal. (159 L)
BATHING WELL AT SUMP	42 x 19 In. (1067 x 483mm)
BATHING WELL AT RIM	56 x 25 In. (1423 x 635mm)
WATER DEPTH TO OVERFLOW	9-1/2 In. (241mm)
FLOOR LOADING	33 Lbs./Sq.Ft. (159 Kgs./Sq.m)
(PROJECTED AREA)	
PTS.	6.7
CUBE (FT ³)	20.3

Below is shown typical cross sections of the tub rim showing typical wall constructions.

WOOD STUDS



STEEL STUDS



51 x 102mm (2 x 4) WOOD
STRINGER FULL LENGTH

NOTES:

LEFT HAND OUTLET SHOWN, RIGHT HAND REVERSE DIMENSIONS.
(2395.202.ICH).

DRAIN AND OVERFLOW ESCUTCHEON INCLUDED WITH BATH.
REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH BATH
FOR DRAIN INSTALLATION

BATH FAUCET NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH FITTING.

CONCEALED PIPING NOT FURNISHED.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH BATH.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME A112.19.1/CSA B45.2
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.