

CADET® 5' x 32" WHIRLPOOL AND BATHING POOL☐ **2770.018W Whirlpool**

- Acrylic with fiberglass reinforcement
- Pre-leveled tub bottom
- Form-fitted back rest
- Molded-in arm rests with elbow supports
- Dual accessory deck area
- Single speed pump/motor
- Factory installed power cord with plug
- Eight multi-directional and flow adjustable Acumax™ body massage jets including two in the lumbar area
- Side-mounted air switch On/Off
- Two silent air volume controls

☐ **2770.018WC EverClean® Whirlpool:**

- Same as 2770.018W except with the EverClean System

☐ **2770.002 Bathing Pool only****Nominal Dimensions:**

1521 x 806 x 502mm
(59-7/8" x 31-3/4" x 19-3/4")

Compliance Certifications -**Meets or Exceeds the Following Specifications:**

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

American Standard whirlpools and air baths with EverClean® incorporate a safe and effective silver-ion antimicrobial additive right into the circulation piping to protect the pipes from mold, mildew, algae and fungus that could cause deterioration or staining of the pipes.

SEE REVERSE FOR PRODUCT DIMENSIONS AND SPECIFICATIONS

**Required Components (Specified finish):**

- ☐ Color:
- ☐ Bath Filler
- ☐ Universal Bath Drain: 1583.470
- ☐ Deep Soak® Bathtub Drain (Bathing Pool only)**: 1640.305



Optional Components:

- ☐ 5 Foot Apron: 9260.018 (specify color)
- ☐ Universal Tile Bead Kit: 751755-100
- ☐ Grab Bar Kit: 9822.200-two per kit (specify finish)

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

**** NOTE:** Deep Soak Bath Drain provides an additional 2" of water depth for a more luxurious bath.

CADET® 5' x 32" WHIRLPOOL AND BATHING POOL HIGH GLOSS

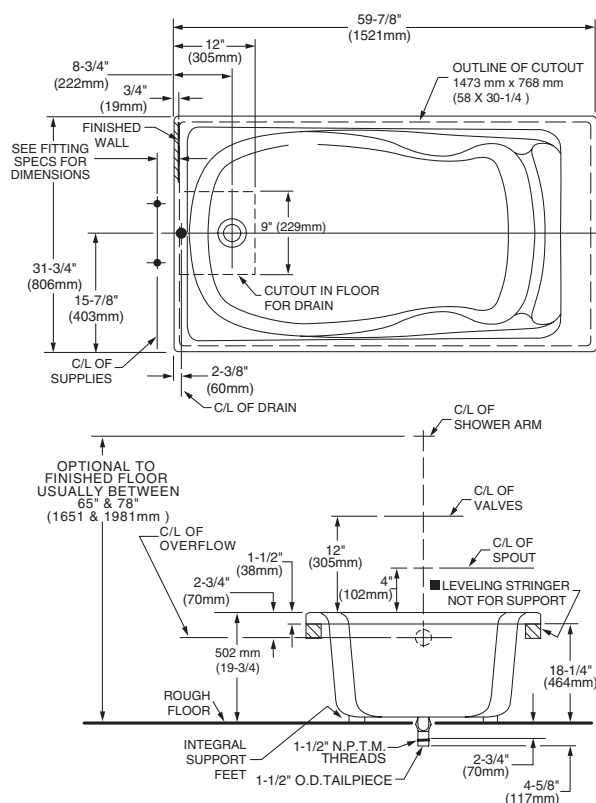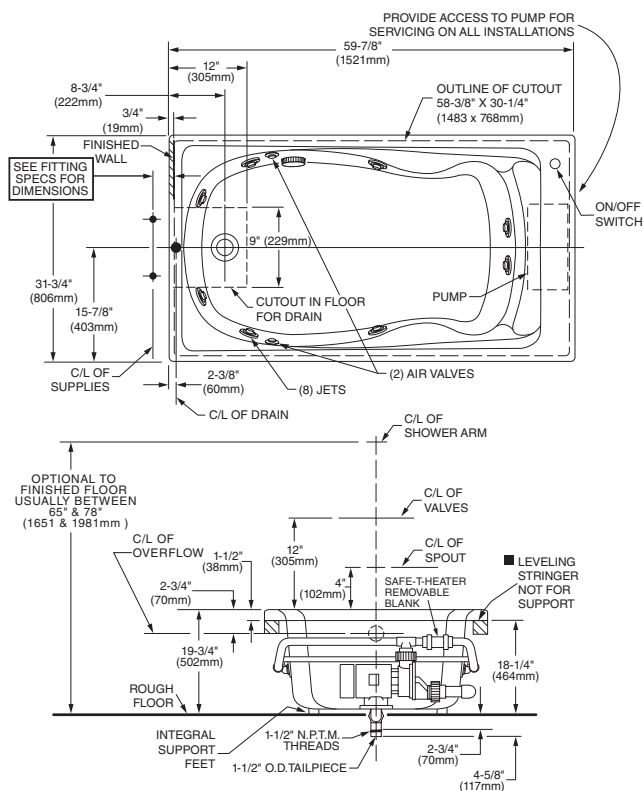

GENERAL SPECIFICATIONS FOR 2770 WHIRLPOOL

INSTALLED SIZE	59-7/8 x 31-3/4 x 19-3/4 In. (1521 x 806 x 502mm)
WEIGHT	85 Lbs. (39 Kg.)
WEIGHT w/WATER	535 Lbs. (243 Kg.)
GAL. TO OVERFLOW	54 Gal. (204 L.)
MIN. OPERATING GAL.	49 Gal. (186 L.)
BATHING WELL AT SUMP	20 x 40 In. (508mm x 1016mm)
BATHING WELL AT RIM	53-1/2 x 26 In. (1359mm x 699mm)
WATER DEPTH TO OVERFLOW	14 In. (356mm)
FLOOR LOADING	41 Lbs./Sq. Ft. (197 Kgs/Sq. m.)
(PROJECTED AREA)	
PTS.	15.6
CUBE (FT ³)	29.6

WHIRLPOOL ELECTRICAL SPECIFICATIONS

PUMP	120V., 60 HZ, 15A GFCI
------	------------------------

GENERAL SPECIFICATIONS FOR 2770 BATHING POOL

INSTALLED SIZE	59-7/8 x 31-3/4 x 19-3/4 In. (1521mm x 806 mm x 502mm)
WEIGHT	62 Lbs. (28 Kg.)
WEIGHT w/WATER	512 Lbs. (233 Kg.)
GAL. TO OVERFLOW	54 Gal. (204 L.)
BATHING WELL AT SUMP	20 x 40 In. (508mm x 1016mm)
BATHING WELL AT RIM	53-1/2 x 26 In. (1359mm x 699mm)
WATER DEPTH TO OVERFLOW	14 In. (356mm)
FLOOR LOADING	39 Lbs./Sq. Ft. (189 Kgs/Sq. m.)
(PROJECTED AREA)	
PTS.	15.6
CUBE (FT ³)	29.6

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIAL BY OTHERS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

OPTIONAL 3 WALL TILING BEAD. KIT AND APRON NO. 9260.018 AVAILABLE AND MUST BE ORDERED SEPARATELY.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.