





- Ceramic disc valves cartridge
- Two-piece adjustable arm folds out of the way when not in use
- Spout extends 22"
- Designed for cold water attachment
- Single hole wall mount and single control actuator
- Lead Free faucet contains ≤0.25% total lead content by weighted volume
- 3.0 gpm (11.4 L/min) flow rate at 45 psi


CODES AND STANDARDS

Meets or Exceeds ASME A112.18.1/ CSA B125.1, NSF 61/Section 9

Certified Compliant with \leq 0.25% Weighted Average Lead Content Regulations

CEC and CALGreen[®] Compliant

Available Finishes Polished Chrome Ultra Steel **Finish Code** 100 355 **DESCRIPTION** Traditional Pot Filler **PRODUCT NUMBER** D35402900.XXX

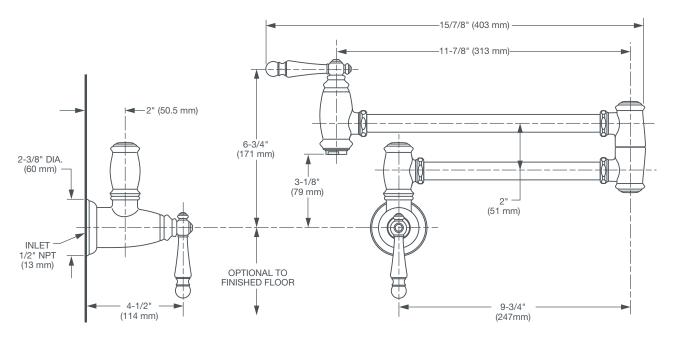

IMPORTANT: These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

PART OF LIXIL

© 2018 AS America Inc.

www.dxv.com

CALGreen[®] is a registered trademark of California Building Standards Commission.