



VICTORIAN

BRIDGE KITCHEN

FAUCET WITH SIDE SPRAY



- Brass construction
- Ceramic disc valve cartridge
- 4 Holes required
- 9-1/2" Swivel spout
- Spout swivels at 360 degrees
- Side spray needs to be mounted minimum 123 mm from the base of cold lever handle
- Lead Free — faucet contains $\leq 0.25\%$ total lead content by weighted volume
- Maximum flow rate: 1.8 gpm (6.8 L/min)

CODES AND STANDARDS

Meets or Exceeds ASME A112.18.1/ CSA B125.1, NSF 61/Section 9

Certified Compliant with $\leq 0.25\%$ Weighted Average Lead Content Regulations

CEC and CALGreen® Compliant

AVAILABLE FINISHES

Polished Chrome
Carbon Bronze
Ultra Steel

FINISH CODE

100
110
355

DESCRIPTION

Bridge Kitchen Faucet

PRODUCT NUMBER

D35402250.XXX

OPTIONAL COMPONENT

Cover Plate

M907587.XXX0A

ROUGH IN DIAGRAM SHOWN
ON NEXT PAGE

PART OF **LIXIL**

©2018 AS America Inc.


5/18

CALGreen® is a registered trademark of California Building Standards Commission.

www.d xv.com



VICTORIAN BRIDGE KITCHEN FAUCET

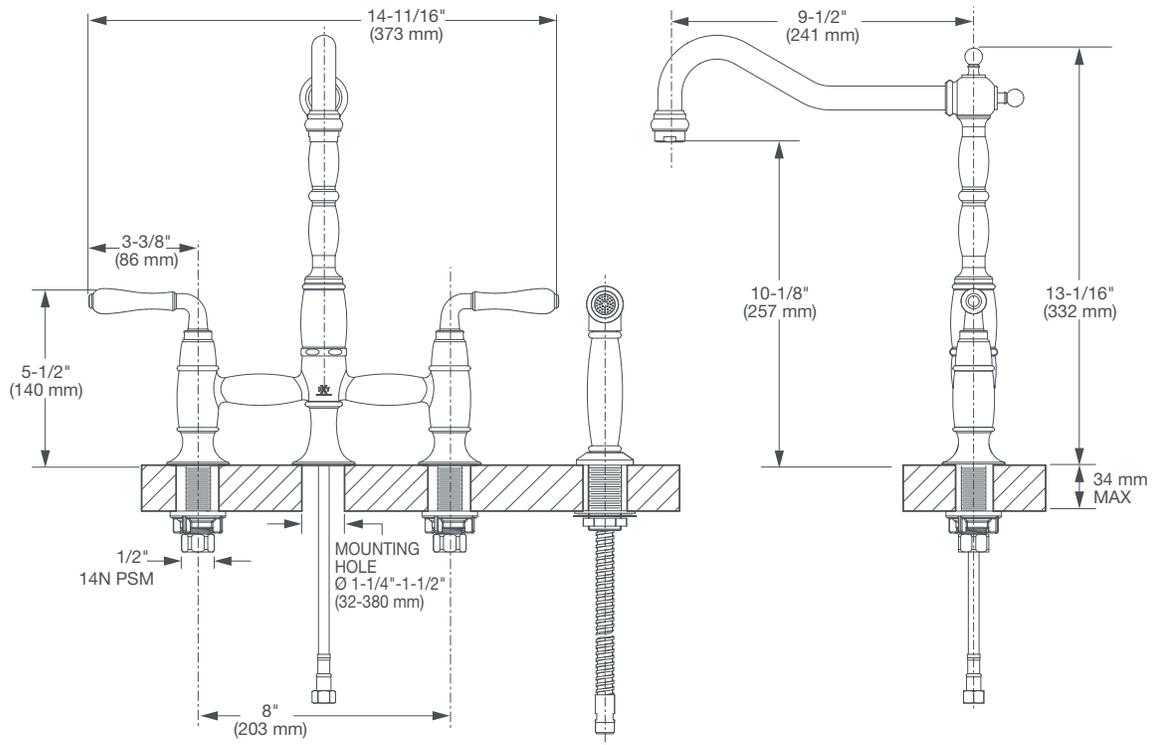

IMPORTANT: These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

PART OF **LIXIL**