

RAPID SL

2" X 4" IN-WALL CARRIER FOR TOILET



ROUGH IN DIAGRAM SHOWN
ON NEXT PAGE

D29012000.000

FEATURES

- Flusing cistern 3"
- 44" installation height
- Element width 24"
- For on-the-wall installations or studded walls
- Powder coated self-supporting steel frame
- For dry-cover (completely pre-assembled)
- With fixed connections
- Quick adjustment, lockable
- Mounting material
- WC mounting screws (2x)
- Mounting kit for ceramic
- Distance of mounting screws (7" - 9")
- Diameter Ø 3" outlet elbow
- Depth adjustable
- Transition (Ø 3")
- Inlet and outlet connecting set
- Flushing cisten 3", 1.6-2.4 gal
- Adjustment from factory (1.6 gal and .8 gal)
- Pneumatic discharge valve offering: 3 modes of operation: dual flush or start/stop or single flush
- Water supply from top
- Insulated against condensation
- Low noise (group I acc. to/German Noise Specification)
- 1/2" angle valve
- With push fit flexible hose union
- No tools required for the installation of the inspection shaft incl. protection during construction phase
- For vertical use
- Without mounting brackets
- Without wall plate/actuation

COLORS/FINISHES

No Finish (000)


COMPLIANCE CERTIFICATIONS

Meets or Exceeds ASME A112.18.1/CSA B125.1.
Energy Policy Act of 1992



RAPID SL

SLIM 2" X 4" IN-WALL CARRIER AND TANK FOR TOILET

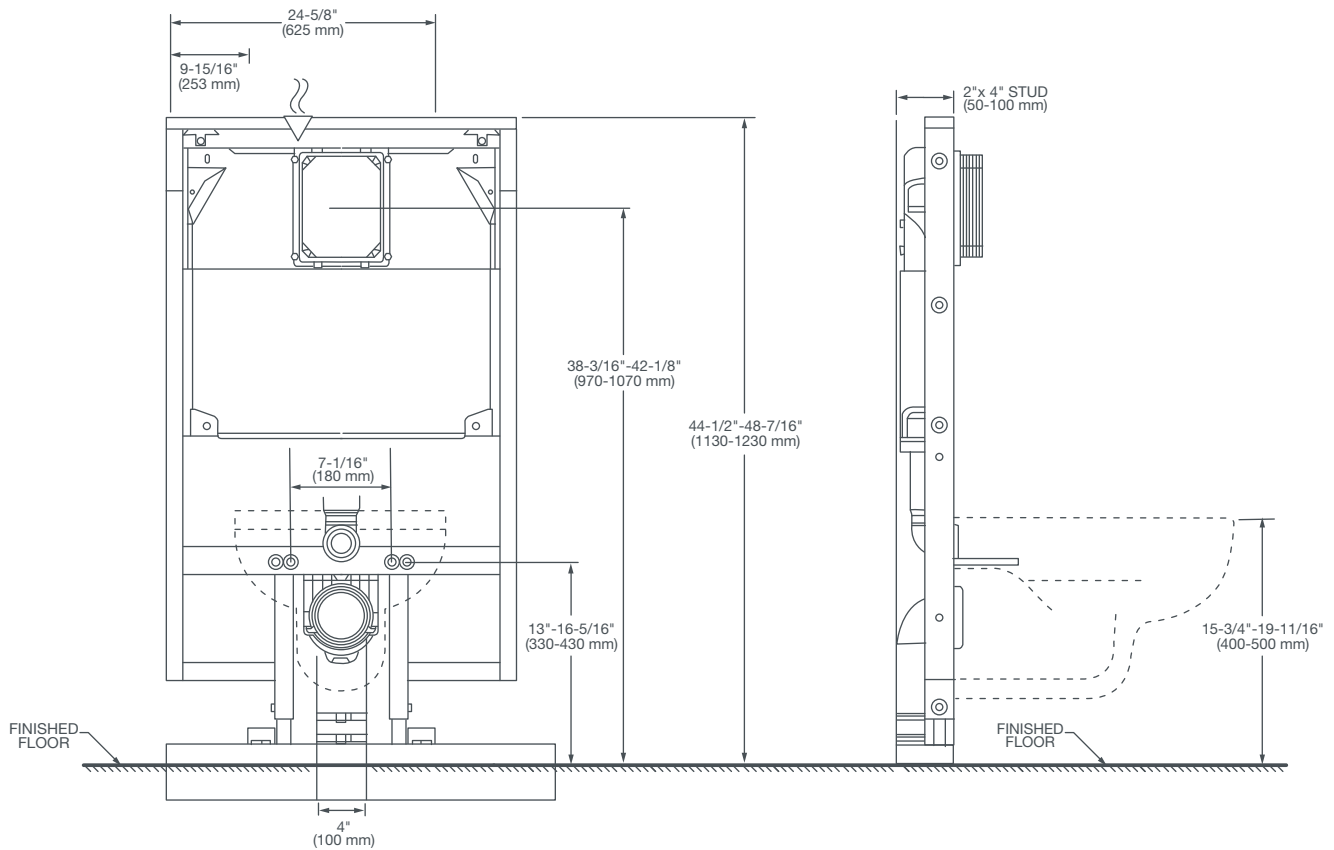

NOTES:

Supply not included with fixture and must be ordered separately.

Dimensions shown for location of supply is suggested.

IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2.

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

PART OF **LIXIL**