

# INSTALLATION INSTRUCTIONS



## Oak Hill™ Lavatory with Deck


Models: D20161008 - 24"  
D20160008 - 30"

Thank you for selecting DXV. To ensure this product is installed properly, please read these instructions carefully before you begin. (Certain installations may require professional help.) Also be sure your installation conforms to local codes.

**⚠ CAUTION: PRODUCT IS FRAGILE. TO AVOID BREAKAGE AND POSSIBLE INJURY HANDLE WITH CARE!**  
*NOTE: Pictures may not exactly define contour of china and components.*

### RECOMMENDED TOOLS AND MATERIALS

Most of the procedures require the use of common tools and materials, which are available from hardware and plumbing, supply stores. It is essential that the tools and materials be on hand before work is begun.

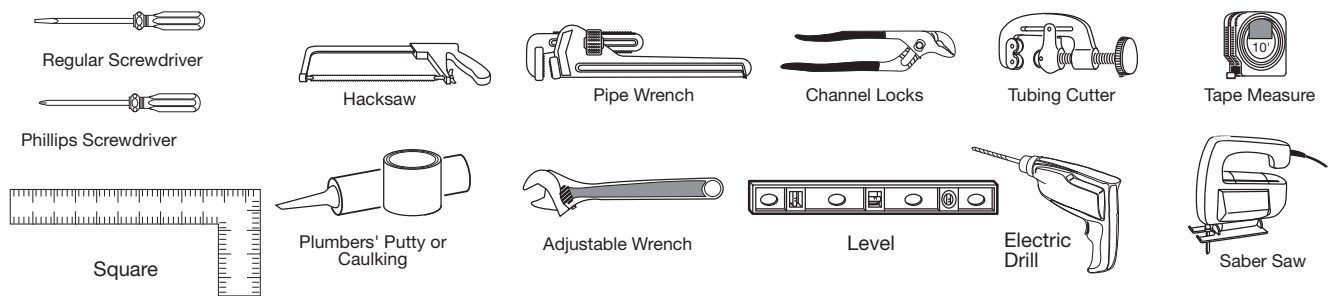


### REPLACEMENT USE

When replacing an original unit be sure to shut off water supply before removing the unit or disconnecting water supply lines and drain fittings. Original supply lines and shutoff valves should be replaced and used with fittings and adapters to match the hookups on the replacement unit.

**⚠ USE TEFLON SEALANT TAPE ON PIPE THREADS FOR WATERTIGHT CONNECTIONS!**

### ROUGHING-IN DIMENSIONS:


- For reference
- OAK HILL 30" CONSOLE D21411030 WITH 30" OAK HILL LAVATORY D20160008**

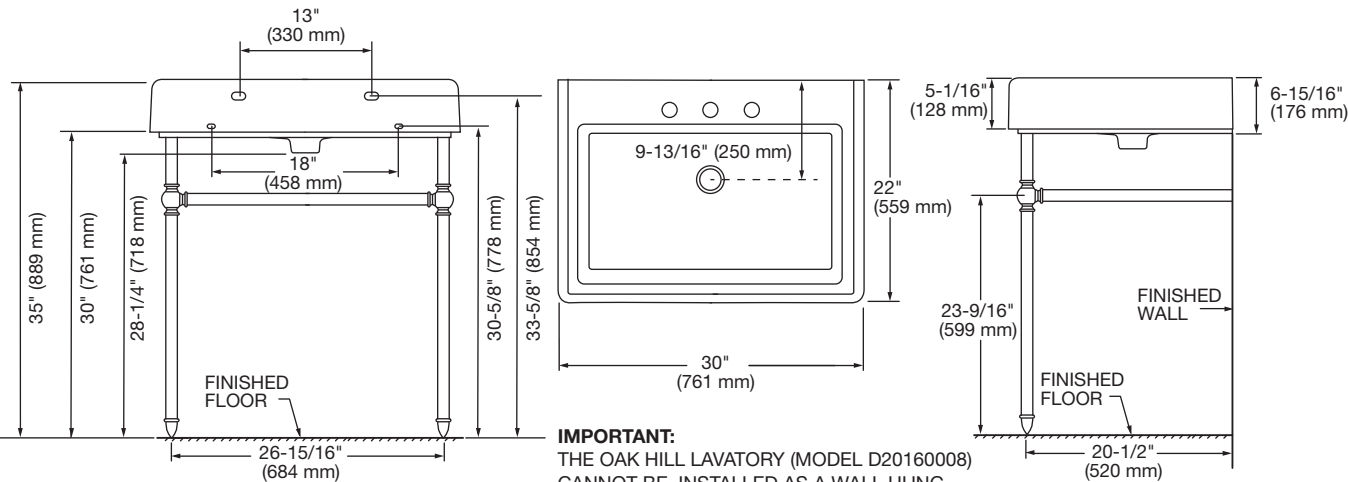


**IMPORTANT:**  
THE OAK HILL LAVATORY (MODEL D20160008) CANNOT BE INSTALLED AS A WALL HUNG LAVATORY. THE LAVATORY MUST BE INSTALLED USING THE OAK HILL CONSOLE STAND, VANITY OR COUNTERTOP.

SAVE FOR FUTURE USE

- For reference



**IMPORTANT:**  
THE OAK HILL LAVATORY (MODEL D20161008)  
CANNOT BE INSTALLED AS A WALL HUNG  
LAVATORY. THE LAVATORY MUST BE  
INSTALLED USING THE OAK HILL CONSOLE  
STAND, VANITY OR COUNTERTOP.

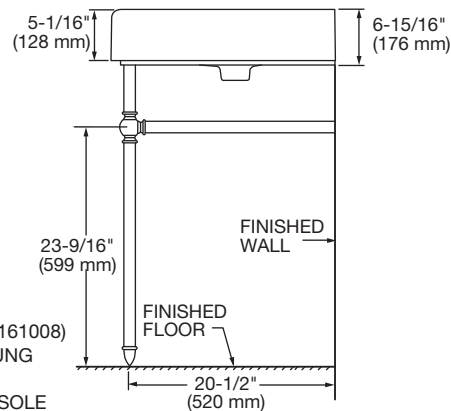


- For reference

Diagram showing the front elevation of the cabinet with dimensions:

- Overall width: 330 mm (13")
- Overall height: 908 mm (35-1/2")
- Top panel height: 34" (864 mm)
- Distance between top panel and main body: 6-7/16" (164 mm)
- Distance between main body and base: 13-15/16" (355 mm)
- Base width: 30" (762 mm)
- Label: "FINISHED FLOOR" with an arrow pointing to the base.
- Label: "FRONT VIEW" on the left side.

CUT OUT FOR DRAIN  
AND SUPPLY LINES

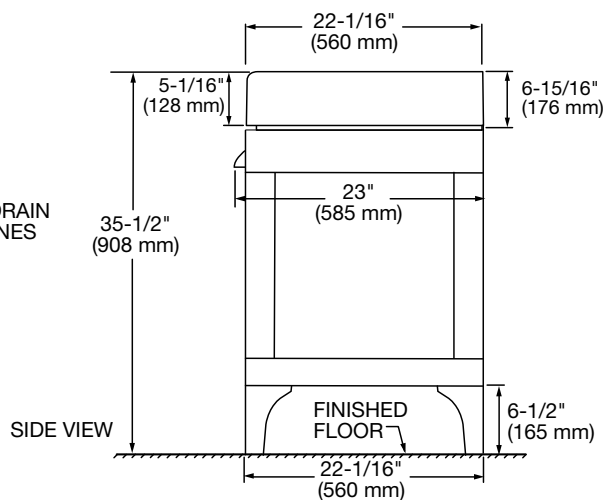


**Lavatory Mounting Provisions** - Whether the lavatory is used for replacement or new installation, the wall area behind the lavatory basin mounting holes must be reinforced to provide secure mounting for the new unit.

**Optional:** For non-masonry installation, crosspieces must be installed to reinforce the lavatory mounting surface to provide adequate support, install as described below. **Figure A.**

1. Remove wallboard/covering from designated area.
2. Toenail 2" x 6" (51 mm x 152 mm) cross piece between studs (or notch studs to accept a 1" x 6" (25 mm x 152 mm) crosspiece, and attach securely). Place the lavatory into desired position and check height of mounting holes for dimensional location of horizontal crosspiece.
3. Replace wallboard/finished wall media.

## INSTALLING CROSS-PIECE

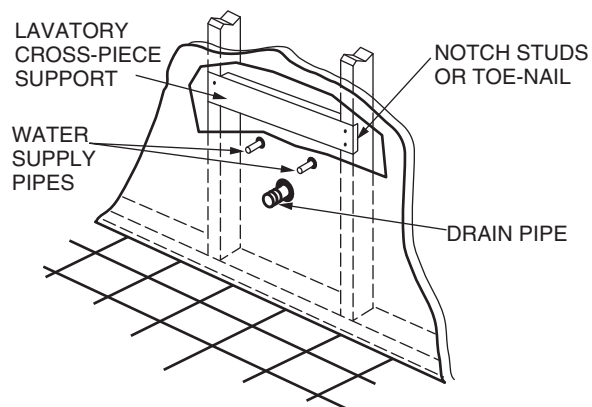


## 2 INSTALLING LAVATORY

**CAUTION: Lavatories are extremely heavy. For personal safety, always use extra person for installation.**


1. Using level, draw a vertical line starting at the waste water return hole. Draw a horizontal line at the required dimension from floor. Check the dimension placing the lavatory and vanity/console legs into position. Mark and drill holes through the mounting holes along the horizontal line. Install lavatory anchor screws leaving 1-7/8" (48 mm) threaded end exposed as illustrated.

2. Apply a bead of caulking to the back of the lavatory. See Diagram.


Bead of Caulking

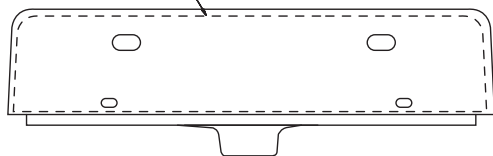

Geometry shown is for illustration only and may not match product geometry.

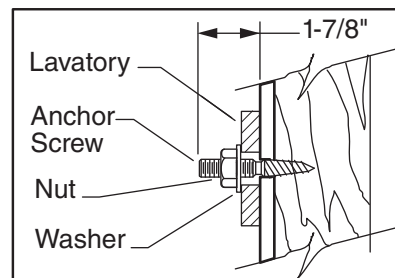

3. Pre-assemble P-trap drain connections in accordance with manufacturer's instructions. Connect supply lines to shutoff valves and loosely install drain connections.

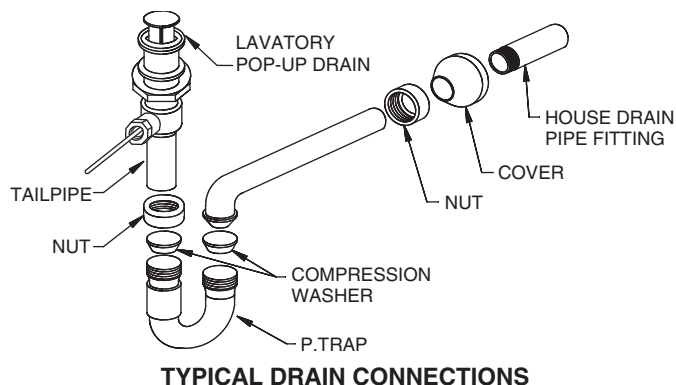

4. Loosely attach the lavatory to the wall at the anchor locations, while supported by vanity or console legs.

**NOTE:** The lavatory must be installed using the Oak Hill console stand, vanity or countertop. Please read the console/vanity instructions before installation.

## INSTALLATION PROCEDURES

Typical installation includes installation of faucet, connection of flexible water supply lines, attachment of basin to countertop, sizing and installation of drain to house water system.

### NOTE:

THIS LAVATORY CAN NOT BE INSTALLED AS A WALL HUNG LAVATORY. THE LAVATORY MUST BE INSTALLED USING THE OAK HILL CONSOLE STAND, VANITY OR COUNTERTOP ONLY.

#### In the United States:

DXV  
One Centennial Avenue  
Piscataway, New Jersey 08855  
Attention: Director of Customer Care

For residents of the United States, warranty information may also be obtained by calling the following toll free number: (800) 227-2734  
[www.DXV.com](http://www.DXV.com)

#### In Canada:

DXV  
5900 Avebury Road  
Mississauga, Ontario  
L5R 3M3  
Canada

Toll Free: 1-800-387-0369  
Local: 905-306-1093  
Fax: 1-800-395-1498  
[www.DXV.ca](http://www.DXV.ca)

#### In Mexico:

DXV  
Via Morelos 330  
Col. Santa Clara Coatitla  
Ecatepec, Estado de México 55540

Toll Free: 01-800-8391200  
[www.DXV.mx](http://www.DXV.mx)