

24 158

GROHTHERM® CUBE

DUAL FUNCTION 2-HANDLE THERMOSTATIC VALVE TRIM WITH CONTROL MODULE

Pure Freude
an Wasser



STANDARD SPECIFICATION:

- GROHE StarLight®
- GROHE TurboStat® compact cartridge with wax thermoelement
- Thermostatic temperature control with GROHE SafeStop safety button at 100°F/38°C
- GROHE SafeStop Plus temperature limiter at 115° F/46° C
- 6 1/4" Metal wall trim plate with GROHE QuickFix® (concealed mounting screws)
- Metal trim angle adjustable up to 6°
- GROHE AquaDimmer (top handle) includes integrated shut off & 2-way diverter (2 discrete functions)
- Metal cube handles
- Includes service stops
- 7.1gpm at 45psi
- Optional AquaDimmer stop ring for shared function (14 060 000) (sold separately)
- Requires GROHE Rapido® SmartBox (35 601 000) (sold separately)



PRODUCT FEATURES:



-  GROHE StarLight®
-  GROHE QuickFix®
-  GROHE TurboStat®

CERTIFICATIONS:



- CEC Certified
- CALGreen Compliant
- Massachusetts Plumbing Board Approved
- N/A
- ASSE 1016
- CSA B125.1
- CSA B125.16
- ASME A112.18.1
- ASME A112.1016
- Complies with lead plumbing laws

AVAILABLE FINISHES:

- 24158000**  GROHE StarLight® Chrome
- 24158EN0**  Brushed Nickel InfinityFinish™

NOTE: Install this product according to the installation guide. ADA, CSA compliant when installed to the specific requirements of these regulations.

We reserve the right to make revisions without notice to product specifications. 08-01-2023

US
Tel: 1.630.582.7711 Fax: 1.630.582.7722
For the most current Specification Sheet,
go to www.grohe.us.

Canada
Tel: 1.888.644.7643 Fax: 1.905.366.2071
For the most current Specification Sheet,
go to www.grohe.ca.


PART OF **LIXIL**

GROHTHERM CUBE
Dual Function 2-Handle
Thermostatic Trim

MODEL # 24158EN0

Pure Freude
an Wasser

GROHE

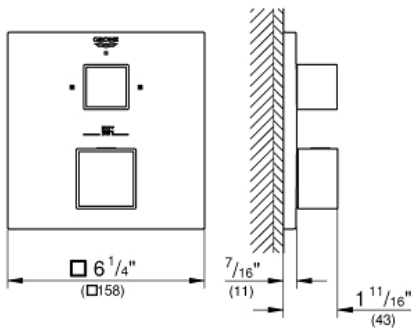

Product Description:

GROHTHERM CUBE

Dual Function 2-Handle Thermostatic Trim

Standard Specification:

- Final installation set for:
- Required rough-in-set sold separately (GROHE Rapido SmartBox 35 601 000)
- **GROHE TurboStat** Compact cartridge with wax thermoelement
- **GROHE StarLight** finish
- Wall trim plate with GROHE QuickFix (Concealing mounting screws)
- Metal trim angle adjustable up to 6°
- Thermostatic temperature control with SafeStop at 100° F/38°C
- GROHE SafeStop Plus temperature limiter at 115° F/46° C
- GROHE AquaDimmer, integrated shut off/diverter valve
- Requires Rough-In Set (29 038 001) (sold separately)
- Optional Aquadimmer stop ring for shared function (14 060 000)

Applicable Codes & Standards:

- ASME A112.18.1/CSA B125.1
- LOGO CEC

Color:

- 24158EN0 Brushed Nickel InfinityFinish

24 158

GROHTHERM® CUBE

DUAL FUNCTION 2-HANDLE
THERMOSTATIC VALVE TRIM WITH
CONTROL MODULE

*Pure Freude
an Wasser*



TECHNICAL DATA:

Product Height	6-1/4 in
Product Length	1-11/16 in
Product Width	6-1/4 in

