

Reliant® Chair Height Elongated Complete Toilet

ADA BARRIER FREE

/ITREOUS CHINA

Reliant® Chair Height Elongated Complete Toilet

□ 773AA101

- Optimal flush Reliant toilet from American Standard
- Vitreous china made High Efficiency Toilet (HET), ultra-low consumption (1.28 gpf/4.8Lpf), utilizes 20% less water and meets EPA WaterSense® Criteria
- Elongated siphon action bowl with direct-fed jet
- Generous 9" x 8" water surface area with PowerWash® rim that scrubs the bowl with each flush
- Fully glazed 2" trapway with 2" flapper flush valve
- 12" rough-in toilet with 16-1/2" rim chair height bowl for accessible applications
- Chrome finish trip lever is supplied (other finishes available as special order)
- Includes sturdy, color-matched slow-close seat, floor bolts, wax ring, and color match bowl caps kit
- Industry-leading lifetime warranty on chinaware, 2 year warranty on all mechanical parts, and 1 year warranty on seat




29-3/4" x 18" x 29-7/8" (756 x 457 x 759 mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2/CSA B45.1 for Vitreous China Fixtures
- US EPA WaterSense® Specification for HETs



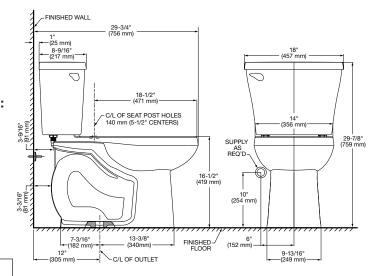

To Be Specified:

- ☐ Color: ☐ White
- Supply with stop:

NOTES:

THIS COMBINATION IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.

* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2

These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ICC ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES.





WATERSENSE* EFFICIENT
CERTIFIED

0.0000.40.4