



**Encompass™ Concealed Trapway Chair Height Elongated
Complete Toilet W/Aquaguard® Insulated Tank**

716AA051

- Includes Aquaguard® liner to help prevent tank condensation
- Great flush performance with an oversized 3" (76mm) flush valve and 1,000 gram (2.2 lb.) solid waste removal **MaP score
- Elongated siphon action bowl with smooth-sided, concealed base
- Includes EverClean® surface which inhibits the growth of stain and odor causing bacteria, mold, and mildew on the surface
- PowerWash® Rinse powerfully rinses the bowl with pressurized water with each flush
- Vitreous china
- Low-consumption (6.0 Lpf/1.6 gpf)
- 12" (305mm) rough-in
- 16-1/2" (419mm) rim height for accessible applications
- 2-1/8" (54mm) fully glazed trapway
- Generous 9" x 8" (229 x 203mm) water surface area prevents debris from sticking to the bowl
- Easy installation - Everything needed for toilet installation is included and can be hand tightened
- Includes a plastic, color-matched, slow-close toilet seat
- 2 color-matched bolt hole covers
- 100% factory flush tested
- Lifetime warranty on chinaware, 5 year warranty on all mechanical parts, and 1 year warranty on seat

Nominal Dimensions:

30-1/4" x 17-7/8" x 30-7/8"
(768 x 454 x 785mm)

Fixture, toilet seat, wax ring, and bowl bolts only.
Water supply line not included.

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2/CSA B45.1 for Vitreous China Fixtures

** Maximum Performance (MaP) testing performed by IAPMO R&T Lab. MaP Report conducted by Gauley Associates Ltd. and Koeller and Company.



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES
AND ICC ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND
USABLE BUILDING FACILITIES-CHECK LOCAL CODES.




SEE REVERSE FOR ADDITIONAL ROUGHING-IN
DIMENSIONS

To Be Specified:

- ☐ Color: ☐ White
- ☐ Supply with stop:



EVERCLEAN®

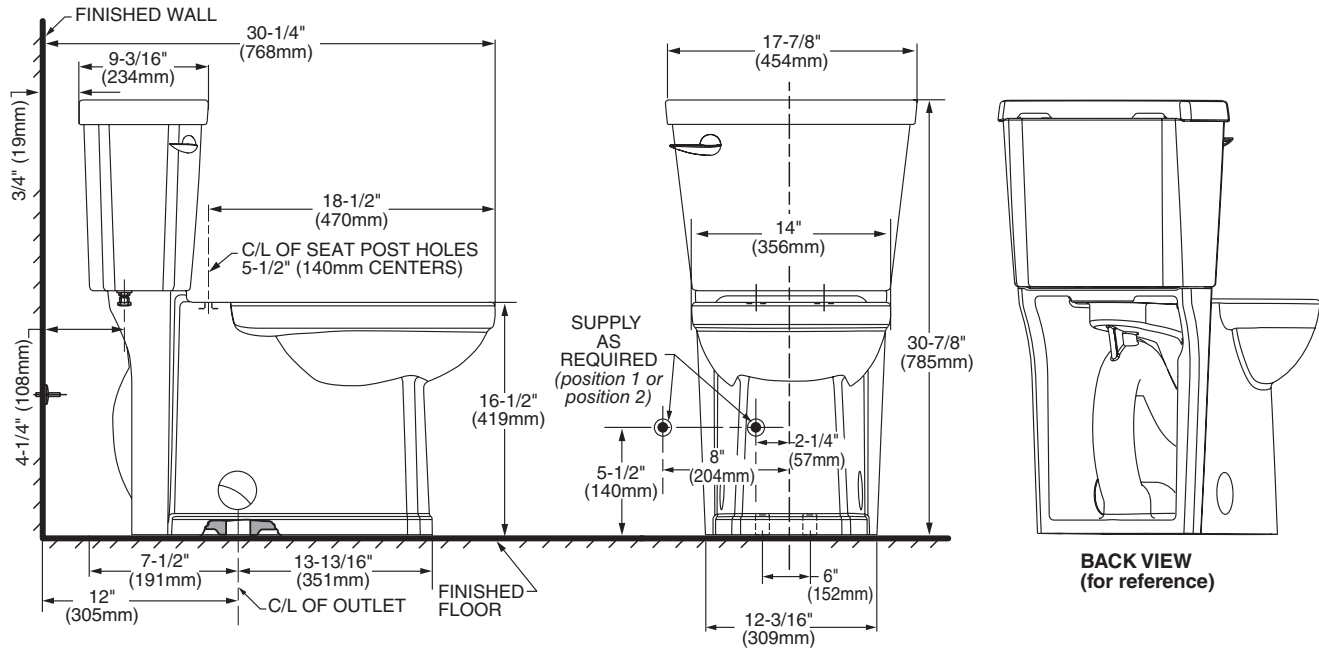

IMPORTANT: Water supply on the wall is required at 2-1/4" or 8" from centerline of the toilet (see rough-in). First suggested position is hidden behind the toilet. The geometry of the toilet gives space for this installation. The second suggested position is next to the toilet. Between these two positions, the space for the supply between wall and toilet is limited to 4-1/2". In this case, check your supply and hose dimensions.

NOTES:

THIS COMBINATION IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 12" (305MM) FROM FINISHED WALL TO C/L OF OUTLET.

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLY ARE SUGGESTED. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.