


SERIN[®] SINGLE CONTROL VESSEL FAUCET



MODEL NUMBER:

- **2064.152 Serin Single Control Monoblock** Grid Drain.
- **2064.151 Serin Single Control Monoblock** Less Drain.

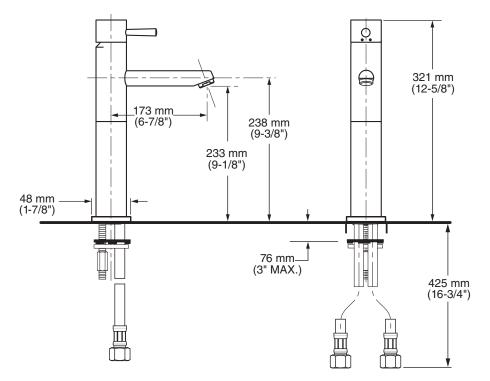

GENERAL DESCRIPTION:

Brass body. Washerless 35 mm ceramic disc valve cartridge with integral hot limit safety stop. Braided flexible supply hoses with 3/8" compression connectors. 1.2 gpm/4.5 L/min. maximum flow rate.

PRODUCT FEATURES:

Brass Construction: Durable. Easy to clean. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridge: Assures a lifetime of smooth handle operation and drip-free performance.

Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

Lead Free: Faucet contains $\leq 0.25\%$ total lead content by weighted average.

SUGGESTED SPECIFICATION

Single control lavatory faucet shall feature a brass body and metal lever handle. Fitting shall be equipped with flexible supplies with 3/8" compression connectors. Shall also feature washerless ceramic disc valve cartridge with an integral hot limit safety stop. Fitting shall be American Standard Model # 2064_.




SERIN[®] SINGLE CONTROL VESSEL FAUCET

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1 CSA B125.1 NSF 61/Section 9 and Annex G



		Finish Options	
Dreduct		Polished Chrome	PVD Brushed Nickel
Product Number	Description	002	295
2064.152	Serin Single Control Monoblock faucet with grid drain.		
2064.151	Serin Single Control Monoblock faucet lessdrain.		

Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.

AERATOR MODIFICATIONS***	Parts Suffix**	
0.5 gpm (1.9 Lpm) PCA* Spray	F05	
0.5 gpm (1.9 Lpm) Vandal Resistant PCA Spray	V05	
1.0 gpm (3.8 Lpm) PCA Aerator	F10	
1.0 gpm (3.8 Lpm) Vandal Resistant PCA Aerator	V10	
1.5 gpm (5.7 Lpm) Vandal Resistant PCA Aerator	V15	

*PCA — Pressure Compenbrushedg

**To modify a product, add suffix after the 4th digit (ex. 2064F05101.002)

***Modified product models are NOT WaterSense certified.