


4175.201 Shown

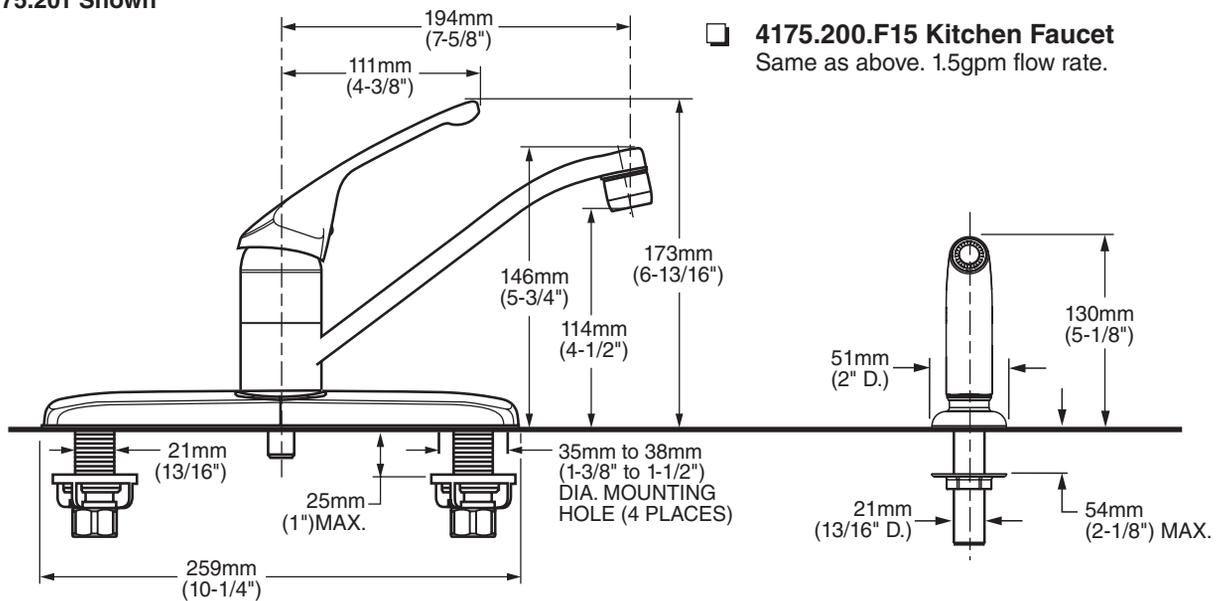

GENERAL DESCRIPTION:

Brass 7-5/8" (194mm) swivel spout. Metal lever handle. Washerless 40mm ceramic disc valve cartridge. Cast brass waterway with 1/2" male inlet shanks. Metal escutcheon plate (escutcheon size 10-1/4"L x 2-3/8"W). 2.2gpm/8.3L/min. maximum flow rate, 1.5gpm/5.7 L/min. maximum flow rate for F15 models.

PRODUCT FEATURES:

Ceramic Disc Valve Cartridge: Assures a lifetime of drip-free performance.

Cast Brass Waterways with "City Shanks": Strong and durable. Integral tabs on casting provide a wobble-free installation.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

Memory Position Valving: Allows user to turn valve on and off at preferred temperature setting without readjusting handle position each time.

Large "Comfort Zone": Allows easy fine tuning of temperature.

Simple Installation: Fast and easy one person installation. Faucet drops in from top. Quick spin nuts secure faucet in place.


SUGGESTED SPECIFICATION:

Single control kitchen faucet shall feature cast brass waterway. Shall also feature washerless 40mm ceramic disc valve cartridge. Faucet shall be American Standard Model # 4175.____.____.


CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ANSI A117.1**
- ASME A112.18.1**
- CSA B125**
- NSF 61/Section 9 & Annex G**

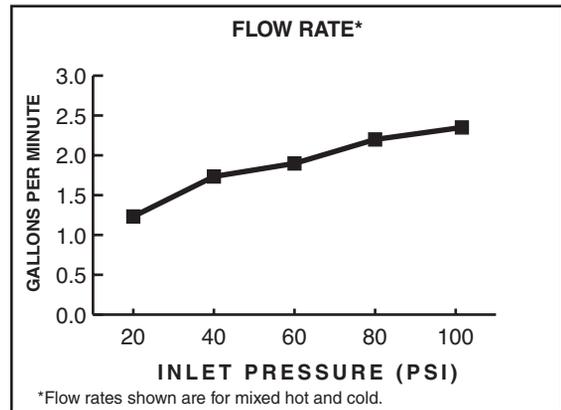

2.2gpm/8.3L/min. FLOW RATE

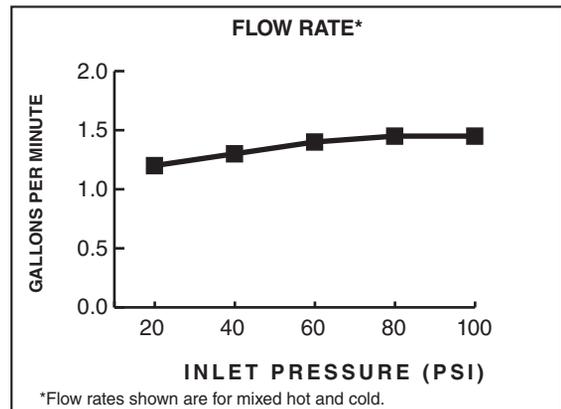

1.5gpm/5.7 L/min. FLOW RATE

Product Number	Description	Finish
		Polished Chrome 002
4175.201	Kitchen Faucet. Separate Color-Matched Handspray.	
4175.201.F15	Same as above. 1.5gpm flow rate.	
4175.203	Kitchen Faucet. Color-Matched Handspray through escutcheon.	
4175.203.F15	Same as above. 1.5gpm flow rate.	
4175.200	Kitchen Faucet. Less Handspray.	
4175.200.F15	Same as above. 1.5gpm flow rate.	

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.