


CERAMIX® SINGLE CONTROL BIDET FITTING

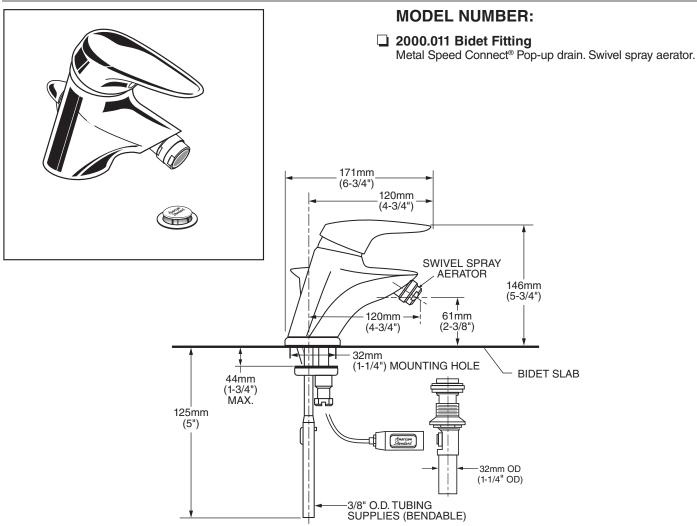

GENERAL DESCRIPTION:

Cast brass body with metal lever handle. Washerless 47mm ceramic disc valve cartridge. Equipped with a hot limit safety stop. 3/8" O.D. copper supplies. 20 inch (500mm) long flexible stainless steel drain cable is pre-assembled to faucet body. Metal Speed Connect® drain body with 1-1/4" (32mm) tail piece.

PRODUCT FEATURES:

Brass and Copper Waterway: Highest quality faucet materials for durability and long life.

Ceramic Disc Valve Cartridge: Assures a lifetime of drip-free performance.

Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

Exclusive Speed Connect® Metal Drain:

- Fewer parts. Installs in less time.
- No adjustments required seals the first time, every time.
- Flexible stainless steel cable installs effortlessly in tight spaces.

Finish: Available in Polished Chrome.

SUGGESTED SPECIFICATION:

Single control bidet fitting shall feature a cast brass body with metal handle. Shall also feature washerless ceramic disc valve cartridge. Fitting shall be equipped with a hot limit safety stop. Shall also feature a metal drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 2000.011.____.

© 2013 AS America, Inc.



CERAMIX® SINGLE CONTROL BIDET FITTING

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1 CSA B125

			Finish
	Product		Polished Chrome
	Number	Description	002
E	2000.011	Bidet fitting. Metal Speed Connect® pop-up drain. Swivel spray aerator.	
	2000.101P	Escutcheon Plate only.	

Ė

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.