

**AXIS™ 36" CURVED SHOWER  
BASE AND DRAIN**

❑ **3636A-ST3 CURVED SHOWER BASE**

**Product Features:**

- Durable acrylic construction with fiberglass reinforcement for lasting beauty
- Accessible, low, single threshold design for easy entry and exit
- Curved design for more comfortable floor space
- Center drain location
- Shower drain with stainless steel drain cover included
- Integral water retention flanges to prevent behind-the-wall leaks and makes tiling easier
- Limited Lifetime Warranty

**Nominal Dimensions:**

36" x 36" x 3-1/4"  
(914 x 914 x 82mm)

**Compliance Certifications -**

**Meets or Exceeds the Following Specifications:**

- CSA B45.5 / IAPMO Z124




SEE REVERSE SIDE FOR ROUGHING-IN  
DIMENSIONS AND PRODUCT SPECIFICATIONS

**NOTES:**

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH SHOWER  
BASE FOR ADDITIONAL INFORMATION.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the  
range of tolerances established by ANSI Standard CSA B45.5 / IAPMO Z124.  
These measurements are subject to change or cancellation. No responsibil-  
ity is assumed for use of superseded or voided pages.

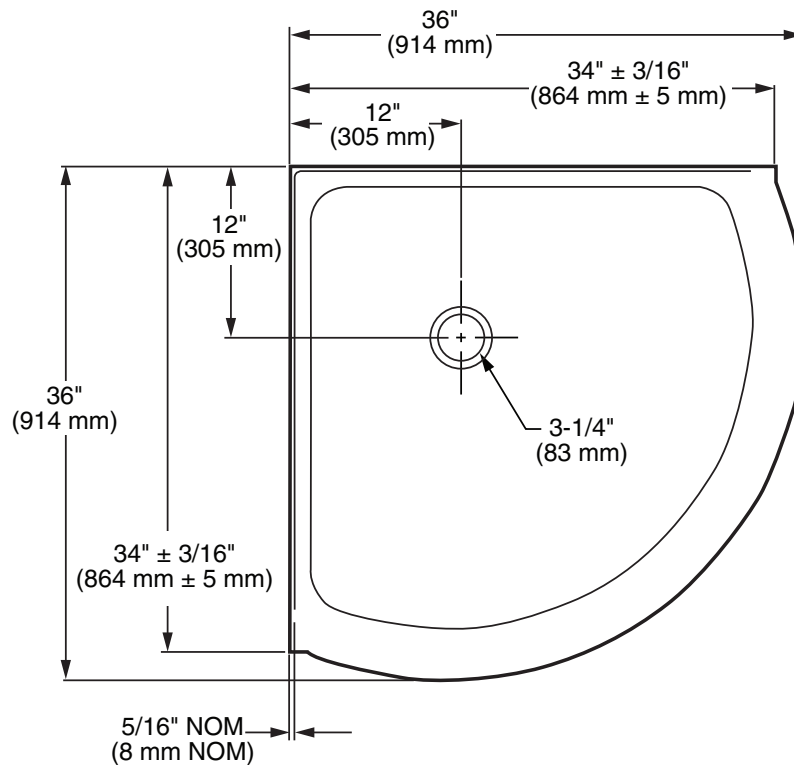

**GENERAL SPECIFICATIONS FOR 3636A-ST3 SHOWER BASE**

INSTALLED SIZE \_\_\_\_\_ 36 x 36 x 3-1/4 IN.  
(914mm x 914mm x 82mm)

WEIGHT \_\_\_\_\_ 31.5 LBS. (14 Kg.)

WEIGHT w/WATER \_\_\_\_\_ 85 LBS. (39 Kg.)

SHOWER WELL AT SUMP \_\_\_\_\_ 28 x 28 IN. (711mm x 711mm)

SHOWER WELL AT RIM \_\_\_\_\_ 29-5/8 x 29-5/8 IN. (752mm x 752mm)

FLOOR LOADING \_\_\_\_\_ 11 LBS./SQ. FT. (51 Kgs/Sq. m.)  
(PROJECTED AREA)