
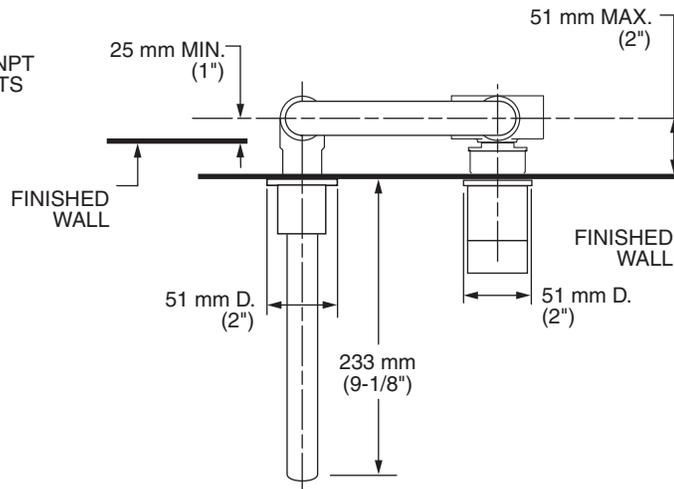


MODEL NUMBER:

- 2064.461 Serin Single Control Wall Mount Grid Drain.

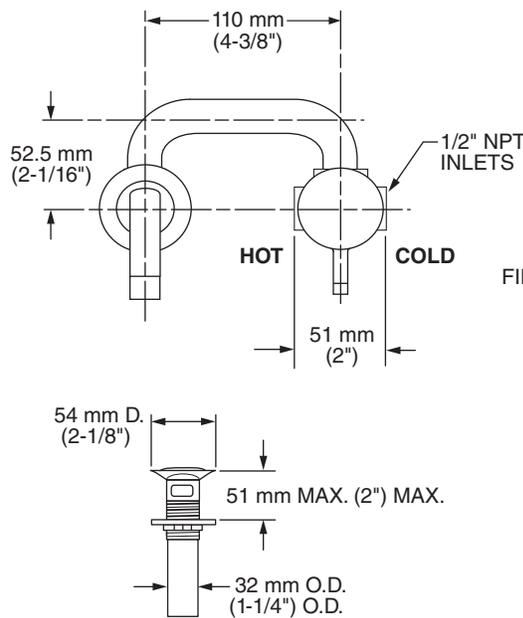

GENERAL DESCRIPTION:

Cast brass valve body on 4" centers. 35mm washerless ceramic disc valve cartridge with integral hot limit safety stop. Brass spout, metal lever handle. All brass grid drain body with 1-1/4" (32mm) tailpiece. 1.2 gpm/4.5 L/min. maximum flow rate.

PRODUCT FEATURES:

Brass Construction: Durable. Easy to clean. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridge: Assures a lifetime of smooth handle operation and drip-free performance.

Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.


SUGGESTED SPECIFICATION

One-handle in-wall lavatory faucet shall feature cast brass valve body. Shall also feature a washerless ceramic disc valve cartridge with integral hot limit safety stop. Fitting shall be American Standard Model #2064.461__.

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ANSI A117.1**
- ASME A112.18.1**
- CSA B125.1**
- NSF 61/Section 9 and Annex G**

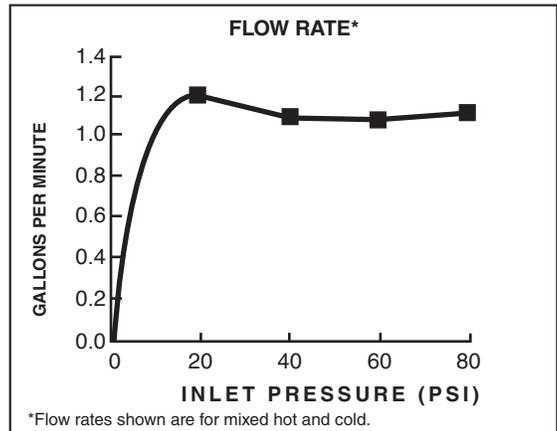

Product Number	Description	Finish Options	
		Polished Chrome	PVD Brushed Nickel
		002	295
2064.461	Serin one-handle wall mount with grid drain.		

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.

AERATOR MODIFICATIONS***	Parts Suffix**
1.0 gpm (3.8 Lpm) PCA Aerator	___F10

*PCA — Pressure Compenbrushedg

To modify a product, add suffix after the 4th digit (ex. 2064F05**101.002)

***Modified product models are **NOT** WaterSense certified.