
American Standard

# TROPIC® TWO-HANDLE WIDESPREAD LAVATORY FAUCET WITH BRASS SPOUT



### **MODEL NUMBER:**

□ 7038.801 Tropic Widespread Metal Speed Connect<sup>®</sup> pop-up drain. Metal lever handles.

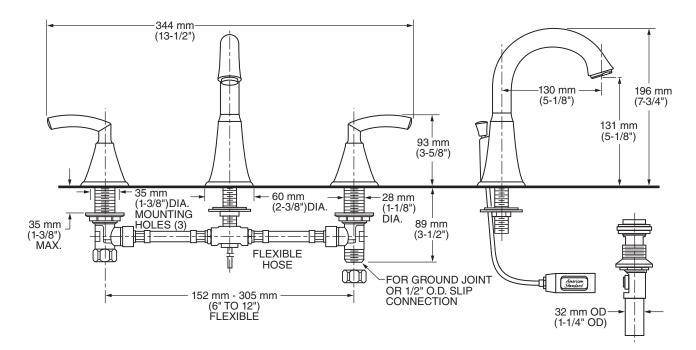

### **GENERAL DESCRIPTION:**

Durable cast brass spout and metal lever handles. Cast brass valve bodies with flexible hose connections for 6" to 12" (152 mm to 305 mm) installations. One-half inch male inlet shanks with brass coupling nuts. 1/4 turn washerless ceramic disc valve cartridges. 20 inch (500 mm) long flexible stainless steel drain cable is pre-assembled to spout. Metal Speed Connect<sup>®</sup> drain body with 1-1/4" (32 mm) tail piece. 1.2 gpm/4.5 L/min. maximum flow rate.

# **PRODUCT FEATURES:**

Brass Construction: Ideal for prolonged contact with water.

**Ceramic Disc Valve Cartridge:** Assures a lifetime of smooth handle operation and drip-free performance.

#### **Exclusive Speed Connect Metal Drain:**

- Fewer parts. Installs in less time.
- No adjustments required seals the first time, every time.
- Flexible stainless steel cable installs effortlessly in tight spaces.

**Lead Free:** Faucet contains  $\leq 0.25\%$  total lead content by weighted average.

### SUGGESTED SPECIFICATION

Two-handle widespread lavatory faucet shall feature a cast brass spout and valve bodies with flexible hose connections for 6" to 12" installations. Shall feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature a metal drain body with stainless steel cable actuation. Fitting shall be American Standard Model # 7038.801.\_\_\_\_.


American Standard

# TROPIC® TWO-HANDLE WIDESPREAD LAVATORY FAUCET WITH BRASS SPOUT

## **CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1 CSA B125.1 NSF 61/Section 9 and Annex G

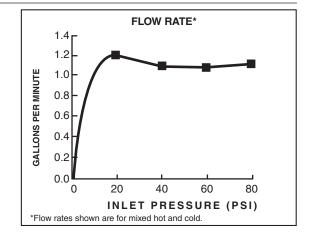

		Finish Options	
		Polished Chrome	PVD Brushed Nickel
Product Number	Description	002	295
7038.801	Tropic Widespread with metal Speed Connect® pop-up drain.		

Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.

AERATOR MODIFICATIONS***	Parts Suffix**		IODIFICATIONS***	Parts Suffix**
0.5 gpm (1.9 Lpm) PCA* Spray	F05		Less Pop-Up Drain	LDH
1.0 gpm (3.8 Lpm) PCA Aerator	F10		Less Hole	

\*PCA — Pressure Compensating

\*\*To modify a product, add suffix after the 4th digit (ex. 2064**F05**101.002)

\*\*\*Modified product models are **NOT** WaterSense certified.