



## TWO-HANDLE CENTERSET LAVATORY FAUCET 6" WRIST BLADE HANDLES AND RIGID/SWIVEL GOOSENECK SPOUT WITH 5" REACH




#### 7500.160 Shown

### MODEL NUMBER:

# ☐ 7500.160 Centerset Lavatory with 6" Wrist Blade Handles

1.5 gpm Pressure compensating aerator. Rigid/swivel gooseneck spout. Vandal-resistant 6" wrist blade handles. LESS drain and pop-up hole.

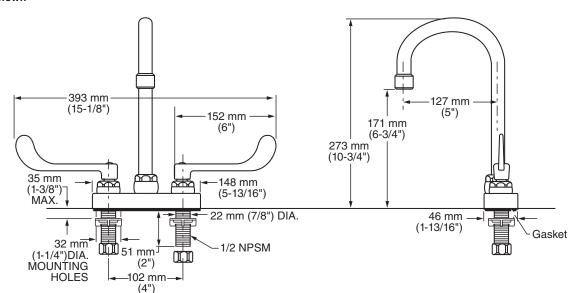

## **GENERAL DESCRIPTION:**

Durable cast brass construction. 1/2" male threaded inlet shanks with shank nuts and brass coupling nuts. 1/4 turn ceramic disc valve cartridges. Field-convertible rigid/swivel gooseneck spout. Vandal-Resistant 6" Wrist Blade handles with blue & red color indexes. 1.5 gpm/5.7 L/min. maximum flow rate.

#### PRODUCT FEATURES:

**Pressure Compensating Aerator:** Provides a constant water flow of 1.5 gpm throughout the pressure range.

**Solid Brass Construction:** Durable. Excellent in high use applications. Ideal for prolonged contact with water.

**Ceramic Disc Valve Cartridges:** Assure a lifetime of drip-free performance.

**Field-Convertible Rigid/Swivel Spout with 8" Reach:** Easily converted in the field.

**Lead Free:** Faucet contains ≤ 0.25% total lead content by weighted average.

#### SUGGESTED SPECIFICATION

4" Centerset Lavatory Faucet shall be cast brass construction with shank nuts and brass coupling nuts. Shall feature water-conserving 1.5 gpm/5.7L/min. pressure compensating aerator. Vandal-Resistant 6" wrist blade handles. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Shall also feature convertible rigid/swivel spout with 8" reach. Fitting shall be American Standard Model # 7500.160.002.

© 2020 AS America Inc. 2/20




## **MONTERREY®**

#### TWO-HANDLE CENTERSET LAVATORY FAUCET 6" WRIST BLADE HANDLES AND RIGID/SWIVEL GOOSENECK SPOUT WITH 5" REACH

## **CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

**ASME A112.18.1 CSA B125.1 NSF 372** 



		Finish
		Polished Chrome
Product Number	Description	002
7500.160	Centerset Lavatory with field-convertible rigid/swivel gooseneck spout. 1.5 gpm/5.7 L/min pressure compensating aerator. Vandal-resistant 6" wrist blade handles. LESS drain and pop-up hole.	



Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for accessible and usable building facilities - check local codes

Other Aerators Available:		
	Part Suffix	Description
	LV15	1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet
	V15	1.5 gpm (5.7 Lpm) Vandal-Resistant PCA Aerator
	LV10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Non-Aerated Laminar Flow Outlet
	V10	1.0 gpm (3.8 Lpm) Vandal-Resistant PCA Aerator
	V05*	0.5 gpm (1.9 Lpm) Vandal-Resistant PCA Multi-Laminar Spray
	V035*	0.35 gpm (1.3 Lpm) Vandal-Resistant PCA Non-Aerated Spray

PCA - Pressure Compensating \*Meets Cal Green Code

2/20 © 2020 AS America Inc.