

Cartiety BPIG PAT

MODEL NUMBER:

9389.110 Single Control Centerset Metal Lever Handle. 50/50 pop-up drain.

6-1/16" (154mm)

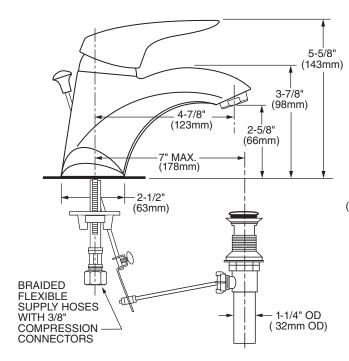

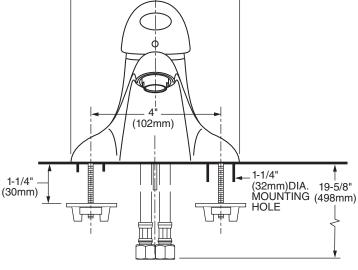

GENERAL DESCRIPTION:

All metal body with choice of Metal Lever Lever Handle. Washerless 47mm ceramic disc valve cartridge with integral hot limit safety stop. Durable cast brass waterway. Braided flexible supply hoses with 3/8" compression connections. 50/50 pop-up drain body with 1-1/4" (32mm) tail piece. 1.5 gpm/5.7L/min. maximum flow rate.

PRODUCT FEATURES:

Cast Brass Waterway with Flexible Supply Hoses: Strong and durable. Less potential for leaks.

Ceramic Disc Valve Cartridge: Assures smooth, precise valve control and a lifetime of drip-free, maintenance-free performance.

Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

Lead Free: Faucet contains ≤ 0.25% total lead content by weighted average.

Simple One-Person Installation: Faucet drops in from top. Quick spin nuts secure faucet in place.

SUGGESTED SPECIFICATION

Single control lavatory fitting shall feature an all metal body with metal lever handle. Shall feature a cast brass waterway with flexible hose connections. Shall also feature a washerless ceramic disc valve cartridge with integral hot limit safety stop. Shall also feature a 50/50 pop-up drain body. Fitting shall be American Standard Model # 9385.110.002.




CALLAHAN™ SINGLE CONTROL LAVATORY FAUCET

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1 ASME A112.18.1 CSA B 125 NSF 61/Section 9 & Annex G



		Finish Options
Product		Polished Chrome
Number	Description	002
9389.110	Single Control Centerset with braided flexible supply hoses. Metal lever handle. 50/50 pop-up drain.	

E

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.