American Standard

CHAMPION® 4 CHAIR HEIGHT ELONGATED COMPLETE TOILET

& BARRIER FREE

VITREOUS CHINA

CHAMPION® 4 CHAIR HEIGHT ELONGATED COMPLETE TOILET

□ 731AA101S.222

- Clog resistant Can flush 2.2 pounds of solid waste in a single flush
- Superior solid waste removal with 1,000 gram MaP score**
- Vitreous china
- Toilet stays cleaner longer with EverClean[®] surface. EverClean surface inhibits the growth of stainand odor-causing bacteria, mold, and mildew on the surface
- Uses 4.8 Lpf/1.28 gpf
- PowerWash[®] rim rinses the bowl with pressurized water with every flush
- Meets EPA WaterSense[®] Criteria
- Features Champion® Flushing System
- 4" non-adjustable piston action Accelerator[™] flush valve
- 16-1/2" rim height for accessible applications
- 2-3/8" fully-glazed trapway
- · Chrome finish trip lever is supplied
- Sweeping pier on bowl
- 100% factory flush tested
- 2 bolt caps
- Includes Slow Close Seat
- Wax ring gasket with closet bolts
- Lifetime warranty on chinaware, 10 year warranty on all mechanical parts and 1 year warranty on seat
- Easy Installation. Everything needed for toilet installation is included and can be hand tightened

Nominal Dimensions:

30-1/4" x 17-7/8" x 31-3/16" (768 x 454 x 792mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications: ASME A112.19.2/CSA B45.1 for Vitreous

- China Fixtures
- US EPA WaterSense® Specification for HETs


To Be Specified:

- Color: Linen
- Supply with stop:
- ** Maximum Performance (MaP) testing performed by IAPMO R&T Lab. MaP Report conducted by Gauley Associates Ltd. and Koeller and Company.



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES AND ICC ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND USABLE BUILDING FACILITIES-CHECK LOCAL CODES.



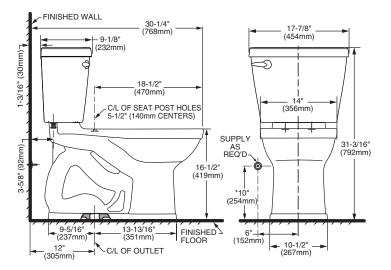

NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY * DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME A112.19.2/CSA 845.1 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.





POWER WASH RIM

© 2023 AS America Inc.