

**Cadet Touchless Chair Height
Elongated Complete Toilet**

580AA709 Chair Height Elongated Toilet

- Complete toilet includes bowl, tank, sensor, installation parts, seat and wax ring
- Simple hand wave touchless flush technology
- 2-1/2" diameter sensor module can be installed on wall within 3 feet of toilet or on top of toilet tank itself
- Siphon action jetted bowl
- Ultra-low consumption (1.28 gpf/4.8 Lpf) utilizes 20% less water
- Meets EPA WaterSense® criteria
- 12" (305mm) rough installation
- 3" flush valve with integrated fill valve
- 2-1/8" trapway bowl with EverClean® surface included
- Obtains best 1,000g MaP flush score**
- Powered by 3 AAA sensor and 4 AA control module batteries (included)
- Convenient, manual polished chrome override flush actuator on side of tank
- Limited lifetime warranty on chinaware, limited 5 year warranty on all mechanical parts, and limited 1 year warranty on electronic parts



Nominal Dimensions:

30-3/16" x 15-13/16" x 30-11/16"
(767 x 401 x 780 mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2/CSA B45.1 for Vitreous China Fixtures
- US EPA WaterSense® Specification for HETs

SEE REVERSE FOR ROUGHING-IN DIMENSIONS

** Maximum Performance (MaP) testing performed by IAPMO R&T Lab. MaP Report conducted by Gauley Associates Ltd. and Koeller and Company.


To Be Specified:

- ☐ Color: ☐ White
- ☐ Supply with stop:



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES
AND ICC ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND
USABLE BUILDING FACILITIES-CHECK LOCAL CODES.



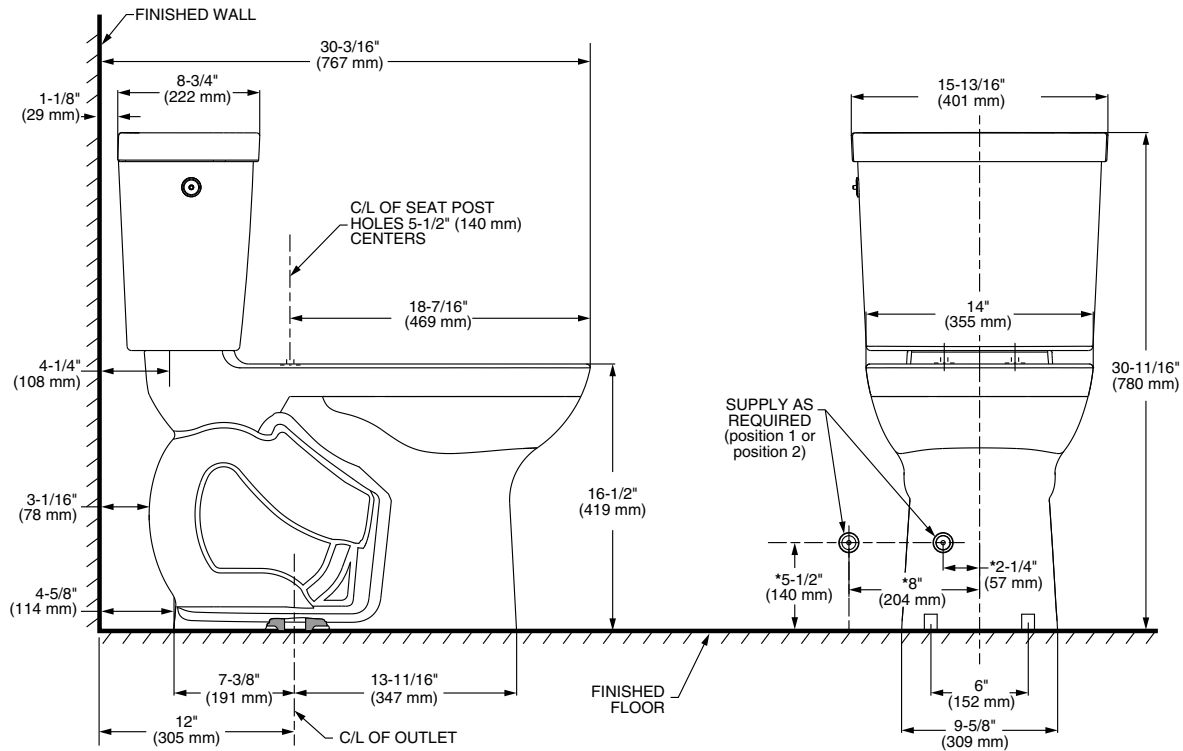

NOTES:

THIS COMBINATION IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.
 * DIMENSIONS SHOWN FOR LOCATION OF SUPPLY ARE SUGGESTED.
 SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2.
 These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.