



**Titan® Chair Height Elongated Complete
Toilet With Aquaguard® Insulated Tank**

733AA.051

- Includes Aquaguard® liner which helps omit tank condensation
- Industry-leading clog resistance with a 4" non-adjustable, piston action Accelerator™ flush valve and a 2-3/8" fully-glazed trapway
- Includes EverClean® surface which inhibits the growth of stain and odor causing bacteria, mold, and mildew on the surface
- Vitreous china
- Low consumption 1.6 gallons per flush (6.0 Lpf)
- Easy installation - Everything needed for toilet installation is included and can be hand tightened
- 12" (305mm) rough-in
- 16-1/2" rim height for accessible applications
- Elongated siphon action jetted bowl
- Speed Connect® tank/bowl coupling system
- Chrome-plated handle
- Sweeping pier on bowl which helps omit buildup of dust and dirt between the tank and the bowl
- 100% factory flush tested
- 2 bolt caps
- Includes a plastic, color-matched, slow-close toilet seat
- Wax ring gasket with closet bolts
- Lifetime warranty on chinaware, 10 year warranty on all mechanical parts, and 1 year warranty on seat

Nominal Dimensions:

30-1/4" x 18" x 31-3/16"
(768 x 457 x 792mm)

**Compliance Certifications -
Meets or Exceeds the Following
Specifications:**


- ASME A112.19.2/CSA B45.1 for Vitreous China Fixtures

To Be Specified:

- ☐ Color: ☐ White ☐ Linen ☐ Bone
☐ Supply with stop:



MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES
AND ICC ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND
USABLE BUILDING FACILITIES-CHECK LOCAL CODES.

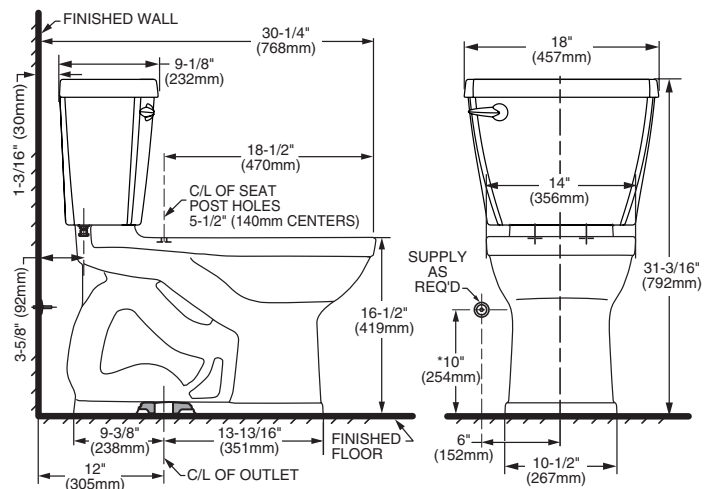

NOTES:

THIS COMBINATION IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.

* DIMENSIONS SHOWN FOR LOCATION OF SUPPLY ARE SUGGESTED. SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.



EVERCLEAN®

Aquawash® 2.0 Manual Operated SpaLet® Seat

8019A60GPC.020- Elongated Seat

- Two independent water sprays for front and back cleansing.
- The dual water spray system is self cleansing. Each nozzle is rinsed with water before and after each use.
- Instant heating provides unlimited warm water on demand
- The heated seat function has 3 levels including OFF. Temperature can be easily adjusted for comfort
- Soft night light to guide you at night.
- Slow-close seat and lid
- One button push that allows the user to easily detach the seat for convenient cleaning of hard-to-reach areas
- Stylish, 95 mm low profile design for use with most elongated bowls
- Dial for manual operation control attached to the side of the seat
- Seat weighs 7.20 lbs. (3.3 kg)

Nominal Dimensions:

14-7/16" x 20" x 3-3/4"
(367 x 508 x 95 mm)

Available Spare Parts:

- **760242-200.0070A** - Mounting Kit
- **760240-200.0070A** - Bidet Shield

Compliance Certifications -


Meets or Exceeds the Following Specifications:

- ASME A112.4.2/CSA B45.16
- Personal Hygiene and Health Care Appliances
- UL 1431
- Motor-operated appliances (household and commercial)
- CSA C22.2 No.68-14
- Update No. 3
- Household Cooking and Liquid-Heating Appliances
- CSA C22.2 No. 64-14 Certifications:
- IAPMO(cUPC)
- State of Massachusetts Code Compliance:
- UPC
- IPC
- NSPC
- NPC Canada

Rated Power Source : 120 VAC, 60 Hz

Rated Power Consumption : 1,000 W

Power Cord Effective Length : 42" (1067mm)

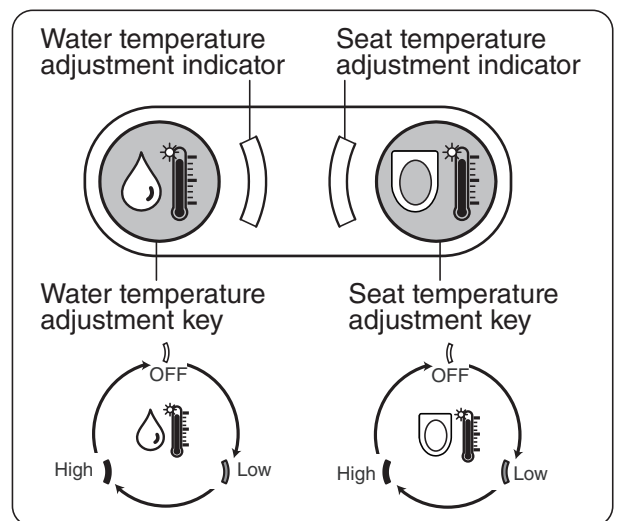


SEE REVERSE FOR ROUGHING-IN DIMENSIONS
AND PRODUCT SPECIFICATIONS

To Be Specified:

☐ Color: ☐ 020 White



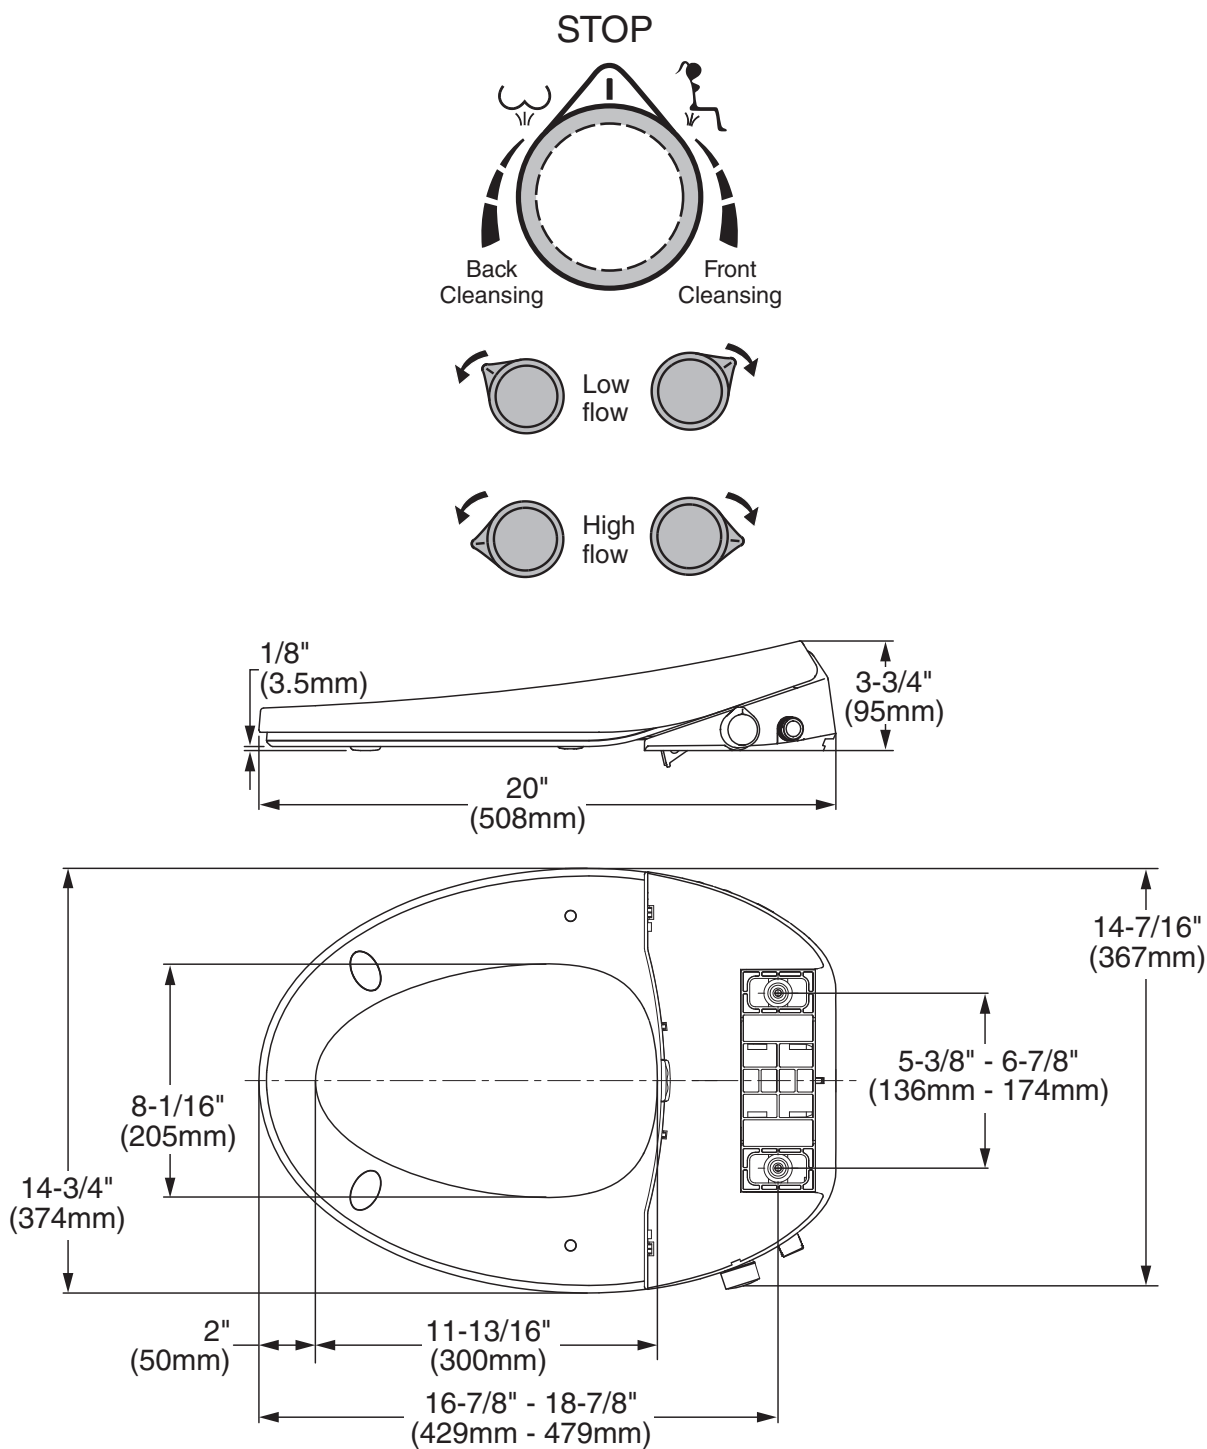

IMPORTANT:

Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.