

Mainstream® 60" x 32" 8 Jet Integral Apron Whirlpool

- ☐ **2948LC-RHO.020** Mainstream 60x32 8 Jet Whirlpool, Right Hand Drain Outlet
- ☐ **2948LC-LHO.020** Mainstream 60x32 8 Jet Whirlpool, Left Hand Drain Outlet
- Acrylic with fiberglass reinforcement
- Features EverClean® whirlpool system which suppresses the growth of unsightly algae, fungus, mold and mildew.
- Integral apron with removable access panel
- Three-sided, tiling/water retention flange
- 1.4 HP self-draining pump/motor with dry run seal
- 8 Fully adjustable clean jets
- Side-mounted On/Off control
- 2 Silent air volume controls
- Textured, slip-resistant tub floor
- Features easy install heater connection system. Safe-T-Heater, model 9075.120.000, sold separately
- 1699500.020 Mainstream Deep Soak Drain Kit required, sold separately
- Limited lifetime warranty

Nominal Dimensions:

60" x 32" x 21-1/2"
(1524 x 813 x 546 mm)

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

Components Required:

- ☐ Mainstream Whirlpool Drain Kit: 1699500.020

Custom Accessories Available:


- ☐ Safe-T-Heater: 9075.120.000



SEE REVERSE FOR ROUGHING-IN DIMENSIONS
AND PRODUCT SPECIFICATIONS

NOTE: Whirlpool Heater is designed to maintain water temperature during operation. It will not heat cold water to desired bathing temperature.

Model 2948LC-RHO Shown

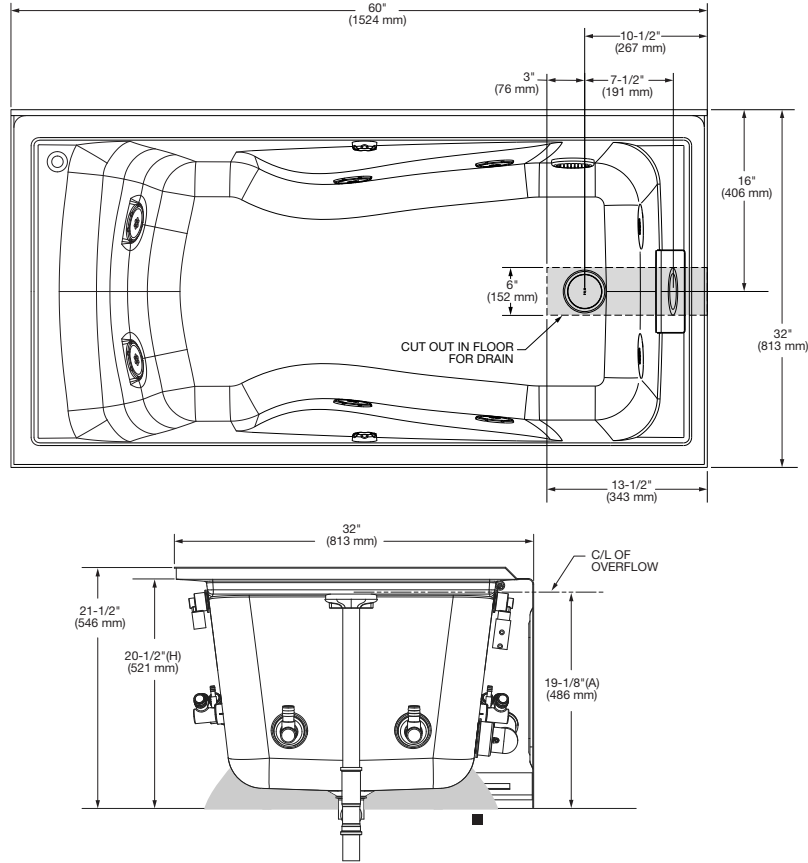

DIMENSIONS OF FIXTURES ARE NOMINAL AND MAY VARY WITHIN THE RANGE
OF TOLERANCES ESTABLISHED BY ANSI STANDARDS Z124.1 AND A112.19.7

GENERAL SPECIFICATIONS FOR 2928LC WHIRLPOOL

INSTALLED SIZE _____ 60 x 32 x 20-1/2 (1524 x 813 x 521mm)
 WEIGHT _____ 92 Lbs. (42 Kg.)
 WEIGHT w/WATER _____ 675 Lbs. (306 Kg.)
 GAL. TO OVERFLOW _____ 70 Gal. (265 L.)
 WHIRLPOOL MIN. OPERATING VOL. _____ 39 Gal. (148 L.)
 BATHING WELL AT SUMP _____ 42 x 22 (1067 x 559mm)
 BATHING WELL AT RIM _____ 53 x 25-1/2 (1346 x 648mm)
 WATER DEPTH TO OVERFLOW _____ 17-1/2 (445mm)
 FLOOR LOADING _____ 51 Lbs./Sq.Ft. (247 Kgs./Sq.m)
 (PROJECTED AREA)

WHIRLPOOL ELECTRICAL SPECIFICATIONS

PUMP _____ 1.4 HPR, 9.7 AMPS, 120V.

NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND, OR PENINSULA TYPE INSTALLATION. SUPPORT OF BATH BY SUMP BEDDING. SUPPORT AND ENCLOSING MATERIAL BY OTHERS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.