

**PRINCETON® SKIRTED BATH**

Americast® brand engineered material

- ☐ **2390S** Left Hand Outlet
- ☐ **2391S** Right Hand Outlet
  - Durable Americast with acid resistant porcelain finish
  - Half the weight of a cast iron tub
  - Alcove bath with integral apron
  - Integral base and tiling flange for easier installation
  - Beveled headrest and integral lumbar support for comfortable reclining
  - End drain outlet
  - Full slip-resistant tub floor
  - Limited Lifetime Warranty - Made in USA
  - Low step-over height is ideal for families, showering

**Nominal Dimensions:**

60" x 30" x 14"  
(1524 x 762 x 356mm)

**Bathing Well Dimensions:**

1423 x 635 x 337mm  
(56" x 25" x 13-1/4")

**Compliance Certifications -**

**Meets or Exceeds the Following Specifications:**

- ASME A112.19.1-2008/CSA B45.2-08
- ASTM F-462 for Slip-resistant Bathing Facilities
- ANSI Z124.1 Ignition Test
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

Americast® brand engineered material is a composition of porcelain bonded to enameling grade metal, bonded to a patented structural composite.




SEE REVERSE FOR PRODUCT DIMENSIONS  
AND SPECIFICATIONS

**To Be Specified - Required:**

- ☐ Color:
- ☐ Bath Faucet\*:
- ☐ Faucet Finish:
- ☐ Drain:
- ☐ Drain Finish:

\*See faucet section for additional models available

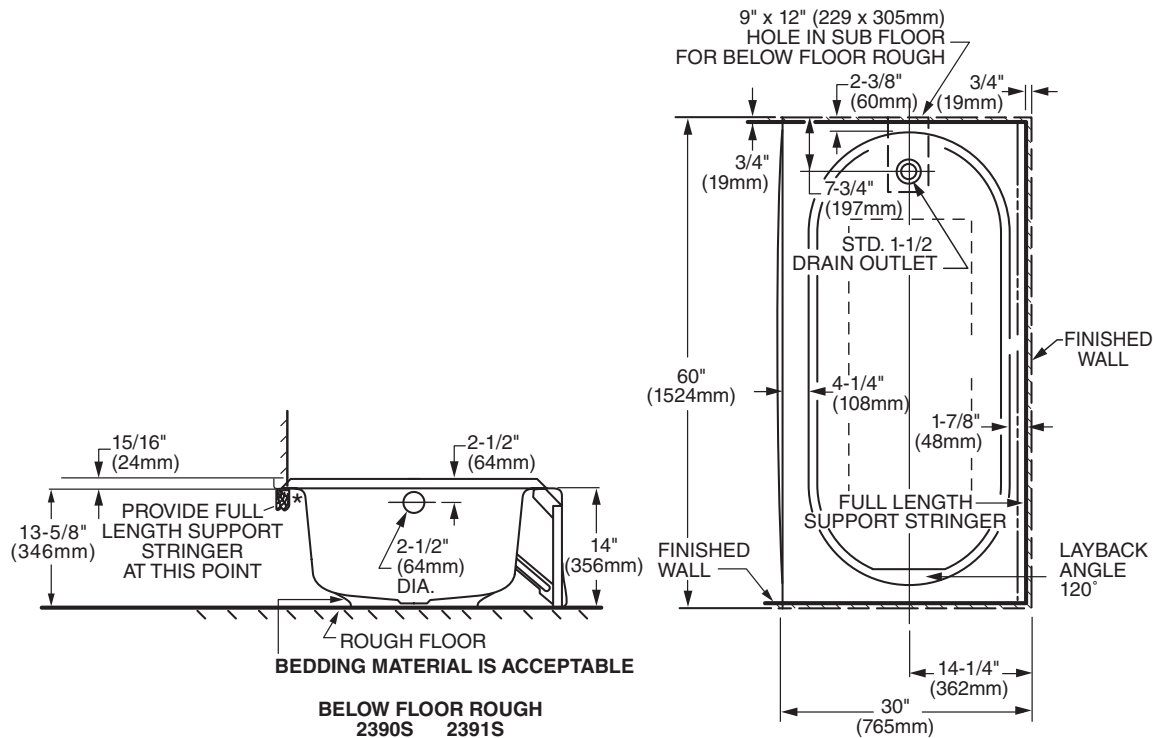


**LEFT HAND TUB ILLUSTRATED  
RIGHT HAND TUB IS REVERSED**

*Below is shown typical cross sections of the tub rim showing typical wall constructions.*


**GENERAL SPECIFICATIONS FOR 2390/2391 BATHING POOL**

INSTALLED SIZE	60 x 30 x 14 In. (1524 x 762 x 356mm)
WEIGHT	110 Lbs. (50 Kg.)
WEIGHT w/WATER	460 Lbs. (209 Kg.)
GAL. TO OVERFLOW	42 Gal. (159 L)
BATHING WELL AT SUMP	42 x 19 In. (1067 x 483mm)
BATHING WELL AT RIM	56 x 25 In. (1423 x 635mm)
WATER DEPTH TO OVERFLOW	9-1/2 In. (241mm)
FLOOR LOADING	37 Lbs./Sq.Ft. (175 Kgs./Sq.m)
(PROJECTED AREA)	
PTS.	6.2
CUBE (FT <sup>3</sup> )	18.1

**WOOD STUDS**



**STEEL STUDS**



51 x 102mm (2 x 4) WOOD STRINGER FULL LENGTH

**NOTES:**

LEFT HAND OUTLET SHOWN, RIGHT HAND REVERSE DIMENSIONS (2391S).

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH FITTING.

CONCEALED PIPING NOT FURNISHED.

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL WALL SUPPORTS.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH BATH.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ASME A112.19.1-2008/CSA B45.2-08. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.