FAIRACRES™ 33 x 22 STAINLESS STEEL KITCHEN SINK KIT
20 GAUGE STAINLESS STEEL

American Standard

FAIRACRES™ 33 x 22 STAINLESS STEEL KITCHEN SINK KIT

❏ **20DB.332211L.075** 50/50 Double Bowl Sink
Kit includes:
- Double bowl sink
- Waste fittings
- Coordinating pull-down faucet
- Installation instructions and cutout template
- Top mount installation hardware

❏ **Stainless Steel Sink**
- 50/50 Double Bowl
- 20 Gauge Stainless Steel
- 18-10 Chrome Nickel content
- Dual mount installation
- 36" (914mm) cabinet required
- Limited Lifetime Warranty

Nominal Dimensions:
33" x 22" x 9"
(838 x 559 x 229mm)

Bowl Size (equal size bowls):
14-9/16" (370mm) wide
19-7/16" (493mm) front to back
9" (229mm) deep

❏ **Pull-Down Faucet**
- 1.8 gpm
- Brass swivel spout
- Ceramic disc valve cartridge for drip free performance
- Spray and Stream Functions
- Lead Free: Faucet contains ≤ 0.25% lead content by weighted average
- Limited Lifetime Warranty

❏ **Strainer**
- Standard 3-1/2" (89mm) diameter
- Limited Lifetime Warranty

SEE REVERSE FOR ROUGHING-IN DIMENSIONS AND PRODUCT SPECIFICATIONS

Suggested Specifications:
❏ Color: Stainless Steel .075
❏ Faucet Finish: Stainless Steel .075
❏ Waste Fitting Finish: Stainless Steel .075
❏ Supplies: 1/2" (13mm) IPS Inlets

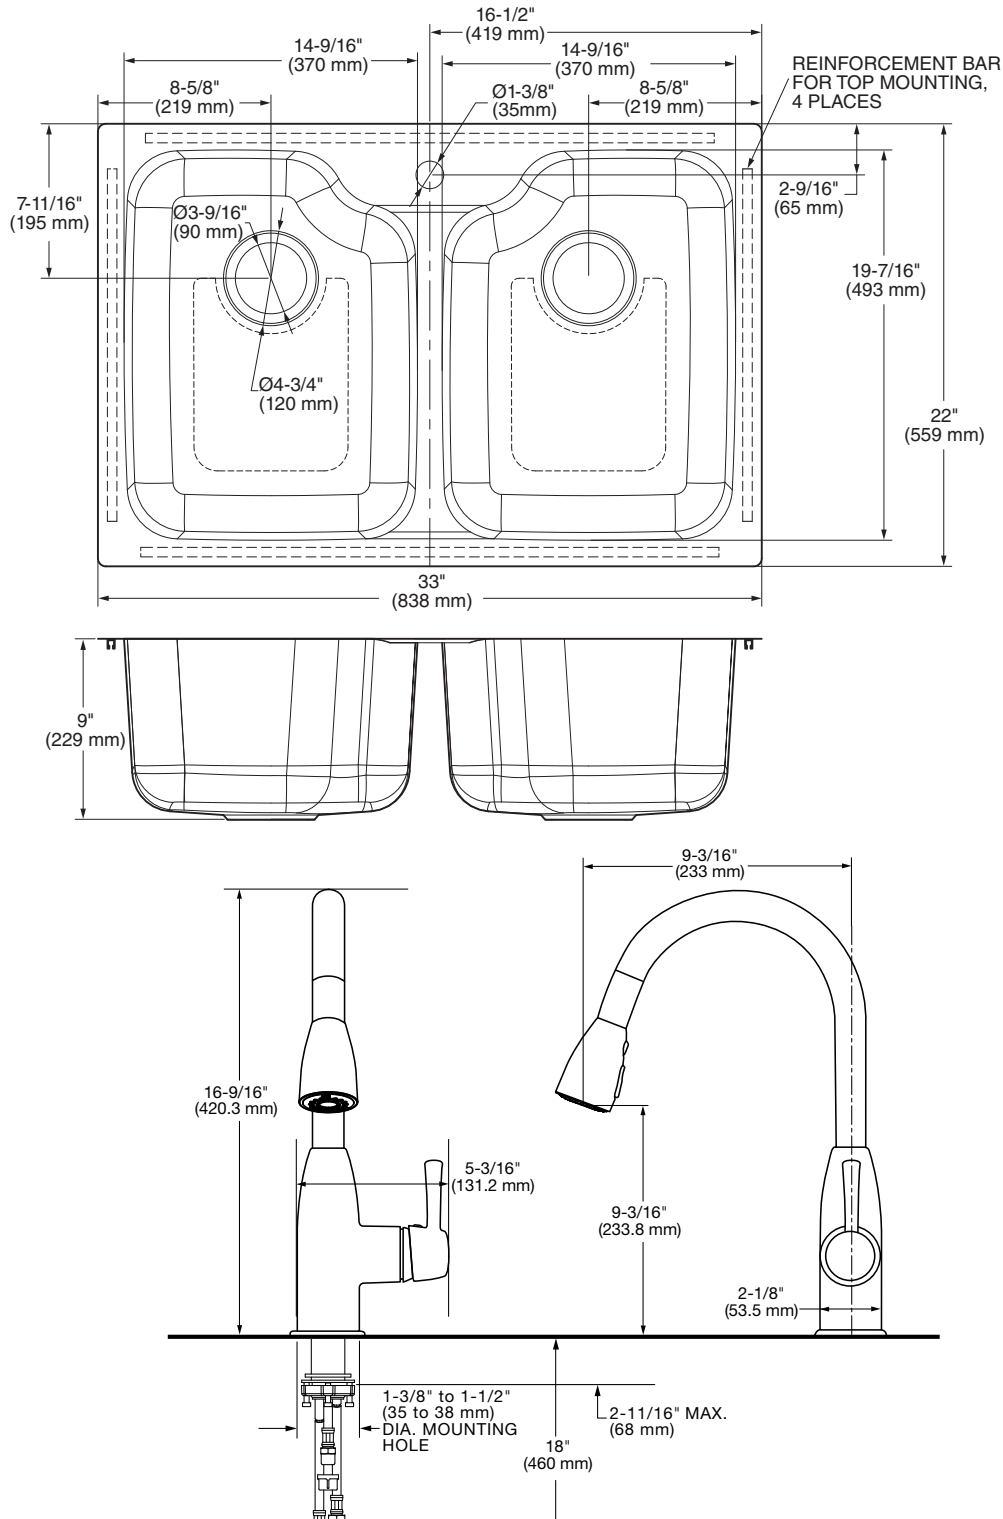**Compliance Certifications - Meets or Exceeds the Following Specifications:**

- **SINK:**
  ASME A112.19.3

- **FAUCET:**
  ASME A112.18.1
  CSA B125.1
  NSF 61/Section 9
  NSF 372
  ANSI A117.1

American Standard

PART OF LIXIL

14-9/16" (370 mm)

16-1/2" (419 mm)

14-9/16" (370 mm)

REINFORCEMENT BAR FOR TOP MOUNTING, 4 PLACES

8-5/8" (219 mm)

Ø1-3/8" (35mm)

8-5/8" (219 mm)

7-11/16" (195 mm)

Ø3-9/16" (90 mm)

2-9/16" (65 mm)

19-7/16" (493 mm)

Ø4-3/4" (120 mm)

22" (559 mm)

33" (838 mm)

9" (229 mm)

9-3/16" (233 mm)

16-9/16" (420.3 mm)

5-3/16" (131.2 mm)

9-3/16" (233.8 mm)

2-1/8" (53.5 mm)

1-3/8" to 1-1/2" (35 to 38 mm) DIA. MOUNTING HOLE

2-11/16" MAX. (68 mm)

18" (460 mm)

NOTES:
WE RECOMMEND USING BASIN AS A TEMPLATE TO DETERMINE PROPER CONTOUR. CUT COUNTERTOP 38MM (1-1/2") INSIDE BASIN CONTOUR.
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIED AND "P" TRAP ARE SUGGESTED.
SEALING COMPOUND SUPPLIED BY OTHERS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.3. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.