


## **Delancey**<sup>®</sup> Single Control Lavatory Faucet

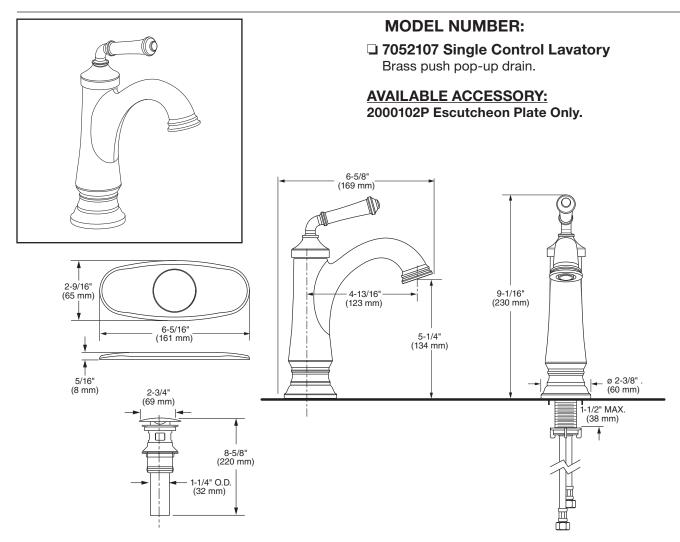

### **GENERAL DESCRIPTION:**

- Cast brass spout
- Washerless 28 mm ceramic disc valve cartridge with integral hot limit safety stop.
- Integrated 24" braided supply hoses with 3/8" compression

connections

- Brass push pop-up drain
- 1.2 gpm/4.5 L/min maximum flow rate



ADA COMPLIANT EPA WATERSENSE® CERTIFIED

### **PRODUCT FEATURES:**

**Brass Construction:** Durable. Easy to clean. Ideal for prolonged contact with water.

**Ceramic Disc Valve Cartridge:** Assures a lifetime of smooth handle operation and drip-free performance.

Adjustable Hot Limit Safety Stop: Limits the amount of hot water allowed to mix with cold. Reduces the risk of accidental scalding.

#### **Push Pop-Up Drain:**

- Fewer parts. Installs in less time.
- No adjustments required seals the first time, every time.

**Lead Free:** Faucet contains  $\leq 0.25\%$  total lead content by weighted average.

## SUGGESTED SPECIFICATION

Single control lavatory faucet shall feature a brass body and metal lever handle. Fitting shall be equipped with flexible supplies with 3/8" compression connectors. Shall also feature washerless ceramic disc valve cartridge with an integral hot limit safety stop. Shall also feature a metal drain body. Fitting shall be American Standard Model # 7052107.\_\_\_.


American Standard

# **Delancey**® Single Control Lavatory Faucet

### **CODES AND STANDARDS**

These products meet or exceed the following codes and standards:

**ANSI A117.1** ASME A112.18.1 CSA B125.1 NSF/ANSI/CAN 61: Q<1 NSF/ANSI/CAN 372

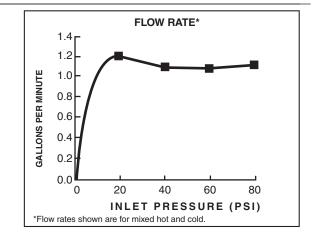

		Finish Options				
Durchurch		Polished Chrome	Brushed Nickel	Polished Nickel	Legacy Bronze	Brushed Cool Sunrise
Product Number	Description	002	295	013	278	GN0
7052107	Single Control Lavatory. Brass push pop-up drain.	$\checkmark$	$\checkmark$	$\checkmark$	$\checkmark$	$\checkmark$
2000102P	Universal Deck Plate	$\checkmark$	$\checkmark$	$\checkmark$	$\checkmark$	$\checkmark$



ADA Meets the American Disabilities Act Guidelines and ANSI A117.1 Requirements for the physically challenged.