

**CADET® 3 CONCEALED TRAPWAY
RIGHT HEIGHT® ELONGATED COMPLETE TOILET**

715AA.001

- Vitreous china
- Meets definition for HET (High Efficiency Toilet)
- High efficiency (4.8 Lpf/1.28 gpf)
- Meets EPA WaterSense® criteria
- 305mm (12") rough-in
- 16-1/2" rim height for accessible applications
- EverClean® surface inhibits the growth of stain- and odor-causing bacteria, mold, and mildew on the surface
- Features the **Cadet® 3 Flushing System**
- Elongated siphon action jetted bowl with smooth-sided, concealed trapway
- 2-1/16" fully glazed trapway
- Generous 9" x 8" water surface area
- PowerWash® rim scrubs bowl with pressurized water every flush
- Oversized 3" flush valve
- Features **No Tools Installation**. Everything needed for toilet installation is included and can be hand tightened
- Chrome-plated trip lever
- Includes top mounting, plastic, Slow Close EverClean seat and telescoping cover which conceals seat ring when closed
- 2 color-matched bolt hole covers
- 100% factory flush tested
- Wax ring gasket with closet bolts
- Lifetime warranty on chinaware, 5 year warranty on all mechanical parts, and 1 year warranty on seat



SEE REVERSE FOR ADDITIONAL ROUGHING-IN DIMENSIONS

To Be Specified:

- Color: White
- Supply with stop:

Nominal Dimensions:


30-1/4" x 17-7/8" x 31"
(768 x 454 x 787mm)


Fixture, toilet seat, wax ring, and bowl bolts only.
Supply by others

Compliance Certifications -

Meets or Exceeds the Following Specifications:

- ASME A112.19.2-2008/CSA B45.1-08 for Vitreous China Fixtures
- US EPA WaterSense® Specification for HET's



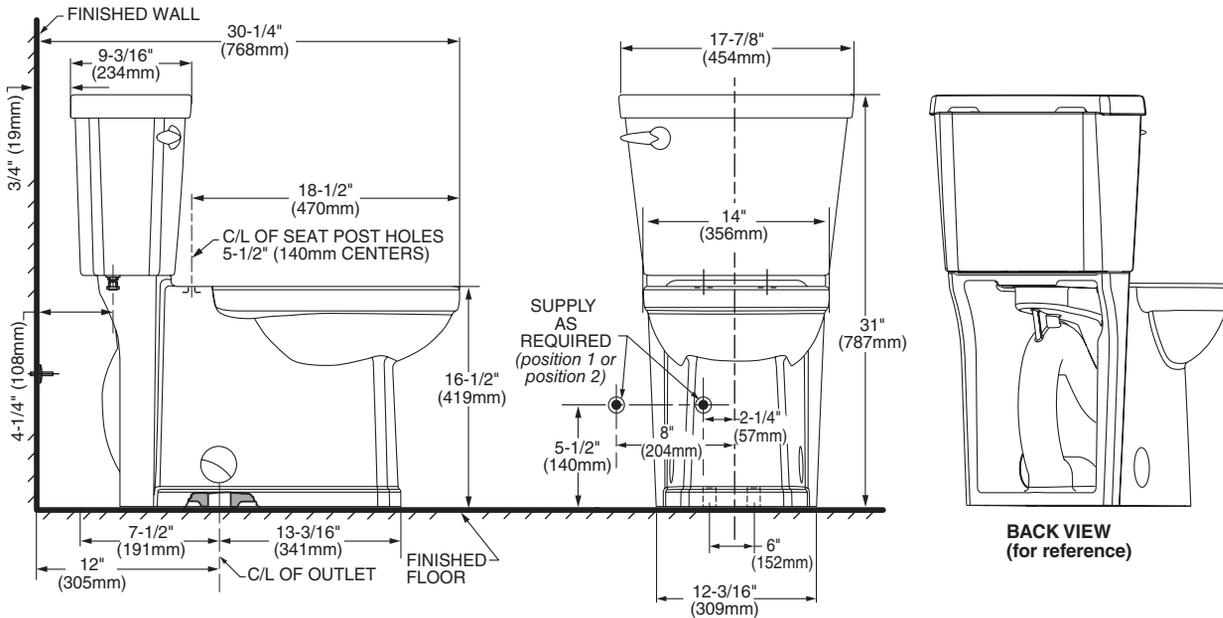

IMPORTANT: Water supply on the wall is required at 2-1/4" or 8" from centerline of the toilet (see rough-in). First suggested position is hidden behind the toilet. The geometry of the toilet gives space for this installation. The second suggested position is next to the toilet. Between these two positions, the space for the supply between wall and toilet is limited to 4-1/2". In this case, check your supply and hose dimensions.

NOTES:

THIS TOILET IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.