




4800.372H Shown

MODEL NUMBER:

- **4800.372H 6"-12" Widespread Lavatory Faucet**
Flexible hose connections for 6" to 12" center-to-center installations. Metal wrist blade handles with red and blue indexes. 1.5 gpm/5.7 L/min pressure-compensating aerator. Less Drain.

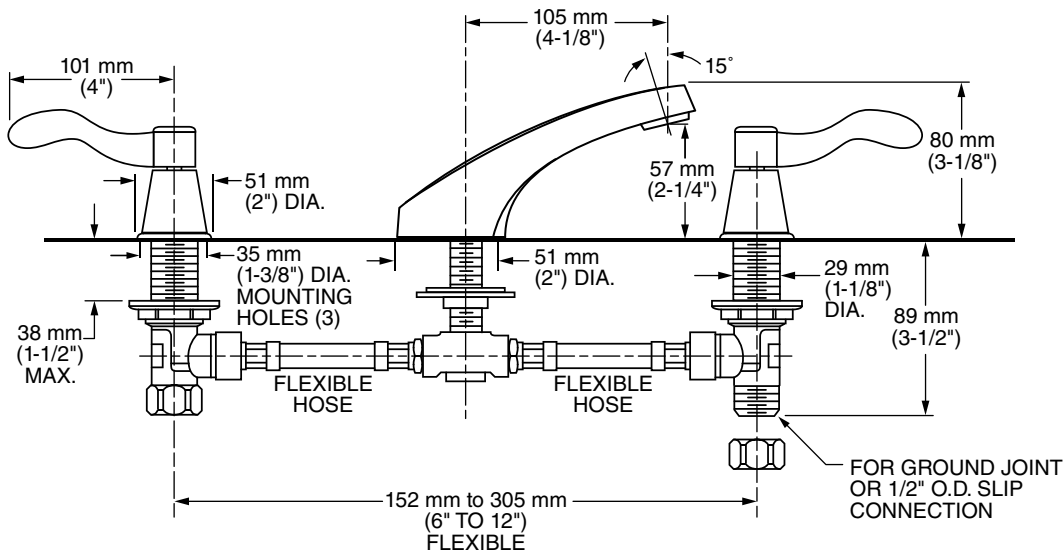

GENERAL DESCRIPTION:

Cast brass valve bodies with reinforced flexible hose connections for 6" to 12" (152mm to 305mm) installations. 1/4 turn washerless ceramic disc valve cartridges. Cast brass spout. One-half inch male inlet shanks with brass coupling nuts and shank nuts. Metal wrist blade handles with red and blue indexes. 1.5 gpm/5.7L/min. maximum flow rate.

PRODUCT FEATURES:

Pressure Compensating Aerator: Provides a constant water flow of 1.5 gpm throughout the pressure range.

Brass Construction: Durable - Excellent in high use applications. Ideal for prolonged contact with water.

Ceramic Disc Valve Cartridges: Assures a lifetime of drip-free performance.

Lead Free: Faucet contains $\leq 0.25\%$ total lead content by weighted average.

SUGGESTED SPECIFICATION:

Two-handle widespread lavatory faucet shall feature cast brass valve bodies with reinforced flexible hose connections for 6" to 12" installations. All brass shank nuts and coupling nuts. Shall feature water-conserving 1.5 gpm/5.7 L/min. pressure-compensating aerator. Shall also feature 1/4 turn washerless ceramic disc valve cartridges. Fitting shall be American Standard Model # 4800.372H.002.




HERITAGE®

TWO-HANDLE 6"- 12" WIDESPREAD LAVATORY FAUCET
WITH CONVENTIONAL SPOUT

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ASME A112.18.1
- CSA B125.1
- NSF 61/Section 9
- NSF 372

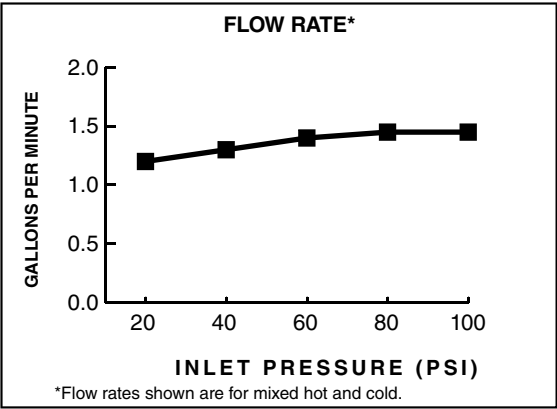

Product Number	Description	Finish
		Polished Chrome
		002
4800.372H	Lavatory faucet. Flexible hose connections for 6" to 12" installations. Rigid gooseneck spout. Metal wrist blade handles with red and blue indexes. 1.5 gpm/5.7L/min pressure-compensating aerator. Less drain.	

MEETS THE AMERICANS WITH DISABILITIES ACT GUIDELINES
AND ANSI A117.1 REQUIREMENTS FOR ACCESSIBLE AND
USABLE BUILDING FACILITIES-CHECK LOCAL CODES