

**AXIS™ 42" NEO CORNER  
SHOWER BASE AND DRAIN**

❑ **4242N-ST3 NEO ANGLE CORNER SHOWER BASE**

**Product Features:**

- Durable acrylic construction with fiberglass reinforcement for lasting beauty
- Accessible, low, single threshold design for easy entry and exit
- Center drain location
- Shower drain with stainless steel drain cover included
- Integral water retention flanges to prevent behind-the-wall leaks and makes tiling easier
- Limited Lifetime Warranty

**Nominal Dimensions:**

42" x 42" x 3-1/4"  
(1067 x 1067 x 82mm)

**Compliance Certifications -**

**Meets or Exceeds the Following Specifications:**

- CSA B45.5 / IAPMO Z124




SEE REVERSE SIDE FOR ROUGHING-IN  
DIMENSIONS AND PRODUCT SPECIFICATIONS

**NOTES:**

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH SHOWER  
BASE FOR ADDITIONAL INFORMATION.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the  
range of tolerances established by ANSI Standard CSA B45.5 / IAPMO Z124.  
These measurements are subject to change or cancellation. No responsibil-  
ity is assumed for use of superseded or voided pages.

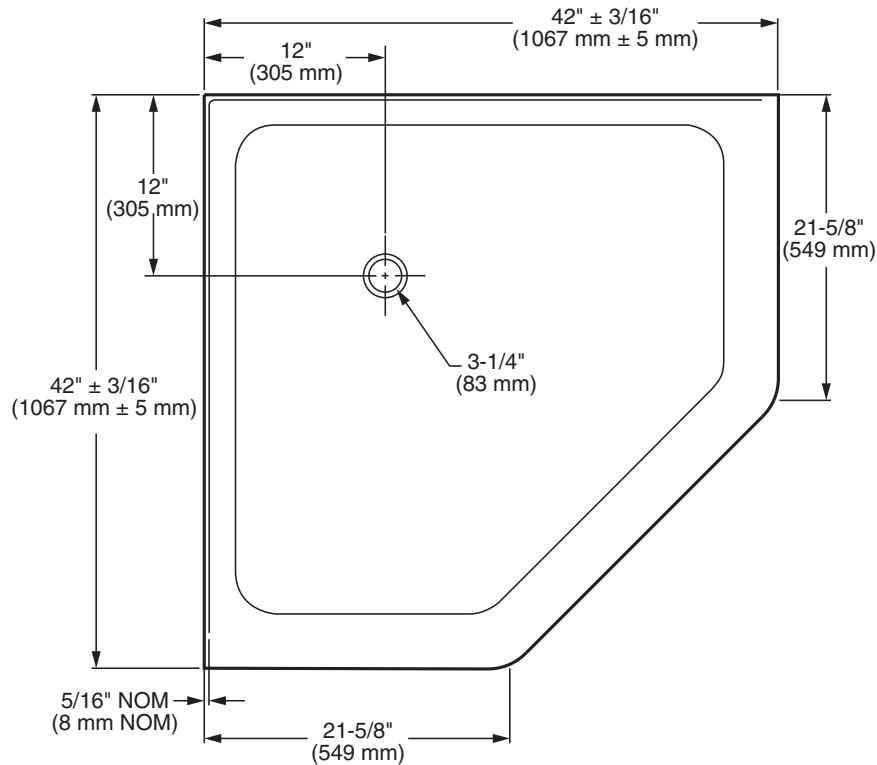

**GENERAL SPECIFICATIONS FOR 4242N-ST3 SHOWER BASE**

INSTALLED SIZE \_\_\_\_\_ 42 x 42 x 3-1/4 IN.  
(1067mm x 1067mm x 82mm)

WEIGHT \_\_\_\_\_ 42 LBS. (23 Kg.)

WEIGHT w/WATER \_\_\_\_\_ 120 LBS. (55 Kg.)

SHOWER WELL AT SUMP \_\_\_\_ 34-7/8 x 34-7/8 IN. (886mm x 886mm)

SHOWER WELL AT RIM \_\_\_\_ 36-3/8 x 36-3/8 IN. (924mm x 924mm)

FLOOR LOADING \_\_\_\_\_ 11 LBS./SQ. FT. (54 Kgs/Sq. m.)  
(PROJECTED AREA)