

## TOWNSEND® 60" x 36" SHOWER BASE SOLID SURFACE

# TOWNSEND® 60" x 36" SOLID SURFACE SHOWER BASE

- G036SMLHOL Left Side Trench Drain
- **6036SMRHOL** Right Side Trench Drain

#### **Product Features:**

- Durable 100% solid, non-porous material
- Smooth matte surface
- Integral 3-sided 1" tiling / water retention flange for easy installation
- Low 2" threshold height
- Repairable and renewable surface
- Fungi and bacterial resistant
- Self-extinguishing
- UV resistant
- Resistant to stains and impact
- Easy maintenance and cleaning
- Drain not included

### Nominal Dimensions:

60" x 36" x 2" (1524 x 914 x 51mm)

#### Shower Base Includes:

• Removable solid surface trench drain cover

## Compliance Certifications -

## Meets or Exceeds the Following Specifications:

- CSA B45.5 / IAPMO Z124
- IAPMO R&T cUPC
- Class A rating per ASTM E84 tunnel test

	<u>Flame</u>	<u>Smoke</u>
ASTM E84-17a	0 (Zero)	20

<ul> <li>Tested against CAN/ULC S102.2-10</li> </ul>		
	<u>Flame</u>	<u>Smoke</u>
CAN/ULC S102.2-10	0 (Zero)	15



6036SMLHOL




6036SMRHOL

SEE REVERSE SIDE FOR ROUGHING-IN DIMENSIONS

© 2018 AS America Inc.



#### 6036SMLHOL Left Side Trench Drain

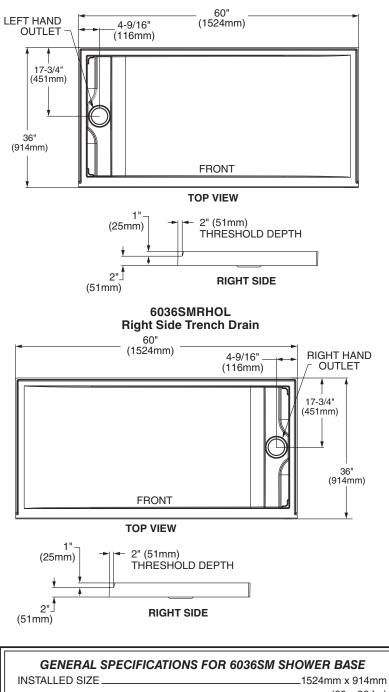

	152411111 × 91411111	
	(60 x 36 ln.)	
WEIGHT	58.6 Kg. (129 Lbs.)	
SHOWER WELL AT SUMP	1429mm x 795mm (56-3/16 x 31-5/16 ln.)	
SHOWER WELL AT RIM	1437mm x 817mm (56-5/8 x 32-3/16 ln.)	
FLOOR LOADING	42 Kgs/Sq. m. (9 Lbs./Sq. Ft.)	
(PROJECTED AREA)		