

**AXIS™ 38" CURVED SHOWER  
BASE AND DRAIN**

❑ **3838A-ST3 CURVED SHOWER BASE**

**Product Features:**

- Durable acrylic construction with fiberglass reinforcement for lasting beauty
- Accessible, low, single threshold design for easy entry and exit
- Curved design for more comfortable floor space
- Center drain location
- Shower drain with stainless steel drain cover included
- Integral water retention flanges to prevent behind-the-wall leaks and makes tiling easier
- Limited Lifetime Warranty



**Nominal Dimensions:**

38" x 38" x 3-1/4"  
(965 x 965 x 82mm)

**Compliance Certifications -**

**Meets or Exceeds the Following Specifications:**


- CSA B45.5 / IAPMO Z124

SEE REVERSE SIDE FOR ROUGHING-IN  
DIMENSIONS AND PRODUCT SPECIFICATIONS

**NOTES:**

REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH SHOWER  
BASE FOR ADDITIONAL INFORMATION.

**IMPORTANT:** Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard CSA B45.5 / IAPMO Z124. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

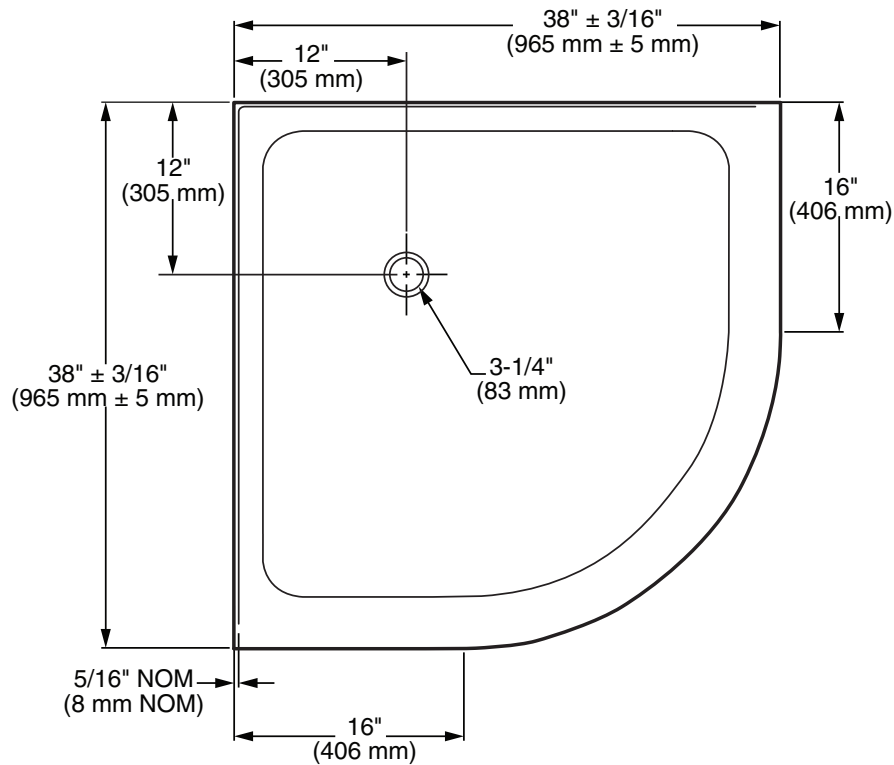

**GENERAL SPECIFICATIONS FOR 3838A-ST3 SHOWER BASE**

INSTALLED SIZE \_\_\_\_\_ 38 x 38 x 3-1/4 IN.  
(965mm x 965mm x 82mm)

WEIGHT \_\_\_\_\_ 35.5 LBS. (16 Kg.)

WEIGHT w/WATER \_\_\_\_\_ 95 LBS. (43 Kg.)

SHOWER WELL AT SUMP \_\_\_\_\_ 30-7/8 x 30-7/8 IN. (784mm x 784mm)

SHOWER WELL AT RIM \_\_\_\_\_ 32-3/8 x 32-3/8 IN. (822mm x 822mm)

FLOOR LOADING \_\_\_\_\_ 10 LBS./SQ. FT. (50 Kgs/Sq. m.)  
(PROJECTED AREA)