



T508.508 Bath/Shower Trim Shown

GENERAL DESCRIPTION:

SHOWERHEAD

FloWise water saving single function showerhead offers 40% savings at maximum 1.5 gpm/5.7 L/min. flow rate.

WALL TUB SPOUT

Metal slip-on diverter spout.

WALL VALVE TRIM


Available with metal lever handle.
 Metal wall escutcheon.

MODEL NUMBER:

TRIM KITS:

- **T508.508 Princeton BATH/SHOWER Trim Kit**
 Metal Lever Handle. FloWise Showerhead.
 LESS Valve Body.
- **T508.507 Princeton Soft SHOWER ONLY Trim Kit**
 Metal Lever Handle. FloWise Showerhead. LESS Valve Body.

*For use with R120 Series Pressure Balance Valves.
 See reverse side for available Rough Valves.*

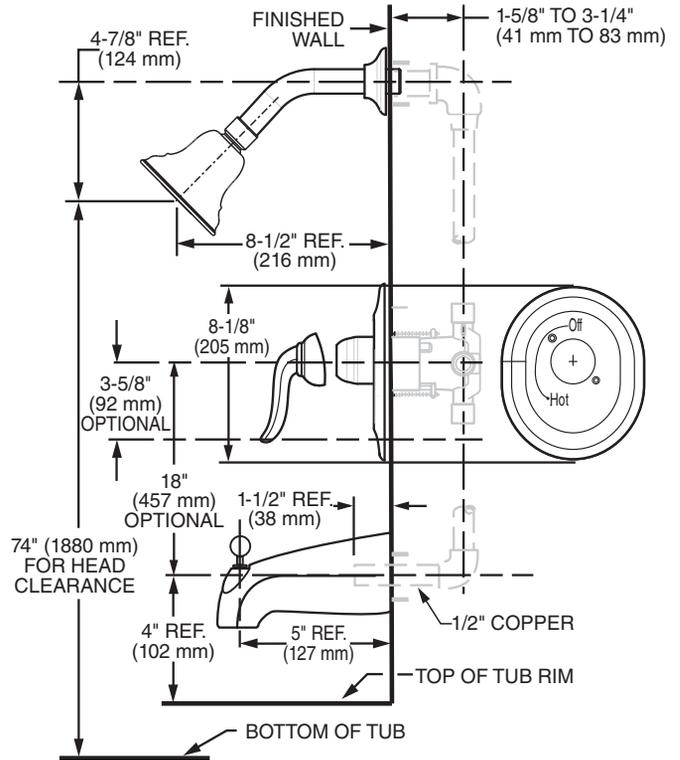

SUGGESTED SPECIFICATION:

Bath/shower fitting shall feature a water saving showerhead with Max. 1.5gpm/5.7L/min. flow rate. Fitting shall be: American Standard - Trim Kit Model # T508.50_... and Valve Body Model # R12_.


CODES AND STANDARDS

These products meet or exceed the following codes and standards:

- ANSI A 117.1
- ASSE 1016
- ASME A112.18.1
- CSA B 125.1



• Showerhead with 1.5gpm/5.7L.min. flow restrictor.

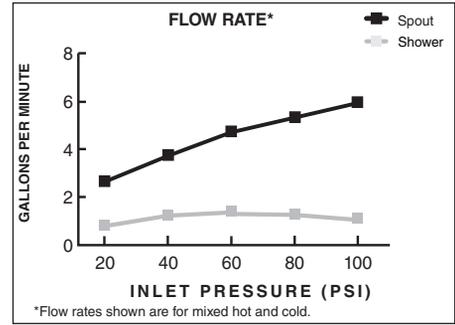

| TRIM KITS * | Product Number | Description | * TRIM & ROUGH MUST BE ORDERED SEPARATELY. | | | Finish Options | | |
|-------------|----------------|--|--|--|--|-----------------|-------------------|------------------|
| | | | | | | Polished Chrome | Oil Rubbed Bronze | PVD Satin Nickel |
| | | | | | | 002 | 224 | 295 |
| | T508.508 | Bath/Shower Trim Kit. Metal Lever Handle. LESS Valve Body. FloWise Showerhead. | | | | | | |
| | T508.507 | Shower Only Trim Kit. Metal Lever Handle. LESS Valve Body. FloWise Showerhead. | | | | | | |

| ROUGH VALVE BODIES | Product Number | Description |
|--------------------|----------------|---|
| | R121 | Rough Valve Body less trim. Universal inlets/outlets. |
| | R121SS | Rough Valve Body less trim. Universal inlets/outlets with Screwdriver Stops. |
| | R120 | Rough Valve Body less trim. Direct Sweat inlets/outlets. |
| | R120SS | Rough Valve Body less trim. Direct Sweat inlets/outlets with Screwdriver Stops. |
| | R125 | Rough Valve Body less trim. Female Thread inlets/outlets. |
| | R125SS | Rough Valve Body less trim. Female Thread inlets/outlets with Screwdriver Stops. |
| | R127 | Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807). |
| | R127SS | Rough Valve Body less trim. PEX inlets/universal outlets for Crimp Ring PEX system (ASTM F1807) with Screwdriver Stops. |
| | R128 | Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960). |
| | R128SS | Rough Valve Body less trim. PEX inlets/universal outlets for Cold Expansion PEX system (ASTM F1960) with Screwdriver Stops. |
| | R129 | Rough Valve Body less trim. CPVC inlets/universal outlets. |
| | R129SS | Rough Valve Body less trim. CPVC inlets/universal outlets with Screwdriver Stops. |

Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.